


City




City 1590↓ × 600↔ SX
colour: Soft 9005

Angled integrated thermostatic valve set with immersion tube, right, chrome
Integrated pipe-masking set, chrome
KTX 2 heating element, black

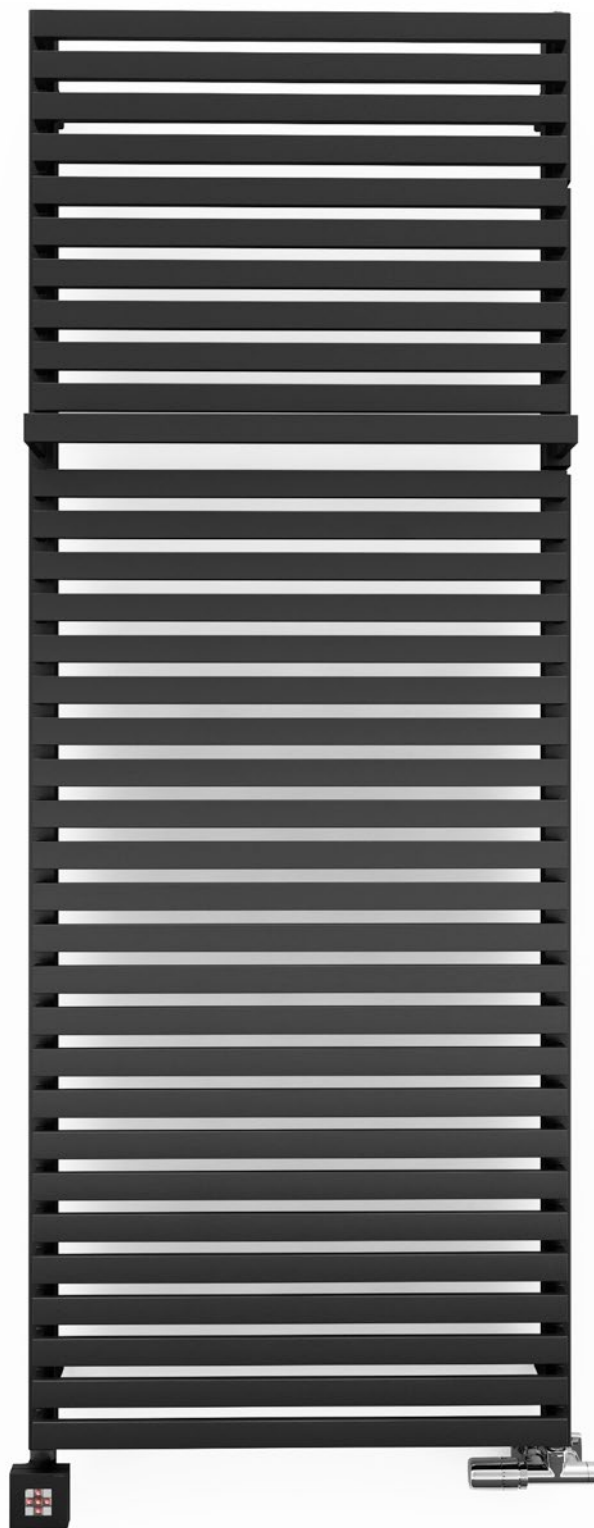


TERMA
SINCE 1990

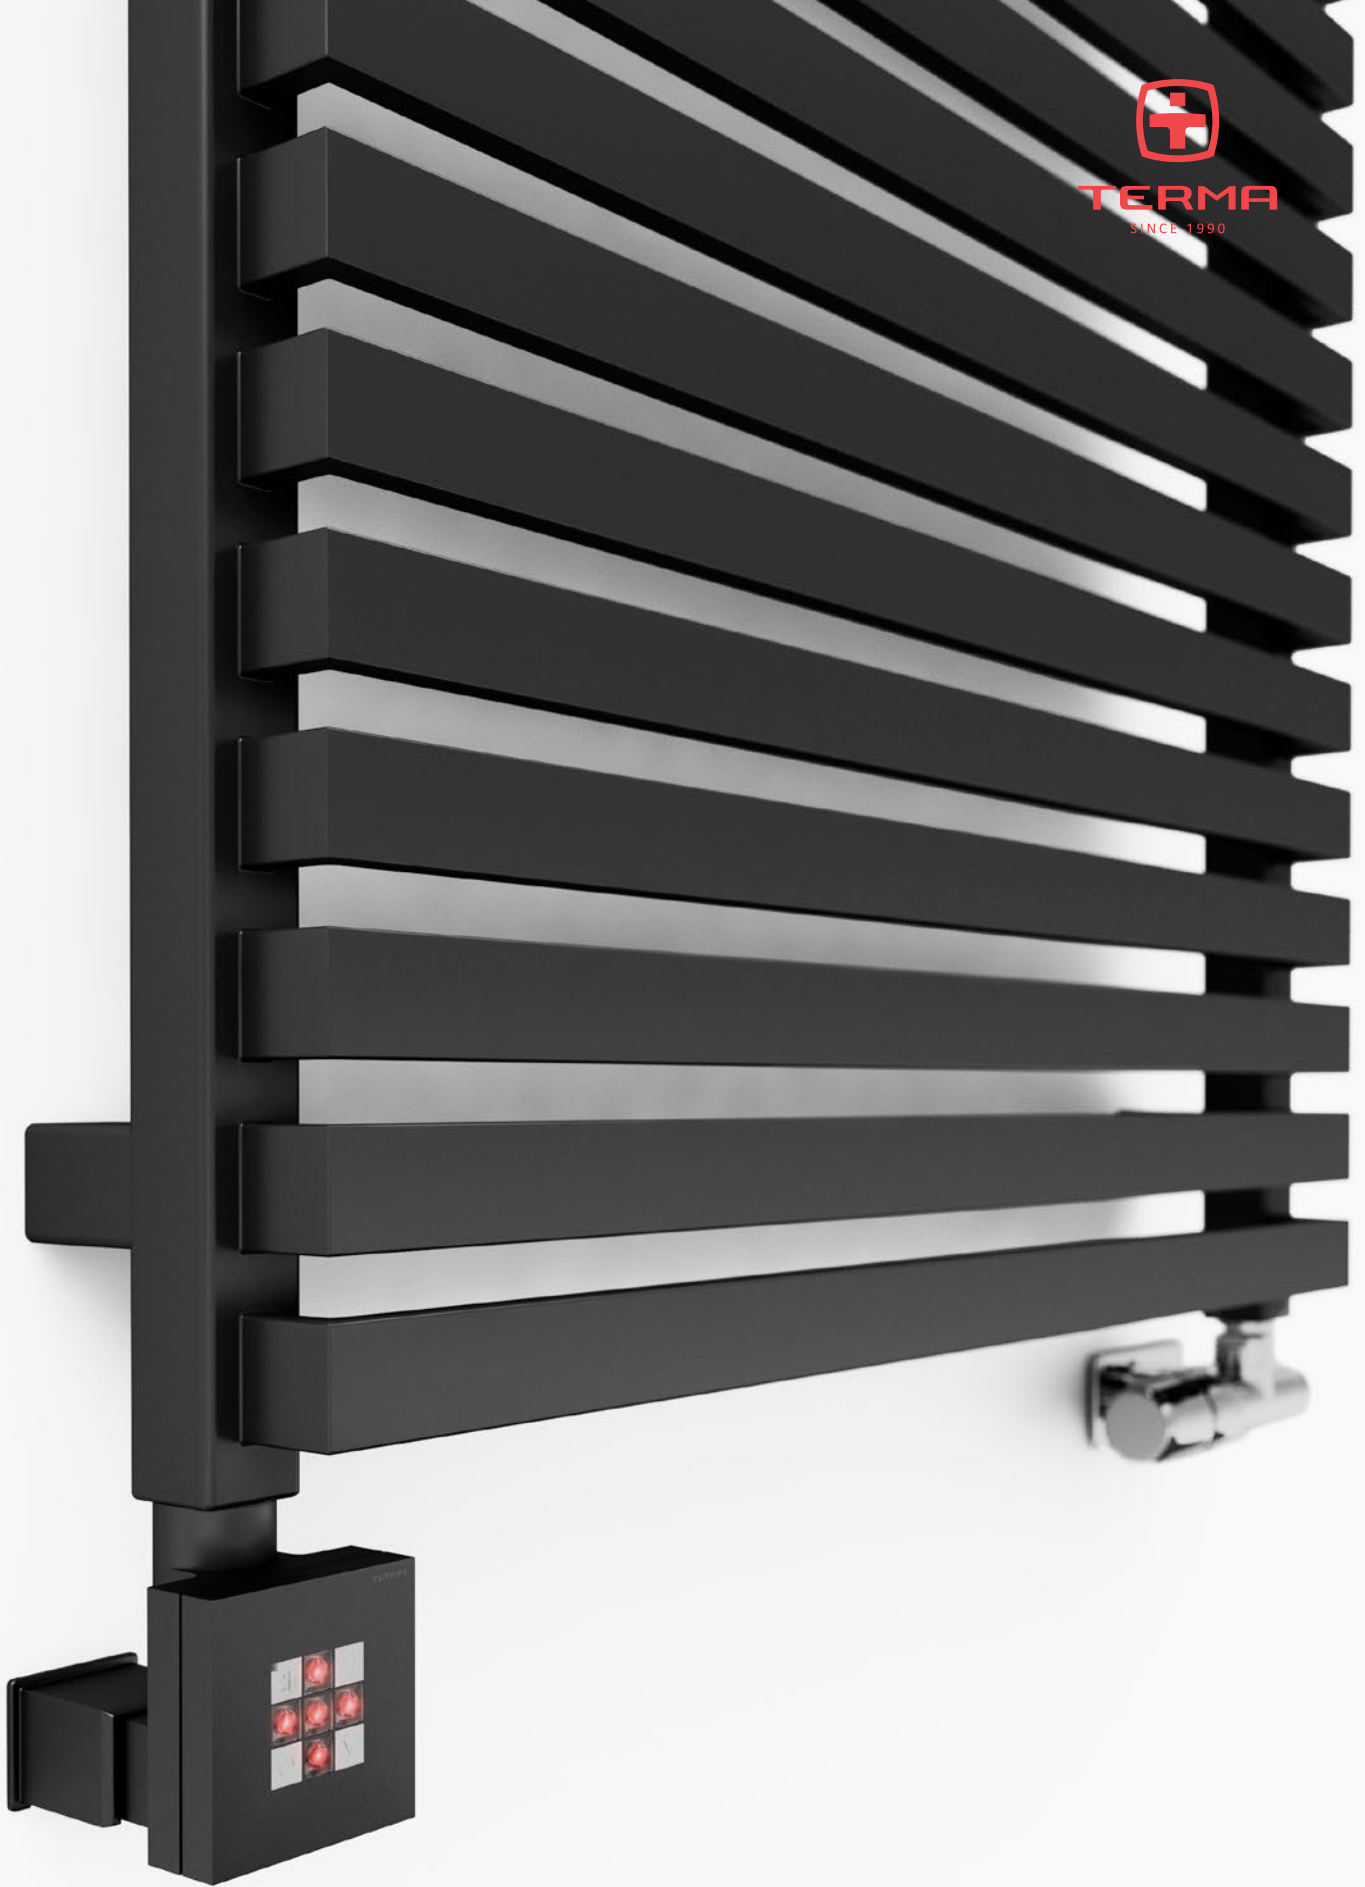




Standard connection:





Electric radiators:




Optional connection:


A \updownarrow 510÷1860:



A \updownarrow 780÷1860:



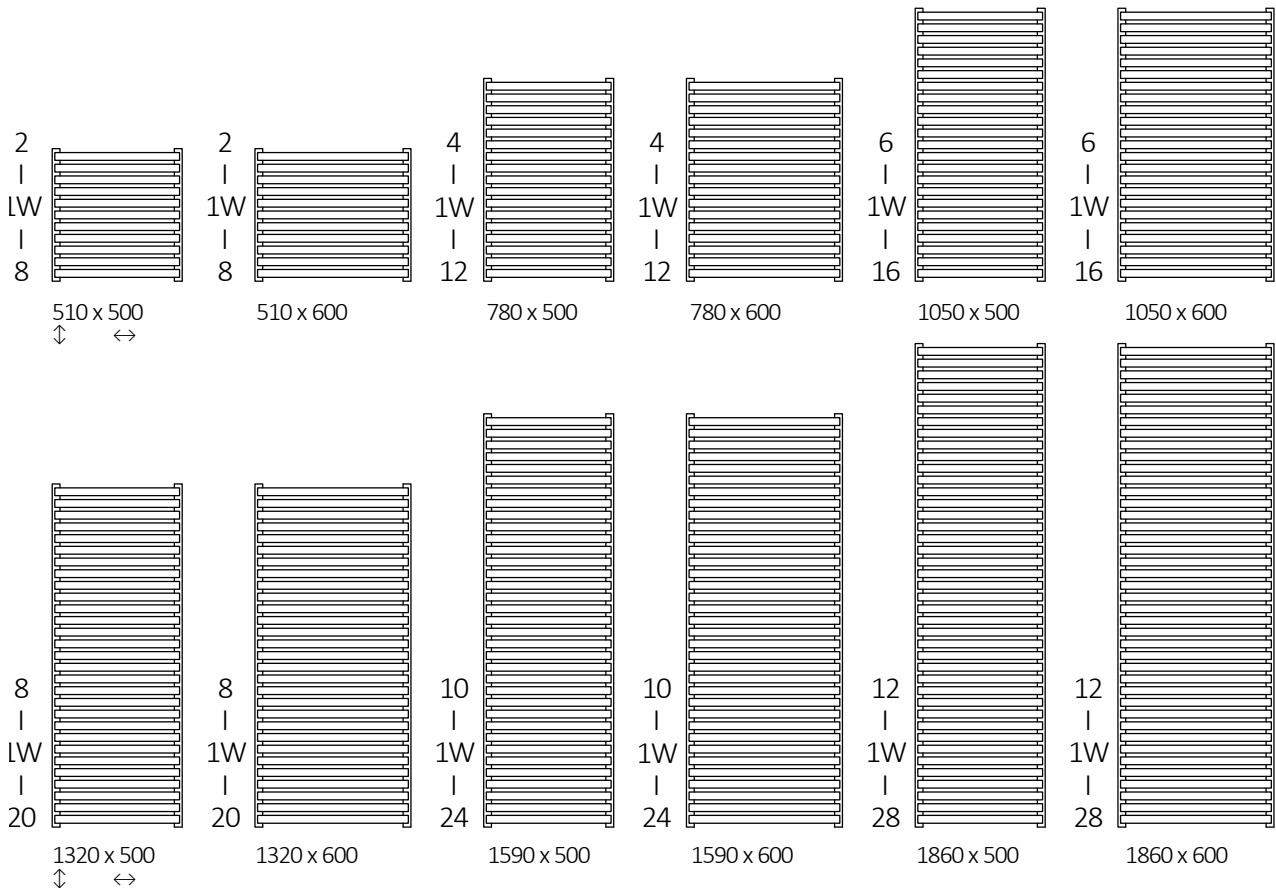

Available sizes:



Specification:


Working pressure: 1000 kPa Maximum operating temperature: 95°C

A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65 20°C [W]	55/45 20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	H [dm³]	 [kg]	Product code <small>Configuration code p. 6</small>
510	500	50	304	164	300	470	330	90	1,82	6,59	WGCIT051050
510	600	50	362	195	400	570	330	90	2,03	7,57	WGCIT051060
780	500	50	455	245	400	470	600	90	2,81	10,12	WGCIT078050
780	600	50	541	291	600	570	600	90	3,13	11,63	WGCIT078060
1050	500	50	600	323	600	470	870	90	3,79	13,64	WGCIT105050
1050	600	50	714	384	800	570	870	90	4,23	15,69	WGCIT105060
1320	500	50	739	397	800	470	1140	90	4,78	17,17	WGCIT132050
1320	600	50	879	473	800	570	1140	90	5,32	19,76	WGCIT132060
1590	500	50	887	476	800	470	1410	90	5,66	20,26	WGCIT159050
1590	600	50	1055	566	1000	570	1410	90	6,30	23,30	WGCIT159060
1860	500	50	1032	553	1000	470	1680	90	6,74	24,29	WGCIT186050
1860	600	50	1227	657	1200	570	1680	90	7,52	27,95	WGCIT186060




Technical drawing:


SX

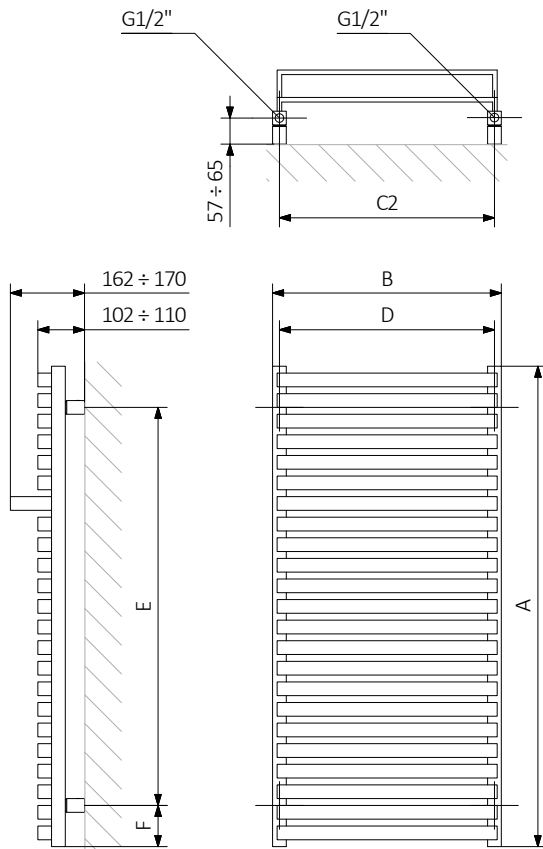

Z1

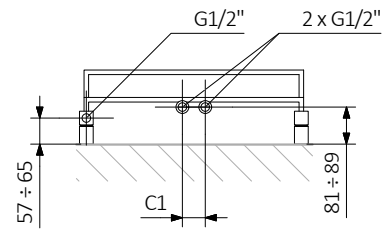


Z8

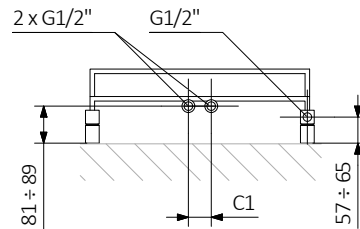


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:





In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a water and dual fuel radiator product and configuration code:

WGCIT051050

PRODUCT CODE
(located in the table for the product)

K916SX

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

K 916 SX

Package code

K - carton box

Colour code

Connection code

Construction of electric heater configuration code:

WLCIT051050

PRODUCT CODE
(located in the table for the product)

K916E1DRYW

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

K 916 E1 DRY W

Package code

K - carton box

Colour code

Connection code

Heating element code

Type of heating element cable code

Epoxy primer

E – Code of epoxy primer is an extra processes.

WGCIT051050 K916SX

E — Extra processes or additions code



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.