

GRADDA INOX



GRADDA INOX


Material	stainless steel profiles 30 × 30 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of profiles	12
Surface treatment	brushed stainless steel




GRADDA INOX 1840 × 500

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input stainless steel [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1840/500	48	11,2	5,6	1,30	429	348	221	-	470

Thermal power measuring follows in accordance with EN 442.
Accessories (page 64, 65 and 66) is not part of the radiator.



Connection options

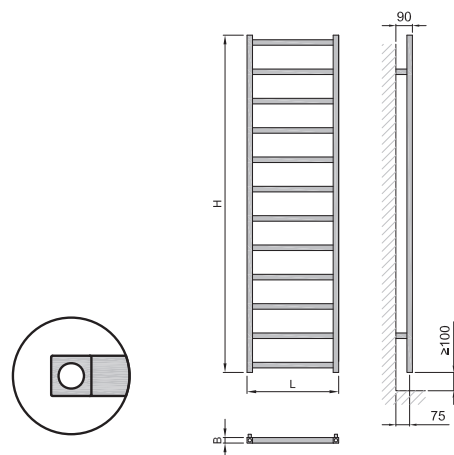

DXGR 1840 0500...