


Mike One




Mike One 735↑ × 530⇔ S8
colour: RAL 6004

Angled integrated thermostatic valve set with immersion tube, left, chrome
Integrated pipe-masking set, chrome
ONE heating element

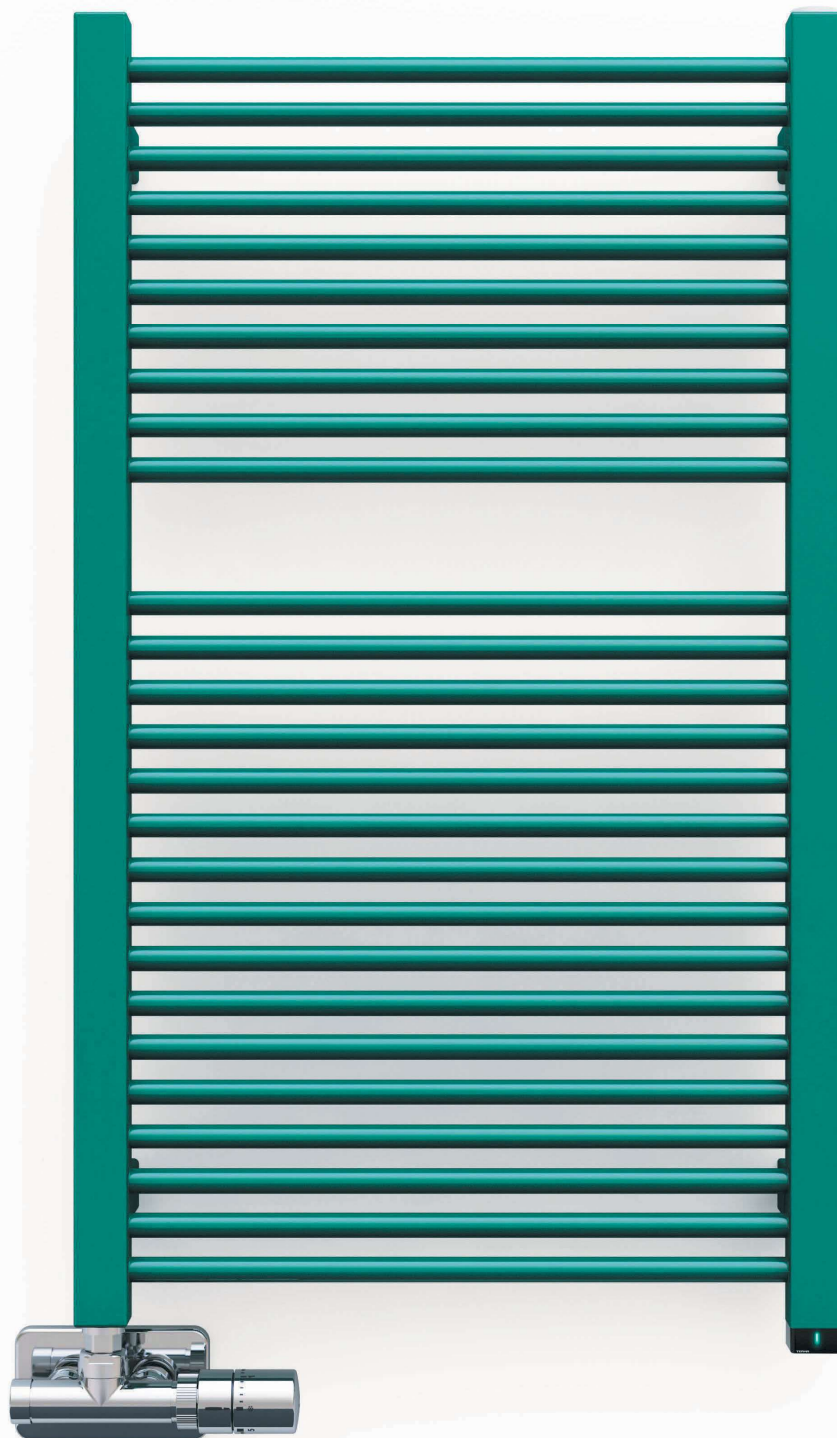




Standard connections:



Optional connections:



Electric radiators:






Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 82°C

Electrical specification:


Power supply:	230 V / 50 Hz
Device protection class:	Class I
Ingress protection [IP]:	IPx5

A ↓ [mm]	B ↔ [mm]	C3	C5	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm²]	 [kg]	Product Code <small>configuration code p. 5</small>
Paint												
735	430	695	500	337	176	400	400	595	70	2,00	5,92	WZMIN073043
735	530	695	500	407	213	400	500	595	70	2,27	6,99	WZMIN073053
1035	430	995	500	467	245	400	400	895	70	2,82	8,21	WZMIN103043
1035	530	995	500	563	295	600	500	895	70	3,20	9,69	WZMIN103053
1335	430	1295	500	593	312	600	400	1195	70	3,64	10,51	WZMIN133043
1335	530	1295	500	716	376	800	500	1195	70	4,12	12,40	WZMIN133053
1635	430	1595	500	716	377	800	400	1495	70	4,46	12,81	WZMIN163043
1635	530	1595	500	864	454	800	500	1495	70	5,05	15,11	WZMIN163053
710	230	670	500	186	97	200	200	570	70	1,34	3,38	WZMIN071023
960	230	920	500	248	130	300	200	820	70	1,82	4,52	WZMIN096023
1210	230	1170	500	309	162	300	200	1070	70	2,31	5,66	WZMIN121023
1460	230	1420	500	368	193	400	200	1320	70	2,80	6,80	WZMIN146023
1710	230	1670	500	426	224	400	200	1570	70	3,29	7,94	WZMIN171023
Plating												
735	430	695	500	236	121	200	400	595	70	2,00	5,68	WZMIN073043
735	530	695	500	285	145	300	500	595	70	2,27	6,71	WZMIN073053
1035	430	995	500	327	167	300	400	895	70	2,82	7,89	WZMIN103043
1035	530	995	500	395	201	400	500	895	70	3,20	9,31	WZMIN103053
1335	430	1295	500	415	212	400	400	1195	70	3,64	10,09	WZMIN133043
1335	530	1295	500	501	256	600	500	1195	70	4,12	11,90	WZMIN133053
1635	430	1595	500	502	256	600	400	1495	70	4,46	12,30	WZMIN163043
1635	530	1595	500	605	309	600	500	1495	70	5,05	14,50	WZMIN163053
710	230	670	500	130	67	120	200	570	70	1,34	3,25	WZMIN071023
960	230	920	500	174	89	200	200	820	70	1,82	4,35	WZMIN096023
1210	230	1170	500	216	110	200	200	1070	70	2,31	5,45	WZMIN121023
1460	230	1420	500	258	132	300	200	1320	70	2,80	6,54	WZMIN146023
1710	230	1670	500	298	152	300	200	1570	70	3,29	7,64	WZMIN171023

Mike One




Available sizes:

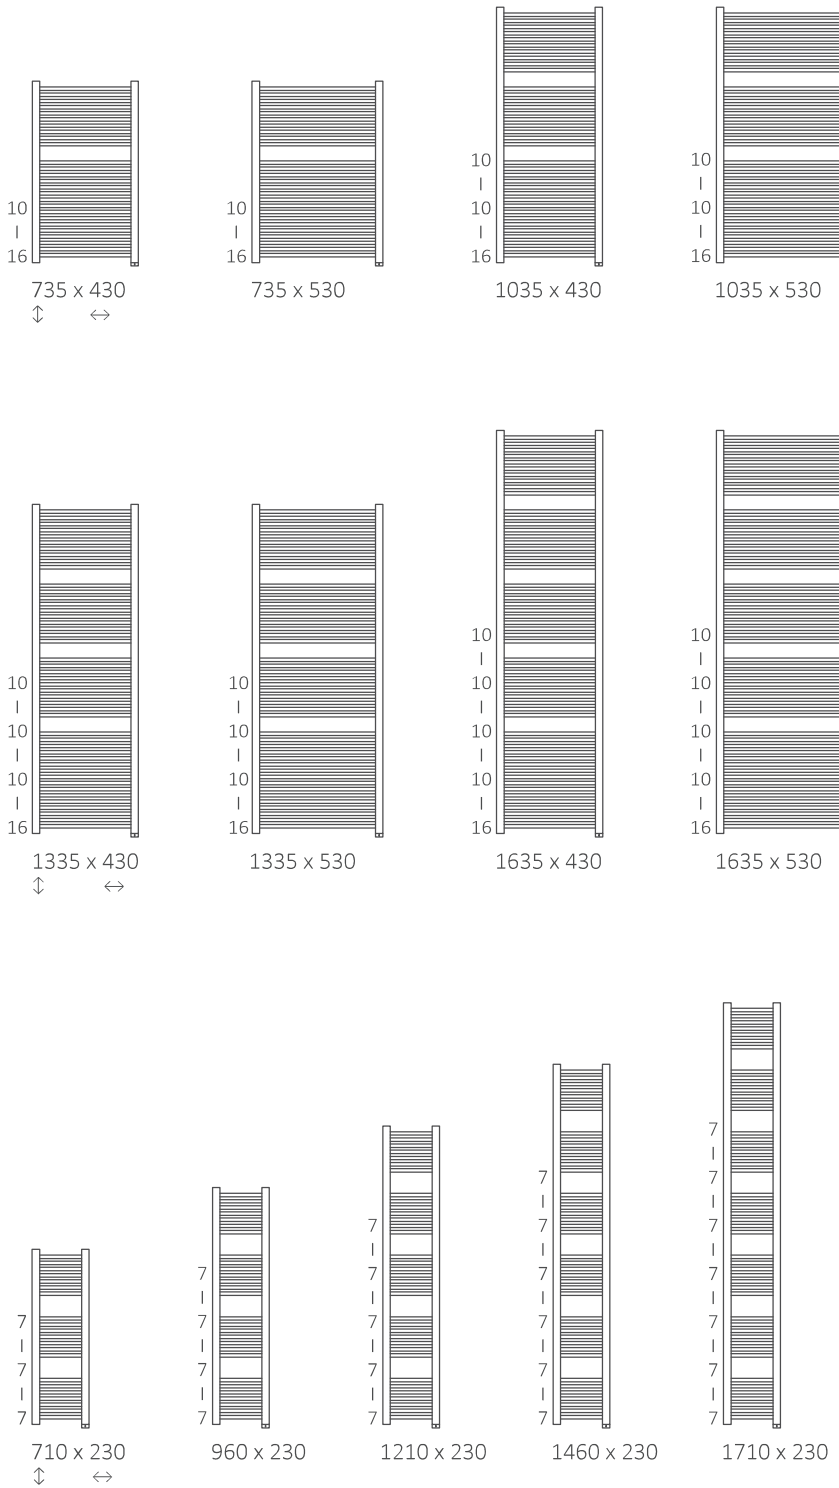




Technical drawing:


S8

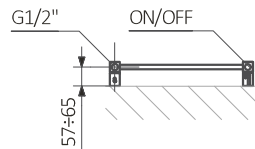



S1



51



58

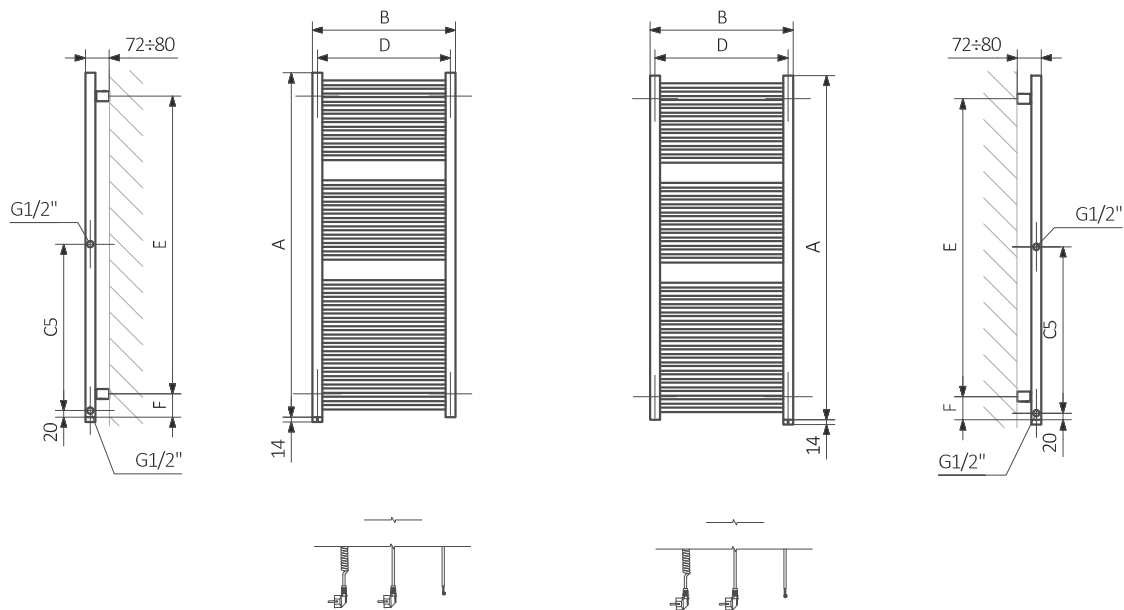

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector : Pipe :





In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a configuration code of a water radiator with a built-in One heating element:

WZMIN073043

PRODUCT CODE
(located in the table for the product)

K916S1

CONIGURATION CODE
(supplemented by hand)

Cable Type

W - straight cable with plug
P - straight cable without plug
U - spiral cable with plug

Example Configuration

K 916 S1 W

Package code Plate color code Connection code Cable Type code
K - carton box

The Construction of the product and configuration code for a radiator with the built-in heating element ONE:

WWMIN073043

PRODUCT CODE
(located in the table for the product)

K916E1

CONIGURATION CODE
(supplemented by hand)

Cable Type

W - straight cable with plug
P - straight cable without plug
U - spiral cable with plug

Example Configuration

K 916 E1 P

Package code Plate color code Connection code Cable Type code
K - carton box

Epoxy primer

E - Code of epoxy primer is an extra processes.

WZMIN073043 K916S1 **E** — Extra processes or additions code

Mike One



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.