


DXVE 0600 1020...



DXVE 0600 1425...

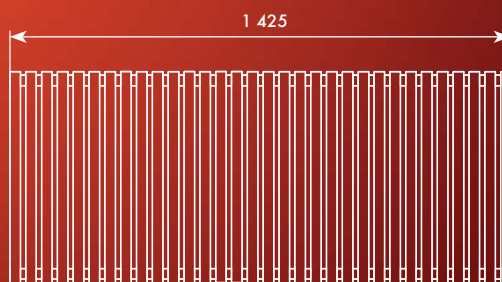

INOX

Material	stainless steel prof. horizontal 30×30 mm stainless steel profiles 30×20 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of profiles	23, 32
Surface treatment	brushed stainless steel

Height [mm]	Length [mm]	Depth [mm]	Connection span [mm]	Weight [kg]	Water capacity [l]	Heating Output [W] 75/65/20 °C	Recommended power input stainless steel [W]
600	1 020	50	550	16,9	7,5	537	-
600	1 425	50	550	23,6	10,4	748	-

Connection fittings are not part of the radiator.

Thermal power measuring follows in accordance with EN442.