



Daikin Altherma mid
temperature split
Technical Data
EPRA08-12EW



TABLE OF CONTENTS

EPRA08-12EW

1	Features	4
	EPRA08-12EW	4
2	Specifications	5
3	Electrical data	87
4	Capacity graphs	89
	Cooling Capacity Graphs	89
	Cooling Capacity Graphs - quiet mode	90
	Heating Capacity Graphs	91
	Heating Capacity Graphs - quiet mode	92
5	Capacity tables	93
	Certification Programs	93
	Domestic Hot Water performance	94
6	Dimensional drawings	95
7	Piping diagrams	96
8	Wiring diagrams	97
	Wiring Diagrams - Three Phase	97
9	Sound data	98
	Sound Pressure Spectrum	98
10	Installation	100
	Installation Method	100
11	Operation range	101

1 Features

1 - 1 EPRA08-12EW

- › Outdoor unit extracts heat from the outdoor air, even at -28°C
- › By heat pump operation only, the outdoor unit delivers a leaving water temperature of 65°C at -15°C ambient temperature
- › By -15°C ambient temperature, the outdoor unit limits heating capacity loss
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A, leads directly to lower energy consumption thanks to its high energy efficiency and has a 30% lower refrigerant charge
- › WLAN cartridge included




Guaranteed operation down to -28°C



Daikin Residential Controller (optional)

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications					ETBH12E6V + EPRA08EW1	ETBH12E6V + EPRA10EW1	ETBH12E6V + EPRA12EW1	
Indoor unit					ETBH12EF6V			
Outdoor unit					EPRA08EAW1	EPRA10EAW1	EPRA12EAW1	
Heating capacity	Min.	kW			3.44 (1)			
	Nom.	kW			6.17 (2)			
	Max.	kW			7.95 (1)	9.25 (1)	9.97 (1)	
Power input	Heating	Min.	kW			0.70 (3)		
		Nom.	kW			1.21 (2)		
		Max.	kW			1.63 (3)	1.98 (3)	2.21 (3)
COP					5.10 (2)			
Pump	Type				Grundfos UPM3LK			
	Nominal ESP unit	Heating	kPa			63.0 (4)		
Water side Heat exchanger	Water flow rate	Heating	Nom.	l/min	18.3 (2)			
General	Supplier/Manufacturer details	Name and address			Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium			
		Name or trademark			Daikin Europe N.V.			
	Product description	Air-to-water heat pump			Yes			
		Brine-to-water heat pump			No			
		Heat pump combination heater			No			
		Low-temperature heat pump			No			
		Supplementary heater integrated			Yes			
	LW(A) Sound power level (according to EN14825)	Indoor			dB(A)			44.0
Outdoor			dB(A)			53.0		
Sound condition Ecodesign and energy label					Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825			
Space heating general	Air to water unit	Rated airflow (outdoor)			m ³ /h			3,542
		Other	Capacity control			Inverter		
	Pck (Crankcase heater mode)			kW			0.000	
	Poff (Off mode)			kW			0.027	
	Psb (Standby mode)			kW			0.027	
	Pto (Thermostat off)			kW			0.024	
	Integrated supplementary heater	Psup			kW			6.0
		Type of energy input			Electrical			
Space heating 	Average climate water outlet 55°C	General	Annual energy consumption	kWh	4,993	4,970		
			ηs (Seasonal space heating efficiency)	%	138			
			Prated at -10°C	kW	8.5			
			Qhe Annual energy consumption (GCV)	Gj	18			
			SCOP		3.52	3.53		

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETBH12E6V + EPRA08EW1	ETBH12E6V + EPRA10EW1	ETBH12E6V + EPRA12EW1	
Space heating Average climate water outlet 55°C	General	Seasonal space heating eff. class			A++		
		A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)		1.0		
			COPd		2.30		
			Pdh kW		7.6		
			PERd %		91.9		
			Cdh (Degradation heating)		1.0		
			COPd		3.50		
			Pdh kW		4.6		
			PERd %		140.0		
			Cdh (Degradation heating)		1.0		
		COPd		4.61			
		Pdh kW		3.0			
		PERd %		184.2			
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0		
			COPd		6.16		
			Pdh kW		3.7		
			PERd %		246.4		
		Tol (temperature operating limit)	COPd	2.01		2.05	
			Pdh kW	7.0		8.3	
			PERd %	80.2		82.1	
		TOL °C			-10		
		WTOL °C			55		
	Rated heat output supplementary capacity	Psup (at Tdesign -10°C) kW	1.5		0.0		
	Tbiv (bivalent temperature)	COPd	2.30		2.05		
		Pdh kW	7.6		8.3		
		PERd %	91.9		82.1		
		Tbiv °C	-7		-10		
Cold climate water outlet 55°C	General	Annual energy consumption kWh	7,088		6,950	6,921	
		ηs (Seasonal space heating efficiency) %	122			125	
		Prated at -22°C kW			9.0		
		Qhe Annual energy consumption (GCV) GJ	26		25		
		A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)		1.0		
			COPd		2.61		
			Pdh kW		5.2		
			PERd %	104.2		104.4	
		B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)		1.0		
		COPd		3.90			

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications					ETBH12E6V + EPRA08EW1	ETBH12E6V + EPRA10EW1	ETBH12E6V + EPRA12EW1	
Space heating Cold climate water outlet 55°C	B Condition (2°CDB/1°CWB)	Pdh	kW			3.3		
		PERd	%			156.0		
		C Condition (7°CDB/6°CWB)	Cd _h (Degradation heating)				1.0	
			COP _d				4.96	
			Pdh	kW			3.4	
			PERd	%			198.3	
		D Condition (12°CDB/11°CWB)	COP _d				6.56	
			Pdh	kW			4.2	
			PERd	%			262.5	
		Tol (temperature operating limit)	COP _d			1.49	1.56	1.62
	Pdh		kW		4.9	6.1	7.2	
	PERd		%		59.6	62.3	64.7	
	TOL		°C			-22		
	WTOL					55		
	G Condition (-15°CDB/)	COP _d			2.00		2.03	
		Pdh	kW		6.0		7.2	
		PERd	%		80.0		81.2	
	T _{biv} (bivalent temperature)	COP _d			2.25		2.03	
Pdh		kW		6.6		7.2		
PERd		%		90.0		81.2		
T _{biv}					-12	-15		
	Rated heat output supplementary capacity	P _{sup} (at T _{design} -22°C)	kW		4.1	2.9	1.8	
Warm climate water outlet 55°C	General	Annual energy consumption	kWh			2,972		
		η _s (Seasonal space heating efficiency)	%			170		
		Prated at 2°C	kW			9.6		
		Q _{he} Annual energy consumption (GCV)	Gj			11		
	B Condition (2°CDB/1°CWB)	Cd _h (Degradation heating)				1.0		
		COP _d				2.66		
	C Condition (7°CDB/6°CWB)	Pdh	kW			8.0		
		PERd	%			106.5		
	D Condition (12°CDB/11°CWB)	Cd _h (Degradation heating)				1.0		
COP _d					3.79			
Pdh					6.7			
					151.5			
				1.0				
				5.87				
				3.6				

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications					ETBH12E6V + EPRA08EW1	ETBH12E6V + EPRA10EW1	ETBH12E6V + EPRA12EW1	
Space heating Warm climate water outlet 55°C Average climate water outlet 35°C	D Condition (12°CDB/11°CWB)	PERd	%		234.9			
		Tbiv	COPd		3.13			
		(bivalent)	Pdh	kW	8.4			
		tempera- ture)	PERd	%	125.4			
	General	Tbiv	°C		4			
		Annual energy consumption	kWh		3,561		3,539	
		ηs (Seasonal space heating efficiency)	%		190		191	
		Prated at -10°C	kW		8.3			
		Qhe Annual ener- gy consumption (GCV)	Gj		13			
		SCOP			4.81		4.84	
		Seasonal space heating eff. class			A+++			
		A Condition (7°CDB/-8°CWB)	COPd			3.20		
			Pdh	kW		7.5		
			PERd	%		128.0		
	B Con- dition (2°CDB- B/1°CWB)	CdH (Degradation heating)			1.0			
		COPd			4.93			
		Pdh	kW		4.4			
	C Con- dition (7°CDB- B/6°CWB)	CdH (Degradation heating)			1.0			
		COPd			6.37			
		Pdh	kW		4.3			
D Condition (12°CDB/11°CWB)	CdH (Degradation heating)			1.0				
	COPd			8.13				
	Pdh	kW		6.6				
Tol (tem- perature operat- ing limit)	PERd	%		325.2				
	COPd			2.90		2.86		
	Pdh	kW		6.9		8.1		
	PERd	%		116.0		114.4		
	TOL	°C		-10				
Tbiv (bivalent tempera- ture)	WTOL	°C		35				
	COPd			3.20		2.86		
	Pdh	kW		7.5		8.1		
	PERd	%		128.0		114.4		
	Tbiv	°C		-7		-10		
Rated heat output supple- mentary capacity	Psup (at Tdesign -10°C)	kW		1.4		0.0		
Cold climate water outlet 35°C	General	Annual energy consumption	kWh	5,394	5,239	5,224		

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETBH12E6V + EPRA08EW1	ETBH12E6V + EPRA10EW1	ETBH12E6V + EPRA12EW1	
Space heating Cold climate water outlet 35°C	General	η_s (Seasonal space heating efficiency) Prated at -22°C Qhe Annual energy consumption (GCV)	%	162	166	167	
			kW		9.0		
			Gj		19		
			A Condition (7°CDB/-8°CWB)	COPd		3.48	
				Pdh kW		5.4	
				PERd %		139.2	
			B Condition (2°CDB/-8°CWB)	Cdh (Degradation heating)		1.0	
				COPd		5.40	
				Pdh kW		3.6	
			C Condition (7°CDB/-6°CWB)	Cdh (Degradation heating)		1.0	
				COPd		6.53	
				Pdh kW		5.3	
			D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0	
				COPd		7.98	
				Pdh kW		6.6	
			Tol (temperature operating limit)	PERd %		319.0	319.2
				COPd		2.11	2.14
				Pdh kW		4.9	5.9
			G Condition (-15°CDB/)	PERd %		84.3	85.6
				TOL °C		-22	-22
				WTOL °C		35	35
			Tbiv (bivalent temperature)	COPd		2.68	2.64
				Pdh kW		6.0	7.0
				PERd %		107.1	105.6
Rated heat output supplementary capacity	Tbiv °C		2.95	2.64			
	Pdh kW		6.5	7.0			
	PERd %		118.1	105.6			
Warm climate water outlet 35°C	Tbiv °C		-12	-15			
	Psup (at Tdesign -22°C) kW		4.1	3.1			
				2.6			
Space heating Warm climate water outlet 35°C	General	Annual energy consumption kWh η_s (Seasonal space heating efficiency) Prated at 2°C Qhe Annual energy consumption (GCV)	kWh	1,954			
			%	232			
			kW	8.6			
			Gj	7			
			B Condition	Cdh (Degradation heating)		1.0	
				COPd		4.07	
				Pdh kW		7.7	
			C Condition (7°CDB/-6°CWB)	PERd %		162.9	
				Cdh (Degradation heating)		1.0	
				COPd		5.85	
			Tbiv (bivalent temperature)	Pdh kW		5.5	
				PERd %		234.1	
Tbiv °C		4.97					
D Condition (12°CDB/11°CWB)	COPd		4.97				
	Pdh kW		6.9				
	PERd %		198.9				
	Tbiv °C		5				
	Cdh (Degradation heating)		1.0				
	COPd		7.85				
	Pdh kW		6.2				
	PERd %		313.9				

(1) Capacity according to standard EN14511 and valid for heated water range $dT = 3-8^\circ\text{C}$ at $T_a 7^\circ\text{C}$ |

(2) Condition: T_a DB/WB $7^\circ\text{C}/6^\circ\text{C}$ - LWC 35°C ($DT = 5^\circ\text{C}$) |

(3) Power input is total input of indoor and outdoor units, including the circulation pump; according to EN14511 |

(4) DB/WB $7^\circ\text{C}/6^\circ\text{C}$ - LWC 35°C ($dT=5^\circ\text{C}$) with pump at full speed |

Cooling: EW 12°C ; LW 7°C ; ambient conditions: 35°CDB |

Cooling: EW 23°C ; LW 18°C ; ambient conditions: 35°CDB |

Test at T_a DB/WB $7^\circ\text{C}/6^\circ\text{C}$. According to EN 16147.

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications					ETBH12E9W + EPRA08EW1	ETBH12E9W + EPRA10EW1	ETBH12E9W + EPRA12EW1	
Indoor unit					ETBH12EF9W			
Outdoor unit					EPRA08EAW1	EPRA10EAW1	EPRA12EAW1	
Heating capacity	Min.	kW			3.44 (1)			
	Nom.	kW			6.17 (2)			
	Max.	kW			7.95 (1)	9.25 (1)	9.97 (1)	
Power input	Heating	Min.	kW			0.70 (3)		
		Nom.	kW			1.21 (2)		
		Max.	kW			1.63 (3)	1.98 (3)	2.21 (3)
COP					5.10 (2)			
Pump	Type				Grundfos UPM3LK			
	Nominal ESP unit	Heating	kPa			63.0 (4)		
Water side Heat exchanger	Water flow rate	Heating	Nom.	l/min	18.3 (2)			
General	Supplier/	Name and address			Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium			
	Manu- facturer details	Name or trademark			Daikin Europe N.V.			
Product descrip- tion	Air-to-water heat pump Brine-to-water heat pump Heat pump combination heater Low-temperature heat pump Supplementary heater integrated Water-to-water heat pump	Air-to-water heat pump			Yes			
		Brine-to-water heat pump			No			
		Heat pump combination heater			No			
		Low-temperature heat pump			No			
		Supplementary heater integrated			Yes			
		Water-to-water heat pump			No			
LW(A) Sound power level (according to EN14825)	Indoor	dB(A)			44.0			
LW(A) Sound power level (according to EN14825)	Outdoor	dB(A)			53.0			
Sound condition Ecodesign and energy label					Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825			
Space heating general	Air to water unit	Rated airflow (outdoor)			m ³ /h			3,542
		Other	Capacity control			Inverter		
	Pck (Crankcase heater mode) kW			0.000				
	Poff (Off mode) kW			0.027				
	Psb (Standby mode) kW			0.027				
	Pto (Thermostat off) kW			0.024				
	Inte- grated supple- mentary heater	Psup kW			9.0			
		Type of energy input			Electrical			
		Average climate water outlet 55°C	General	Annual energy consumption			4,993	4,970
	ηs (Seasonal space heating efficiency)			138				
Prated at -10°C kW				8.5				
Qhe Annual energy consumption (GCV) GJ				18				
SCOP				3.52	3.53			

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETBH12E9W + EPRA08EW1	ETBH12E9W + EPRA10EW1	ETBH12E9W + EPRA12EW1		
Space heating 	Average climate water outlet 55°C	General	Seasonal space heating eff. class	A++				
			A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)	1.0			
			COPd	2.30				
			Pdh kW	7.6				
			PERd %	91.9				
			B Condition (2°CDB/-1°CWB)	Cdh (Degradation heating)	1.0			
			COPd	3.50				
			Pdh kW	4.6				
			PERd %	140.0				
			C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)	1.0			
			COPd	4.61				
			Pdh kW	3.0				
			PERd %	184.2				
			D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)	1.0			
			COPd	6.16				
			Pdh kW	3.7				
			PERd %	246.4				
			Tol (temperature operating limit)	COPd	2.01	2.05		
				Pdh kW	7.0	8.3		
				PERd %	80.2	82.1		
		TOL °C	-10					
		WTOL °C	55					
		Rated heat output supplementary capacity	Psup (at Tdesign -10°C) kW	1.5	0.0			
		Tbiv (bivalent temperature)	COPd	2.30	2.05			
			Pdh kW	7.6	8.3			
			PERd %	91.9	82.1			
			Tbiv °C	-7	-10			
Cold climate water outlet 55°C	General	Annual energy consumption	kWh	7,088	6,950	6,921		
		ηs (Seasonal space heating efficiency)	%	122	125			
		Prated at -22°C	kW	9.0				
		Qhe Annual energy consumption (GCV)	Gj	26	25			
		A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)	1.0				
			COPd	2.61				
			Pdh kW	5.2				
			PERd %	104.2	104.4			
			B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)	1.0			
			COPd	3.90				

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETBH12E9W + EPRA08EW1	ETBH12E9W + EPRA10EW1	ETBH12E9W + EPRA12EW1	
Space heating Cold climate water outlet 55°C	B Condition (2°CDB/1°CWB)	Pdh	kW		3.3		
		PERd	%		156.0		
		C Condition (7°CDB/6°CWB)		Cdh (Degradation heating)		1.0	
				COPd		4.96	
				Pdh	kW	3.4	
				PERd	%	198.3	
		D Condition (12°CDB/11°CWB)		COPd		6.56	
				Pdh	kW	4.2	
				PERd	%	262.5	
		Tol (temperature operating limit)		COPd		1.49	1.56
			Pdh	kW	4.9	6.1	7.2
			PERd	%	59.6	62.3	64.7
			TOL	°C		-22	
			WTOL	°C		55	
	G Condition (-15°CDB/)		COPd		2.00		2.03
			Pdh	kW	6.0		7.2
			PERd	%	80.0		81.2
	Tbiv (bivalent temperature)		COPd		2.25		2.03
			Pdh	kW	6.6		7.2
			PERd	%	90.0		81.2
		Tbiv	°C	-12		-15	
Rated heat output supplementary capacity		Psup (at Tdesign -22°C)	kW	4.1	2.9	1.8	
Warm climate water outlet 55°C	General	Annual energy consumption	kWh		2,972		
		ηs (Seasonal space heating efficiency)	%		170		
		Prated at 2°C	kW		9.6		
		Qhe Annual energy consumption (GCV)	Gj		11		
	B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)			1.0		
		COPd			2.66		
	C Condition (7°CDB/6°CWB)	Pdh	kW		8.0		
		PERd	%		106.5		
	D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)			1.0		
		COPd			3.79		
		Pdh	kW		6.7		
		PERd	%		151.5		
			Cdh (Degradation heating)		1.0		
			COPd		5.87		
		Pdh	kW	3.6			

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications					ETBH12E9W + EPRA08EW1	ETBH12E9W + EPRA10EW1	ETBH12E9W + EPRA12EW1
Space heating 	Warm climate water outlet 55°C	D Condition (12°CDB/11°CWB)	PERd	%	234.9		
		Tbiv (bivalent temperature)	COPd		3.13		
			Pdh	kW	8.4		
			PERd	%	125.4		
			Tbiv	°C	4		
	Average climate water outlet 35°C	General	Annual energy consumption	kWh	3,561	3,539	
			ηs (Seasonal space heating efficiency)	%	190	191	
			Prated at -10°C	kW	8.3		
			Qhe Annual energy consumption (GCV)	Gj	13		
			SCOP		4.81	4.84	
			Seasonal space heating eff. class		A+++		
		A Condition (-7°CDB/-8°CWB)	COPd		3.20		
			Pdh	kW	7.5		
			PERd	%	128.0		
		B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)		1.0		
		COPd		4.93			
		Pdh	kW	4.4			
		PERd	%	197.2			
	C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)		1.0			
		COPd		6.37			
	Pdh	kW	4.3				
	PERd	%	254.8				
D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0				
	COPd		8.13				
	Pdh	kW	6.6				
	PERd	%	325.2				
Tol (temperature operating limit)	COPd			2.90	2.86		
		Pdh	kW	6.9	8.1		
	PERd	%	116.0	114.4			
	TOL	°C	-10				
	WTOL	°C	35				
Tbiv (bivalent temperature)	COPd			3.20	2.86		
		Pdh	kW	7.5	8.1		
	PERd	%	128.0	114.4			
	Tbiv	°C	-7				
	Rated heat output supplementary capacity	Psup (at Tdesign -10°C)	kW	1.4	0.0		
Cold climate water outlet 35°C	General	Annual energy consumption	kWh	5,394	5,239	5,224	

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETBH12E9W + EPRA08EW1	ETBH12E9W + EPRA10EW1	ETBH12E9W + EPRA12EW1		
Space heating	Cold climate water outlet 35°C	General	η_s (Seasonal space heating efficiency)	162	166	167		
			Prated at -22°C		9.0			
			Qhe Annual energy consumption (GCV)		19			
			A Condition (7°CDB/4-8°CWB)	COPd		3.48		
				Pdh		5.4		
				PERd		139.2		
			B Condition (2°CDB/11°CWB)	Cdh (Degradation heating)		1.0		
				COPd		5.40		
				Pdh		3.6		
				PERd		216.0		
			C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)		1.0		
				COPd		6.53		
				Pdh		5.3		
				PERd		261.2		
			D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0		
				COPd		7.98		
				Pdh		6.6		
				PERd		319.0	319.2	
			Tol (temperature operating limit)	COPd		2.11	2.14	2.16
				Pdh		4.9	5.9	6.5
				PERd		84.3	85.6	86.4
				TOL		°C	-22	
				WTOL		°C	35	
				G Condition (-15°CDB/)	COPd		2.68	2.64
		Pdh		6.0	7.0			
		PERd		107.1	105.6			
	Tbiv (bivalent temperature)	COPd		2.95	2.64			
		Pdh		6.5	7.0			
		PERd		118.1	105.6			
		Tbiv		°C	-15			
	Rated heat output supplementary capacity	Psup (at Tdesign -22°C)		4.1	3.1	2.6		
Warm climate water outlet 35°C	General	Annual energy consumption	kWh		1,954			
		η_s (Seasonal space heating efficiency)	%		232			
		Prated at 2°C	kW		8.6			
		Qhe Annual energy consumption (GCV)	Gj		7			
		B Condition	Cdh (Degradation heating)		1.0			
			COPd		4.07			
			Pdh		7.7			
			PERd		162.9			
		C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)		1.0			
			COPd		5.85			
			Pdh		5.5			
			PERd		234.1			
Space heating	Warm climate water outlet 35°C	B Condition (2°CDB/11°CWB)	Cdh (Degradation heating)		1.0			
			COPd		4.97			
			Pdh		6.9			
			PERd		198.9			
			Tbiv		°C	5		
			D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0		
				COPd		7.85		
				Pdh		6.2		
				PERd		313.9		

 (1) Capacity according to standard EN14511 and valid for heated water range $dT = 3-8^\circ\text{C}$ at $T_a 7^\circ\text{C}$ |

 (2) Condition: $T_a \text{ DB/WB } 7^\circ\text{C}/6^\circ\text{C}$ - LWC 35°C ($DT = 5^\circ\text{C}$) |

(3) Power input is total input of indoor and outdoor units, including the circulation pump; according to EN14511 |

 (4) DB/WB $7^\circ\text{C}/6^\circ\text{C}$ - LWC 35°C ($dT = 5^\circ\text{C}$) with pump at full speed |


 Cooling: EW 12°C ; LW 7°C ; ambient conditions: 35°CDB |

 Cooling: EW 23°C ; LW 18°C ; ambient conditions: 35°CDB |

 Test at $T_a \text{ DB/WB } 7^\circ\text{C}/6^\circ\text{C}$. According to EN 16147.

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications					ETBX12E6V + EPRA08EW1	ETBX12E6V + EPRA10EW1	ETBX12E6V + EPRA12EW1		
Indoor unit					ETBX12EF6V				
Outdoor unit					EPRA08EAW1	EPRA10EAW1	EPRA12EAW1		
Heating capacity	Min.	kW			3.44 (1)				
	Nom.	kW			6.17 (2)				
	Max.	kW			7.95 (1)	9.25 (1)	9.97 (1)		
Cooling capacity	Nom.	kW			6.81 (3) / 6.47 (4)	7.97 (3) / 6.47 (4)	8.62 (3) / 6.47 (4)		
Power input	Heating	Min.	kW			0.70 (5)			
		Nom.	kW			1.21 (2)			
		Max.	kW			1.63 (5)	1.98 (5)	2.21 (5)	
	Cooling	Nom.	kW			2.08 (3) / 1.13 (4)	2.57 (3) / 1.13 (4)	2.86 (3) / 1.13 (4)	
COP					5.10 (2)				
EER					3.28 (3) / 5.75 (4)	3.10 (3) / 5.75 (4)	3.01 (3) / 5.75 (4)		
Pump	Type				Grundfos UPM3LK				
	Nominal ESP unit	Heating	kPa			63.0 (6)			
Water side Heat exchanger	Water flow rate	Heating	Nom.	l/min	18.3 (2)				
General	Supplier/ Manufacturer details	Name and address			Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium				
		Name or trademark			Daikin Europe N.V.				
	Product description	Air-to-water heat pump			Yes				
		Brine-to-water heat pump			No				
		Heat pump combination heater			No				
		Low-temperature heat pump			No				
		Supplementary heater integrated			Yes				
	LW(A) Sound power level (according to EN14825)	Indoor			dB(A)	44.0			
Outdoor			dB(A)	53.0					
Sound condition Ecodesign and energy label					Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825				
Space heating general	Air to water unit	Rated airflow (outdoor)			m ³ /h	3,542			
		Other	Capacity control				Inverter		
			Pck (Crankcase heater mode)			kW	0.000		
			Poff (Off mode)			kW	0.027		
			Psb (Standby mode)			kW	0.027		
	Pto (Thermostat off)			kW	0.024				
	Integrated supplementary heater	Psup			kW	6.0			
		Type of energy input				Electrical			
Space heating 	Average climate water outlet 55°C	General	Annual energy consumption	kWh	4,894	4,871			
			ηs (Seasonal space heating efficiency)	%	141				


2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETBX12E6V + EPRA08EW1	ETBX12E6V + EPRA10EW1	ETBX12E6V + EPRA12EW1		
Space heating	Average climate water outlet 55°C	General	Prated at -10°C	kW	8.5			
			Qhe Annual energy consumption (GCV)	Gj	18			
			SCOP		3.59	3.60		
			Seasonal space heating eff. class		A++			
			A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)		1.0		
				COPd		2.30		
				Pdh	kW	7.6		
				PERd	%	91.9		
			B Condition (2°CDB/-1°CWB)	Cdh (Degradation heating)		1.0		
				COPd		3.50		
				Pdh	kW	4.6		
			C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)		1.0		
				COPd		4.61		
				Pdh	kW	3.0		
			D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0		
				COPd		6.16		
				Pdh	kW	3.7		
			Tol (temperature operating limit)	PERd	%	246.4		
				COPd		2.01	2.05	
				Pdh	kW	7.0	8.3	
				PERd	%	80.2	82.1	
			Rated heat output supplementary capacity	TOL	°C	-10		
				WTOL	°C	55		
				Psup (at Tdesign -10°C)	kW	1.5	0.0	
Tbiv (bivalent temperature)	COPd			2.30	2.05			
	Pdh	kW		7.6	8.3			
	PERd	%		91.9	82.1			
	Tbiv	°C		-7	-10			
Cold climate water outlet 55°C	General	Annual energy consumption		kWh	7,028	6,890	6,861	
		ηs (Seasonal space heating efficiency)		%	123	126		
		Prated at -22°C		kW	9.0			
		Qhe Annual energy consumption (GCV)	Gj	25				
		A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)		1.0			
			COPd		2.61			
			Pdh	kW	5.2			

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETBX12E6V + EPRA08EW1	ETBX12E6V + EPRA10EW1	ETBX12E6V + EPRA12EW1		
Space heating 	Cold climate water outlet 55°C	A Condition (7°CDB/-8°CWB)	PERd	%	104.2			
		B Con- dition (2°CDB- B/1°CWB)	Cd _h (Degradation heating)			1.0		
			COP _d			3.90		
			Pd _h		kW	3.3		
			PER _d		%	156.0		
		C Con- dition (7°CDB- B/6°CWB)	Cd _h (Degradation heating)			1.0		
			COP _d			4.96		
			Pd _h		kW	3.4		
			PER _d		%	198.3		
		D Condition (12°CDB/11°CWB)	COP _d			6.56		
			Pd _h		kW	4.2		
			PER _d		%	262.5		
		Tol (tem- perature operat- ing limit)	COP _d			1.49	1.56	1.62
			Pd _h		kW	4.9	6.1	7.2
	PER _d		%	59.6	62.3	64.7		
	TOL		°C	-22				
	WTOL		°C	55				
	G Con- dition (-15°CDB/-)	COP _d			2.00	2.03		
		Pd _h		kW	6.0	7.2		
		PER _d		%	80.0	81.2		
	Tbiv (bivalent tempera- ture)	COP _d			2.25	2.03		
		Pd _h		kW	6.6	7.2		
		PER _d		%	90.0	81.2		
Tbiv		°C	-12					
Rated heat output supple- mentary capacity	P _{sup} (at T _{design} -22°C)		kW	4.1	2.9	1.8		
	Warm climate water outlet 55°C	General	Annual energy consumption	kWh	2,853			
η _s (Seasonal space heating efficiency)			%	177				
Prated at 2°C			kW	9.6				
Q _{he} Annual ener- gy consumption (GCV)			Gj	10				
B Con- dition (2°CDB- B/1°CWB)			Cd _h (Degradation heating)			1.0		
		COP _d			2.66			
		Pd _h		kW	8.0			
		PER _d		%	106.5			
		C Con- dition (7°CDB- B/6°CWB)	Cd _h (Degradation heating)			1.0		
COP _d				3.79				
Pd _h			kW	6.7				
PER _d		%	151.5					

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETBX12E6V + EPRA08EW1	ETBX12E6V + EPRA10EW1	ETBX12E6V + EPRA12EW1	
Space heating	Warm climate water outlet 55°C	D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0		
			COPd		5.87		
			Pdh kW		3.6		
				PERd %		234.9	
		Tbiv (bivalent temperature)	COPd		3.13		
			Pdh kW		8.4		
			PERd %		125.4		
			Tbiv °C		4		
		Average climate water outlet 35°C	General	Annual energy consumption kWh	3,462		3,440
				ηs (Seasonal space heating efficiency) %	195		196
	Prated at -10°C kW			8.3			
	Qhe Annual energy consumption (GCV) GJ			12			
	SCOP		4.95		4.98		
	Seasonal space heating eff. class			A+++			
A Condition (7°CDB/-8°CWB)	COPd			3.20			
	Pdh kW			7.5			
	PERd %		128.0				
B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)		1.0				
	COPd		4.93				
	Pdh kW		4.4				
	PERd %		197.2				
C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)		1.0				
	COPd		6.37				
	Pdh kW		4.3				
	PERd %		254.8				
D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0				
	COPd		8.13				
	Pdh kW		6.6				
	PERd %		325.2				
Tol (temperature operating limit)	COPd		2.90		2.86		
	Pdh kW		6.9		8.1		
	PERd %		116.0		114.4		
	TOL °C			-10			
	WTOL °C			35			
Tbiv (bivalent temperature)	COPd		3.20		2.86		
	Pdh kW		7.5		8.1		
	PERd %		128.0		114.4		

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETBX12E6V + EPRA08EW1	ETBX12E6V + EPRA10EW1	ETBX12E6V + EPRA12EW1
Space heating 	Average climate water outlet 35°C	Tbiv (bivalent temperature)	Tbiv °C		-7	-10
		Rated heat output supplementary capacity	Psup (at Tdesign -10°C)	kW	1.4	0.0
Cold climate water outlet 35°C	General	Annual energy consumption	kWh	5,334	5,180	5,165
		ηs (Seasonal space heating efficiency)	%	163	168	169
		Prated at -22°C	kW		9.0	
		Qhe Annual energy consumption (GCV)	Gj		19	
	A Condition (7°CDB/-8°CWB)	COPd			3.48	
		Pdh	kW		5.4	
		PERd	%		139.2	
	B Condition (2°CDB/-1°CWB)	Cdh (Degradation heating)			1.0	
		COPd			5.40	
		Pdh	kW		3.6	
		PERd	%		216.0	
	C Condition (7°CDB/-6°CWB)	Cdh (Degradation heating)			1.0	
		COPd			6.53	
		Pdh	kW		5.3	
		PERd	%		261.2	
	D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)			1.0	
		COPd			7.98	
	Pdh	kW		6.6		
	PERd	%	319.0		319.2	
Tol (temperature operating limit)		COPd		2.11	2.14	2.16
		Pdh	kW	4.9	5.9	6.5
		PERd	%	84.3	85.6	86.4
		TOL	°C		-22	
	WTOL	°C		35		
G Condition (-15°CDB/)		COPd		2.68		2.64
		Pdh	kW	6.0		7.0
		PERd	%	107.1		105.6
		Tbiv (bivalent temperature)	Tbiv °C			-15
Rated heat output supplementary capacity		Psup (at Tdesign -22°C)	kW	4.1	3.1	2.6
	Warm climate water outlet 35°C	General	Annual energy consumption	kWh	1,835	
		ηs (Seasonal space heating efficiency)	%		247	
		Prated at 2°C	kW		8.6	

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETBX12E6V + EPRA08EW1	ETBX12E6V + EPRA10EW1	ETBX12E6V + EPRA12EW1
Space heating	Warm climate water outlet 35°C	General	Qhe Annual energy consumption (GCV)	7	-	7
		B Condition (2°CDB- B/1°CWB)	Cdh (Degradation heating) COPd		1.0	
			Pdh kW		4.07	
			PERd %		7.7	
		C Condition (7°CDB- B/6°CWB)	Cdh (Degradation heating) COPd		162.9	
			Pdh kW		1.0	
			PERd %		5.85	
		Tbiv (bivalent temperature)	COPd		5.5	
			Pdh kW		234.1	
			PERd %		4.97	
			Tbiv °C		6.9	
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating) COPd		198.9	
			Pdh kW		5	
			PERd %		1.0	
					7.85	
					6.2	
					313.9	

(1)Capacity according to standard EN14511 and valid for heated water range dT = 3~8°C at Ta 7°C |

(2)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) |

(3)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB |

(4)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB |

(5)Power input is total input of indoor and outdoor units, including the circulation pump; according to EN14511 |



(6)DB/WB 7°C/6°C - LWC 35°C (dT=5°C) with pump at full speed |

Test at Ta DB/WB 7°C/6°C. According to EN 16147.

Technical specifications				ETBX12E9W + EPRA08EW1	ETBX12E9W + EPRA10EW1	ETBX12E9W + EPRA12EW1	
Indoor unit				ETBX12EF9W			
Outdoor unit				EPRA08EAW1	EPRA10EAW1	EPRA12EAW1	
Heating capacity	Min.		kW	3.44 (1)			
	Nom.		kW	6.17 (2)			
	Max.		kW	7.95 (1)	9.25 (1)	9.97 (1)	
Cooling capacity	Nom.		kW	6.81 (3) / 6.47 (4)		7.97 (3) / 6.47 (4)	
Power input	Heating	Min.	kW	0.70 (5)			
		Nom.	kW	1.21 (2)			
		Max.	kW	1.63 (5)	1.98 (5)	2.21 (5)	
	Cooling	Nom.	kW	2.08 (3) / 1.13 (4)		2.57 (3) / 1.13 (4)	
COP				5.10 (2)			
EER				3.28 (3) / 5.75 (4)		3.10 (3) / 5.75 (4)	
Pump	Type			Grundfos UPM3LK			
	Nominal ESP unit	Heating	kPa	63.0 (6)			
Water side Heat exchanger	Water flow rate	Heating	Nom.	l/min			
General	Supplier/Manufacturer details	Name and address		Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium			
		Name or trademark		Daikin Europe N.V.			
	Product description	Air-to-water heat pump			Yes		
		Brine-to-water heat pump			No		
		Heat pump combination heater			No		
		Low-temperature heat pump			No		
		Supplementary heater integrated			Yes		
		Water-to-water heat pump			No		
LW(A) Sound power level (according to EN14825)	Indoor		dB(A)	44.0			
LW(A) Sound power level (according to EN14825)	Outdoor		dB(A)	53.0			
Sound condition Ecodesign and energy label				Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825			

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETBX12E9W + EPRA08EW1	ETBX12E9W + EPRA10EW1	ETBX12E9W + EPRA12EW1	
Space heating general	Air to water unit	Rated airflow (outdoor)	m ³ /h	3,542			
	Other	Capacity control		Inverter			
		Pck (Crankcase heater mode)	kW	0.000			
		Poff (Off mode)	kW	0.027			
		Psb (Standby mode)	kW	0.027			
		Pto (Thermostat off)	kW	0.024			
	Integrated supplementary heater	Psup	kW	9.0			
Type of energy input		Electrical					
Space heating 	Average climate water outlet 55°C	General	Annual energy consumption	kWh	4,894	4,871	
			ηs (Seasonal space heating efficiency)	%	141		
Space heating 	Average climate water outlet 55°C	General	Prated at -10°C	kW	8.5		
			Qhe Annual energy consumption (GCV)	Gj	18		
		SCOP		3.59		3.60	
		Seasonal space heating eff. class		A++			
		A Condition (-7°CDB/-8°CWB)	CdH (Degradation heating)		1.0		
			COPd		2.30		
			PdH	kW	7.6		
			PERd	%	91.9		
		B Condition (2°CDB/-1°CWB)	CdH (Degradation heating)		1.0		
			COPd		3.50		
			PdH	kW	4.6		
			PERd	%	140.0		
		C Condition (7°CDB/6°CWB)	CdH (Degradation heating)		1.0		
			COPd		4.61		
			PdH	kW	3.0		
			PERd	%	184.2		
		D Condition (12°CDB/11°CWB)	CdH (Degradation heating)		1.0		
			COPd		6.16		
			PdH	kW	3.7		
			PERd	%	246.4		
Tol (temperature operating limit)	COPd		2.01		2.05		
	PdH		7.0		8.3		
	PERd		80.2		82.1		
Rated heat output supplementary capacity	TOL		-10 °C				
	WTOL		55 °C				
Rated heat output supplementary capacity	Psup (at Tdesign -10°C)	kW		1.5		0.0	
		Tbiv (bivalent temperature)	COPd		2.30		2.05
			PdH		7.6		8.3
			PERd		91.9		82.1
			Tbiv		-7		-10
			°C				
Cold climate water outlet 55°C	General	Annual energy consumption	kWh	7,028	6,890	6,861	
		ηs (Seasonal space heating efficiency)	%	123		126	
		Prated at -22°C	kW	9.0			
		Qhe Annual energy consumption (GCV)	Gj	25			
		A Condition (-7°CDB/-8°CWB)	CdH (Degradation heating)		1.0		
			COPd		2.61		
			PdH		5.2		

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETBX12E9W + EPRA08EW1	ETBX12E9W + EPRA10EW1	ETBX12E9W + EPRA12EW1
Space heating Cold climate water outlet 55°C	A Condition (7°CDB/-8°CWB)	PERd	%	104.2		104.4
	B Condition (2°CDB- B/1°CWB)	Cd _h (Degradation heating)		1.0		
		COP _d		3.90		
		Pd _h kW		3.3		
		PER _d %		156.0		
	C Condition (7°CDB- B/6°CWB)	Cd _h (Degradation heating)		1.0		
		COP _d		4.96		
		Pd _h kW		3.4		
		PER _d %		198.3		
	D Condition (12°CDB/11°CWB)	COP _d		6.56		
		Pd _h kW		4.2		
		PER _d %		262.5		
	Tol (temperature operating limit)	COP _d		1.49	1.56	1.62
		Pd _h kW		4.9	6.1	7.2
		PER _d %		59.6	62.3	64.7
		TOL °C		-22		
		WTOL °C		55		
	G Condition (-15°CDB/-)	COP _d		2.00	2.03	
		Pd _h kW		6.0	7.2	
		PER _d %		80.0	81.2	
	Tbiv (bivalent temperature)	COP _d		2.25	2.03	
		Pd _h kW		6.6	7.2	
		PER _d %		90.0	81.2	
Rated heat output supplementary capacity	Tbiv °C		-12			
	P _{sup} (at T _{design} -22°C) kW		4.1	2.9	1.8	
Warm climate water outlet 55°C	General	Annual energy consumption kWh		2,853		
		η _s (Seasonal space heating efficiency) %		177		
		Prated at 2°C kW		9.6		
		Q _{he} Annual energy consumption (GCV) GJ		10		
	B Condition (2°CDB- B/1°CWB)	Cd _h (Degradation heating)		1.0		
		COP _d		2.66		
		Pd _h kW		8.0		
	C Condition (7°CDB- B/6°CWB)	PER _d %		106.5		
		Cd _h (Degradation heating)		1.0		
COP _d		3.79				
	Pd _h kW		6.7			
	PER _d %		151.5			

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETBX12E9W + EPRA08EW1	ETBX12E9W + EPRA10EW1	ETBX12E9W + EPRA12EW1
Space heating	Warm climate water outlet 55°C	D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0	
			COPd		5.87	
			Pdh kW		3.6	
			PERd %		234.9	
	(bivalent temperature)	Tbiv	COPd		3.13	
			Pdh kW		8.4	
			PERd %		125.4	
			Tbiv °C		4	
Average climate water outlet 35°C	General		Annual energy consumption kWh	3,462		3,440
			ηs (Seasonal space heating efficiency) %	195		196
			Prated at -10°C kW		8.3	
			Qhe Annual energy consumption (GCV) GJ		12	
			SCOP	4.95		4.98
			Seasonal space heating eff. class		A+++	
	A Condition (-7°CDB/-8°CWB)		COPd		3.20	
			Pdh kW		7.5	
			PERd %		128.0	
			Cdh (Degradation heating)		1.0	
	B Condition (2°CDB/1°CWB)		COPd		4.93	
			Pdh kW		4.4	
			PERd %		197.2	
			Cdh (Degradation heating)		1.0	
	C Condition (7°CDB/6°CWB)		COPd		6.37	
			Pdh kW		4.3	
			PERd %		254.8	
			Cdh (Degradation heating)		1.0	
	D Condition (12°CDB/11°CWB)		COPd		8.13	
			Pdh kW		6.6	
			PERd %		325.2	
			COPd	2.90		2.86
Tol (temperature operating limit)			Pdh kW	6.9		8.1
			PERd %	116.0		114.4
			TOL °C		-10	
			WTOL °C		35	
Tbiv (bivalent temperature)			COPd	3.20		2.86
			Pdh kW	7.5		8.1
			PERd %	128.0		114.4

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETBX12E9W + EPRA08EW1	ETBX12E9W + EPRA10EW1	ETBX12E9W + EPRA12EW1
Space heating	Average climate water outlet 35°C	Tbiv (bivalent temperature)	Tbiv °C	-7		-10
		Rated heat output supplementary capacity	Psup (at Tdesign -10°C) kW	1.4	0.0	
Cold climate water outlet 35°C	General	Annual energy consumption	kWh	5,334	5,180	5,165
		ηs (Seasonal space heating efficiency)	%	163	168	169
	Prated at -22°C	kW	9.0			
	Qhe Annual energy consumption (GCV)	Gj	19			
	A Condition (7°CDB/-8°CWB)	COPd		3.48		
		Pdh	kW	5.4		
		PERd	%	139.2		
	B Condition (2°CDB/-1°CWB)	Cdh (Degradation heating)		1.0		
		COPd		5.40		
		Pdh	kW	3.6		
	C Condition (7°CDB/-6°CWB)	Cdh (Degradation heating)		1.0		
		COPd		6.53		
		Pdh	kW	5.3		
	D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0		
COPd			7.98			
Pdh		kW	6.6			
Tol (temperature operating limit)	PERd	%	319.0	319.2		
	COPd		2.11	2.14	2.16	
	Pdh	kW	4.9	5.9	6.5	
G Condition (-15°CDB/)	PERd	%	84.3	85.6	86.4	
	TOL	°C	-22			
	WTOL	°C	35			
Tbiv (bivalent temperature)	COPd		2.68	2.64		
	Pdh	kW	6.0	7.0		
	PERd	%	107.1	105.6		
Rated heat output supplementary capacity	Tbiv	°C	2.95	2.64		
	Pdh	kW	6.5	7.0		
Warm climate water outlet 35°C	General	PERd	%	118.1	105.6	
		Tbiv	°C	-12	-15	
	Rated heat output supplementary capacity	Psup (at Tdesign -22°C) kW		4.1	3.1	2.6
		Annual energy consumption	kWh	1,835		
		ηs (Seasonal space heating efficiency)	%	247		
		Prated at 2°C	kW	8.6		

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETBX12E9W + EPRA08EW1	ETBX12E9W + EPRA10EW1	ETBX12E9W + EPRA12EW1	
Space heating 	Warm climate water outlet 35°C	General	Qhe Annual energy consumption (GCV)	7	-	7	
		B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)			1.0	
			COPd			4.07	
			Pdh kW			7.7	
		C Condition (7°CDB/6°CWB)	PERd %			162.9	
			Cdh (Degradation heating)			1.0	
			COPd			5.85	
		Tbiv (bivalent temperature)	Pdh kW			5.5	
			PERd %			234.1	
			Tbiv °C			4.97	
		D Condition (12°CDB/11°CWB)	Pdh kW			6.9	
			PERd %			198.9	
			Tbiv °C			5	
			Cdh (Degradation heating)			1.0	
COPd				7.85			
Pdh kW				6.2			
		PERd %		313.9			

(1)Capacity according to standard EN14511 and valid for heated water range dT = 3~8°C at Ta 7°C |

(2)Condition: Ta DB/WB 7°C/6°C - LWC 35°C. (DT = 5°C) |

(3)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB |

(4)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB |

(5)Power input is total input of indoor and outdoor units, including the circulation pump; according to EN14511 |

(6)DB/WB 7°C/6°C - LWC 35°C (dT=5°C) with pump at full speed |

Test at Ta DB/WB 7°C/6°C. According to EN 16147.

Technical specifications				ETVH12S18E6V + EPRA08EW1	ETVH12S23E6V + EPRA08EW1	ETVH12S18E6V + EPRA10EW1	ETVH12S23E6V + EPRA10EW1	ETVH12S18E6V + EPRA12EW1	ETVH12S23E6V + EPRA12EW1	
Indoor unit				ETVH12S18EA6V	ETVH12S23EA6V	ETVH12S18EA6V	ETVH12S23EA6V	ETVH12S18EA6V	ETVH12S23EA6V	
Outdoor unit				EPRA08EAW1		EPRA10EAW1		EPRA12EAW1		
Heating capacity	Min.		kW	3.44 (1)						
	Nom.		kW	6.17 (2)						
	Max.		kW	7.95 (1)		9.25 (1)		9.97 (1)		
Power input	Heating	Min.	kW	0.70 (3)						
		Nom.	kW	1.21 (2)						
		Max.	kW	1.63 (3)		1.98 (3)		2.21 (3)		
	Domestic hot water from 10°C to 50°C	Nom.	kWh	2.54 (4)	3.09 (4)	2.54 (4)	3.09 (4)	2.54 (4)	3.09 (4)	
Heat up time from 10°C to 50°C			hr	1h 51min	2h 10min	1h 51min	2h 10min	1h 51min	2h 10min	
COP				5.10 (2)						
Pump	Type	Grundfos UPM3LK								
	Nominal Heating ESP unit		kPa	59.8 (5)						
Water side Heat exchanger	Water flow rate	Heating Nom.	l/min	18.3 (2)						
General	Supplier/Manufacturer details	Name and address		Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium						
		Name or trademark		Daikin Europe N.V.						
	Product description	Air-to-water heat pump			Yes					
		Brine-to-water heat pump			No					
		Heat pump combination heater			Yes					
		Low-temperature heat pump			No					
		Supplementary heater integrated			Yes					
		Water-to-water heat pump			No					
LW(A) Sound power level (according to EN14825)	Indoor		dB(A)	44.0						
LW(A) Sound power level (according to EN14825)	Outdoor		dB(A)	53.0						
Sound condition Ecodesign and energy label				Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825						
Tank	Name			Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	

2 Specifications



1 - 1 EPRA08-12EW

2

Technical specifications				ETVH12S18E6V + EPRA08EW1	ETVH12S23E6V + EPRA08EW1	ETVH12S18E6V + EPRA10EW1	ETVH12S23E6V + EPRA10EW1	ETVH12S18E6V + EPRA12EW1	ETVH12S23E6V + EPRA12EW1	
Space heating general	Air to water unit	Rated airflow (outdoor)	m ³ /h	3,542						
		Other	Capacity control	Inverter						
		Pck (Crankcase heater mode)	kW	0.000						
		Poff (Off mode)	kW	0.027						
		Psb (Standby mode)	kW	0.027						
		Pto (Thermostat off)	kW	0.024						
Domestic hot water heating	General	Declared load profile		L						
Space heating general	Inte- grated supple- mentary heater	Psup	kW	6.0						
		Type of energy input		Electrical						
Domestic hot water heating	Average climate	AEC (Annual electricity consumption)	kWh	851	787	851	787	851	787	
Domestic hot water heating	Average climate	COPdhw		2.80	3.05	2.80	3.05	2.80	3.05	
		Heat up time		1h 57min	2h 14min	1h 57min	2h 14min	1h 57min	2h 14min	
		η _{wh} (water heating effi- ciency)	%	120	130	120	130	120	130	
		Qelec (Daily electricity consumption)	kWh	4.160	3.830	4.160	3.830	4.160	3.830	
		Reference hot water tem- perature	°C	53.0	52.0	53.0	52.0	53.0	52.0	
		Stand-by power input	W	50.7	43.9	50.7	43.9	50.7	43.9	
		Water heating energy efficiency class		A+						
		Cold climate	AEC (Annual electricity consumption)	kWh	937	866	937	866	937	866
			COPdhw		2.55	2.77	2.55	2.77	2.55	2.77
			Heat up time		1h 55min	2h 02min	1h 55min	2h 02min	1h 55min	2h 02min
η _{wh} (water heating effi- ciency)	%		109	118	109	118	109	118		
Qelec (Daily electricity consumption)	kWh		4.570	4.200	4.570	4.200	4.570	4.200		
Reference hot water tem- perature	°C		53.0	52.0	53.0	52.0	53.0	52.0		
Warm climate	AEC (Annual electricity consumption)	kWh	699	648	699	648	699	648		
	COPdhw		3.40	3.68	3.40	3.68	3.40	3.68		
	Heat up time		1h 54min	2h 06min	1h 54min	2h 06min	1h 54min	2h 06min		
	η _{wh} (water heating effi- ciency)	%	147	158	147	158	147	158		
	Qelec (Daily electricity consumption)	kWh	3.430	3.160	3.430	3.160	3.430	3.160		
	Reference hot water tem- perature	°C	53.0	52.0	53.0	52.0	53.0	52.0		
	Stand-by power input	W	44.6	39.0	44.6	39.0	44.6	39.0		

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVH12S18E6V + EPRA08EW1	ETVH12S23E6V + EPRA08EW1	ETVH12S18E6V + EPRA10EW1	ETVH12S23E6V + EPRA10EW1	ETVH12S18E6V + EPRA12EW1	ETVH12S23E6V + EPRA12EW1							
Space heating 	Average climate water outlet 55°C	General	Annual energy consumption	kWh	4,993		4,970									
			ηs (Seasonal space heating efficiency)	%	138											
			Prated at -10°C	kW	8.5											
			Qhe Annual energy consumption (GCV)	Gj	18											
			SCOP		3.52		3.53									
			Seasonal space heating eff. class		A++											
			A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)		1.0										
				COPd		2.30										
				Pdh	kW	7.6										
				PERd	%	91.9										
			B Condition (2°CDB/-B/1°CWB)	Cdh (Degradation heating)		1.0										
				COPd		3.50										
				Pdh	kW	4.6										
			C Condition (7°CDB/6°CWB)	PERd	%	140.0										
				Cdh (Degradation heating)		1.0										
				COPd		4.61										
			Space heating 	Average climate water outlet 55°C	C Condition (7°CDB/-B/6°CWB)	Pdh	kW	3.0								
PERd	%	184.2														
D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)					1.0										
	COPd					6.16										
	Pdh	kW				3.7										
	PERd	%				246.4										
Tol (temperature operating limit)	COPd					2.01		2.05								
	Pdh	kW				7.0										
	PERd	%				80.2		82.1								
	TOL	°C				-10										
Rated heat output supplementary capacity	WTOL	°C						55								
								Psup (at Tdesign -10°C)	kW	1.5		0.0				
								Tbiv (bivalent temperature)	°C				2.30		2.05	
													Pdh	kW	7.6	
								PERd	%				91.9		82.1	
													Tbiv	°C	-7	
			Cold climate water outlet 55°C	General	Annual energy consumption			kWh	7,088		6,950		6,921			
					ηs (Seasonal space heating efficiency)			%	122							
					Prated at -22°C			kW	9.0							
Qhe Annual energy consumption (GCV)	Gj	26			25											
A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)				1.0											
	COPd				2.61											
	Pdh	kW			5.2											
	PERd	%			104.2		104.4									
B Condition (2°CDB/-B/1°CWB)	Cdh (Degradation heating)				1.0											
	COPd				3.90											
	Pdh	kW			3.3											
C Condition (7°CDB/-B/6°CWB)	PERd	%			156.0											
	Cdh (Degradation heating)				1.0											
	COPd				4.96											
D Condition (12°CDB/11°CWB)	Pdh	kW			3.4											
	PERd	%			198.3											
	COPd				6.56											
	Pdh	kW	4.2													
Tol (temperature operating limit)	°C				262.5											
					COPd		1.49		1.56							
					Pdh	kW	4.9		6.1							
						1.62		7.2								

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications					ETVH12S18E6V + EPRA08EW1	ETVH12S23E6V + EPRA08EW1	ETVH12S18E6V + EPRA10EW1	ETVH12S23E6V + EPRA10EW1	ETVH12S18E6V + EPRA12EW1	ETVH12S23E6V + EPRA12EW1
Space heating Cold climate water outlet 55°C	Tol (temperature operating limit)	PERd	%		59.6		62.3		64.7	
		TOL	°C				-22			
		WTOL	°C				55			
	G Condition (-15°CDB/-)	COPd			2.00				2.03	
		Pdh	kW		6.0				7.2	
		PERd	%		80.0				81.2	
	Tbiv (bivalent temperature)	COPd			2.25				2.03	
		Pdh	kW		6.6				7.2	
		PERd	%		90.0				81.2	
	Rated heat output supplementary capacity	Tbiv	°C		-12				-15	
Psup (at Tdesign -22°C)		kW		4.1		2.9		1.8		
Warm climate water outlet 55°C	General	Annual energy consumption	kWh				2,972			
		ηs (Seasonal space heating efficiency)	%				170			
		Prated at 2°C	kW				9.6			
		Qhe Annual energy consumption (GCV)	Gj				11			
		Cdh (Degradation heating)					1.0			
	B Condition (2°CDB/1°CWB)	COPd					2.66			
		Pdh	kW				8.0			
		PERd	%				106.5			
	C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)					1.0			
		COPd					3.79			
		Pdh	kW				6.7			
	D Condition (12°CDB/11°CWB)	PERd	%				151.5			
		Cdh (Degradation heating)					1.0			
		COPd					5.87			
	Tbiv (bivalent temperature)	Pdh	kW				3.6			
PERd		%				234.9				
COPd						3.13				
Average climate water outlet 35°C	General	Pdh	kW				8.4			
		PERd	%				125.4			
		Tbiv	°C				4			
		Annual energy consumption	kWh		3,561				3,539	
		ηs (Seasonal space heating efficiency)	%		190				191	
Average climate water outlet 35°C	General	Prated at -10°C	kW				8.3			
		Qhe Annual energy consumption (GCV)	Gj				13			
		SCOP			4.81				4.84	
		Seasonal space heating eff. class					A+++			

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVH12S18E6V + EPRA08EW1	ETVH12S23E6V + EPRA08EW1	ETVH12S18E6V + EPRA10EW1	ETVH12S23E6V + EPRA10EW1	ETVH12S18E6V + EPRA12EW1	ETVH12S23E6V + EPRA12EW1		
Space heating 	Average climate water outlet 35°C	A Condition (7°CDB/-8°CWB)	COPd						3.20		
			Pdh	kW					7.5		
			PERd	%						128.0	
		B Con- dition (2°CDB/- B/1°CWB)	CdH (Degradation heating)							1.0	
			COPd							4.93	
			Pdh	kW						4.4	
		C Con- dition (7°CDB- B/6°CWB)	CdH (Degradation heating)							197.2	
			COPd							1.0	
			Pdh	kW						6.37	
		D Condition (12°CDB/11°CWB)	CdH (Degradation heating)							4.3	
			COPd							254.8	
			Pdh	kW						1.0	
	Tol (tem- perature operat- ing limit)	COPd			2.90				2.86		
		Pdh		kW	6.9				8.1		
		PERd		%	116.0				114.4		
		TOL		°C					-10		
		WTOL		°C					35		
		Tbiv		COPd		3.20			2.86		
	Cold climate water outlet 35°C	General	Annual energy consumption		kWh	5,394		5,239		5,224	
			ηs (Seasonal space heating efficiency)		%	162		166		167	
			Prated at -22°C		kW				9.0		
			Qhe Annual energy consumption (GCV)		Gj				19		
	A Condition (7°CDB/-8°CWB)	COPd							3.48		
		Pdh		kW					5.4		
PERd		%					139.2				
B Con- dition (2°CDB- B/1°CWB)	CdH (Degradation heating)							1.0			
	COPd							5.40			
	Pdh		kW					3.6			
C Con- dition (7°CDB- B/6°CWB)	PERd		%					216.0			
	CdH (Degradation heating)							1.0			

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETVH12S18E6V + EPRA08EW1	ETVH12S23E6V + EPRA08EW1	ETVH12S18E6V + EPRA10EW1	ETVH12S23E6V + EPRA10EW1	ETVH12S18E6V + EPRA12EW1	ETVH12S23E6V + EPRA12EW1		
Space heating Cold climate water outlet 35°C	C Condition (7°CDB- B/6°CWB)	COPd							6.53		
		Pdh	kW						5.3		
		PERd	%						261.2		
		D Condition (12°CDB/11°CWB)	CdH (Degradation heating)							1.0	
			COPd							7.98	
			Pdh	kW						6.6	
		Tol (temperature operating limit)	PERd	PERd	%	319.0				319.2	
				COPd		2.11			2.14		2.16
				Pdh	kW	4.9			5.9		6.5
				PERd	%	84.3			85.6		86.4
	TOL			°C				-22			
	G Condition (-15°CDB/-)	PERd	PERd	%	107.1					105.6	
			COPd		2.68					2.64	
			Pdh	kW	6.0					7.0	
	Tbiv (bivalent temperature)	Tbiv	Tbiv	°C	-12					-15	
			COPd		2.95					2.64	
			Pdh	kW	6.5					7.0	
			PERd	%	118.1					105.6	
	Rated heat output supplementary capacity	Psup (at Tdesign -22°C)	Psup	kW	4.1			3.1		2.6	
			General	Annual energy consumption	kWh						1,954
Warm climate water outlet 35°C	B Condition (2°CDB- B/1°CWB)	ηs (Seasonal space heating efficiency)	%						232		
		Prated at 2°C	kW						8.6		
		Qhe Annual energy consumption (GCV)	Gj						7		
		CdH (Degradation heating)							1.0		
	C Condition (7°CDB- B/6°CWB)	PERd	PERd	%						162.9	
			COPd							5.85	
			Pdh	kW						5.5	
	D Condition (12°CDB/11°CWB)	Tbiv (bivalent temperature)	Tbiv	°C						234.1	
			COPd							4.97	
			Pdh	kW						6.9	
PERd			%						198.9		
Space heating Warm climate water	D Condition (12°CDB/11°CWB)	PERd	CdH (Degradation heating)	CdH					1.0		
				COPd						7.85	
				Pdh	kW				6.2		
				PERd	%				313.9		

(1)Capacity according to standard EN14511 and valid for heated water range dT = 3~8°C at Ta 7°C |
 (2)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) |
 (3)Power input is total input of indoor and outdoor units, including the circulation pump; according to EN14511 |
 (4)Test at Ta DB/WB 7°C/6°C. According to EN 16147. |
 (5)DB/WB 7°C/6°C - LWC 35°C (dT=5°C) with pump at full speed |
 Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB |
 Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB

Technical specifications				ETVH12S18E9W + EPRA08EW1	ETVH12S23E9W + EPRA08EW1	ETVH12S18E9W + EPRA10EW1	ETVH12S23E9W + EPRA10EW1	ETVH12S18E9W + EPRA12EW1	ETVH12S23E9W + EPRA12EW1
Indoor unit				ETVH12S18EA9W	ETVH12S23EA9W	ETVH12S18EA9W	ETVH12S23EA9W	ETVH12S18EA9W	ETVH12S23EA9W
Outdoor unit				EPRA08EAW1		EPRA10EAW1		EPRA12EAW1	
Heating capacity	Min.		kW			3.44 (1)			
	Nom.		kW			6.17 (2)			
	Max.		kW	7.95 (1)		9.25 (1)		9.97 (1)	

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVH12S18E9W + EPRA08EW1	ETVH12S23E9W + EPRA08EW1	ETVH12S18E9W + EPRA10EW1	ETVH12S23E9W + EPRA10EW1	ETVH12S18E9W + EPRA12EW1	ETVH12S23E9W + EPRA12EW1	
Power input	Heating	Min.	kW	0.70 (3)						
		Nom.	kW	1.21 (2)						
		Max.	kW	1.63 (3)		1.98 (3)		2.21 (3)		
	Domestic hot water from 10°C to 50°C	Nom.	kWh	2.54 (4)	3.09 (4)	2.54 (4)	3.09 (4)	2.54 (4)	3.09 (4)	
Heat up time from 10°C to 50°C			hr	1h 51min	2h 10min	1h 51min	2h 10min	1h 51min	2h 10min	
COP				5.10 (2)						
Pump	Type	Grundfos UPM3LK								
	Nominal ESP unit	Heating	kPa	59.8 (5)						
Water side Heat exchanger	Water flow rate	Heating Nom.	l/min	18.3 (2)						
General	Supplier/Manufacturer details	Name and address	Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium							
		Name or trademark	Daikin Europe N.V.							
	Product description	Air-to-water heat pump	Yes							
		Brine-to-water heat pump	No							
		Heat pump combination heater	Yes							
		Low-temperature heat pump	No							
		Supplementary heater integrated	Yes							
Water-to-water heat pump	No									
LW(A) Sound power level (according to EN14825)	Indoor	dB(A)	44.0							
LW(A) Sound power level (according to EN14825)	Outdoor	dB(A)	53.0							
Sound condition Ecodesign and energy label				Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825						
Tank	Name			Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	
Space heating general	Air to water unit	Rated airflow (outdoor)	m ³ /h	3,542						
		Other	Capacity control	Inverter						
		Pck (Crankcase heater mode)	kW	0.000						
		Poff (Off mode)	kW	0.027						
		Psb (Standby mode)	kW	0.027						
		Pto (Thermostat off)	kW	0.024						
Domestic hot water heating	General	Declared load profile	L							
Space heating general	Integrated supplementary heater	Psup	kW	9.0						
		Type of energy input	Electrical							
Domestic hot water heating	Average climate	AEC (Annual electricity consumption)	kWh	851	787	851	787	851	787	

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications			ETVH12S18E9W + EPRA08EW1	ETVH12S23E9W + EPRA08EW1	ETVH12S18E9W + EPRA10EW1	ETVH12S23E9W + EPRA10EW1	ETVH12S18E9W + EPRA12EW1	ETVH12S23E9W + EPRA12EW1	
Domestic hot water heating	Average climate	COPdhw	2.80	3.05	2.80	3.05	2.80	3.05	
		Heat up time	1h 57min	2h 14min	1h 57min	2h 14min	1h 57min	2h 14min	
		η _{wh} (water heating efficiency) %	120	130	120	130	120	130	
		Qelec (Daily electricity consumption) kWh	4.160	3.830	4.160	3.830	4.160	3.830	
		Reference hot water temperature °C	53.0	52.0	53.0	52.0	53.0	52.0	
		Stand-by power input W	50.7	43.9	50.7	43.9	50.7	43.9	
		Water heating energy efficiency class	A+						
	Cold climate	AEC (Annual electricity consumption) kWh	937	866	937	866	937	866	
		COPdhw	2.55	2.77	2.55	2.77	2.55	2.77	
		Heat up time	1h 55min	2h 02min	1h 55min	2h 02min	1h 55min	2h 02min	
		η _{wh} (water heating efficiency) %	109	118	109	118	109	118	
		Qelec (Daily electricity consumption) kWh	4.570	4.200	4.570	4.200	4.570	4.200	
		Reference hot water temperature °C	53.0	52.0	53.0	52.0	53.0	52.0	
		Stand-by power input W	54.3	46.7	54.3	46.7	54.3	46.7	
Warm climate	AEC (Annual electricity consumption) kWh	699	648	699	648	699	648		
	COPdhw	3.40	3.68	3.40	3.68	3.40	3.68		
	Heat up time	1h 54min	2h 06min	1h 54min	2h 06min	1h 54min	2h 06min		
	η _{wh} (water heating efficiency) %	147	158	147	158	147	158		
	Qelec (Daily electricity consumption) kWh	3.430	3.160	3.430	3.160	3.430	3.160		
	Reference hot water temperature °C	53.0	52.0	53.0	52.0	53.0	52.0		
	Stand-by power input W	44.6	39.0	44.6	39.0	44.6	39.0		
Space heating	Average climate water outlet 55°C	General Annual energy consumption kWh	4,993		4,970				
		η _s (Seasonal space heating efficiency) %	138						
		Prated at -10°C kW	8.5						
		Qhe Annual energy consumption (GCV) GJ	18						
		SCOP	3.52		3.53				
		Seasonal space heating eff. class	A++						
		A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)	1.0					
			COPd	2.30					
			Pdh kW	7.6					
			PERd %	91.9					
		B Condition (2°CDB/-1°CWB)	Cdh (Degradation heating)	1.0					
			COPd	3.50					
			Pdh kW	4.6					
	PERd %	140.0							
C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)	1.0							
	COPd	4.61							

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVH12S18E9W + EPRA08EW1	ETVH12S23E9W + EPRA08EW1	ETVH12S18E9W + EPRA10EW1	ETVH12S23E9W + EPRA10EW1	ETVH12S18E9W + EPRA12EW1	ETVH12S23E9W + EPRA12EW1			
Space heating 	Average climate water outlet 55°C	C Condition (7°CDB/6°CWB)	Pdh	kW						3.0		
			PERd	%						184.2		
		D Condition (12°CDB/11°CWB)	Cd _h (Degradation heating)									1.0
			COP _d								6.16	
			Pdh	kW								3.7
			PERd	%								246.4
		Tol (temperature operating limit)	COP _d				2.01				2.05	
			Pdh	kW				7.0				8.3
			PERd	%				80.2				82.1
			TOL	°C								-10
			WTOL	°C								55
		Rated heat output supplementary capacity	P _{sup} (at T _{design} -10°C)	kW		1.5			0.0			
				T _{biv}	COP _d	2.30			2.05			
				Pdh	kW	7.6			8.3			
				PERd	%	91.9			82.1			
				T _{biv}	°C	-7			-10			
		Cold climate water outlet 55°C	General	Annual energy consumption		7,088		6,950		6,921		
				η _s (Seasonal space heating efficiency)	%	122		125				
Prated at -22°C	kW			9.0								
Q _{he} Annual energy consumption (GCV)	Gj			26		25						
A Condition (7°CDB/8°CWB)	Cd _h (Degradation heating)										1.0	
	COP _d										2.61	
	Pdh		kW								5.2	
	PERd		%	104.2					104.4			
B Condition (2°CDB/1°CWB)	Cd _h (Degradation heating)									1.0		
	COP _d									3.90		
	Pdh		kW								3.3	
	PERd		%								156.0	
C Condition (7°CDB/6°CWB)	Cd _h (Degradation heating)									1.0		
	COP _d								4.96			
	Pdh	kW								3.4		
	PERd	%								198.3		
D Condition (12°CDB/11°CWB)	Cd _h (Degradation heating)									6.56		
	COP _d								4.2			
	Pdh	kW								262.5		
	PERd	%								262.5		
Tol (temperature operating limit)	COP _d				1.49			1.56	1.62			
	Pdh	kW				4.9			6.1	7.2		

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications					ETVH12S18E9W + EPRA08EW1	ETVH12S23E9W + EPRA08EW1	ETVH12S18E9W + EPRA10EW1	ETVH12S23E9W + EPRA10EW1	ETVH12S18E9W + EPRA12EW1	ETVH12S23E9W + EPRA12EW1	
Space heating Cold climate water outlet 55°C	Tol (temperature operating limit)	PERd	%		59.6		62.3		64.7		
		TOL	°C				-22				
		WTOL	°C				55				
	G Condition (-15°CDB/-)	COPd			2.00				2.03		
		Pdh	kW		6.0				7.2		
		PERd	%		80.0				81.2		
	Tbiv (bivalent temperature)	COPd			2.25				2.03		
		Pdh	kW		6.6				7.2		
		PERd	%		90.0				81.2		
	Rated heat output supplementary capacity	Tbiv	°C		-12				-15		
		Psup (at Tdesign -22°C)	kW		4.1		2.9		1.8		
	Warm climate water outlet 55°C	General	Annual energy consumption	kWh				2,972			
			ηs (Seasonal space heating efficiency)	%				170			
Prated at 2°C			kW				9.6				
Qhe Annual energy consumption (GCV)			Gj				11				
B Condition (2°CDB/1°CWB)		Cdh (Degradation heating)					1.0				
		COPd					2.66				
		Pdh	kW				8.0				
C Condition (7°CDB/6°CWB)		PERd	%				106.5				
		Cdh (Degradation heating)					1.0				
		COPd					3.79				
D Condition (12°CDB/11°CWB)		Pdh	kW				6.7				
		PERd	%				151.5				
		Cdh (Degradation heating)					1.0				
Tbiv (bivalent temperature)		COPd					5.87				
	Pdh	kW				3.6					
	PERd	%				234.9					
Average climate water outlet 35°C	General	COPd					3.13				
		Pdh	kW				8.4				
		PERd	%				125.4				
Average climate water outlet 35°C	General	Tbiv	°C				4				
		Annual energy consumption	kWh		3,561				3,539		
		ηs (Seasonal space heating efficiency)	%		190				191		
		Prated at -10°C	kW				8.3				
		Qhe Annual energy consumption (GCV)	Gj				13				
Average climate water outlet 35°C	General	SCOP			4.81				4.84		
		Seasonal space heating eff. class					A+++				

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVH12S18E9W + EPRA08EW1	ETVH12S23E9W + EPRA08EW1	ETVH12S18E9W + EPRA10EW1	ETVH12S23E9W + EPRA10EW1	ETVH12S18E9W + EPRA12EW1	ETVH12S23E9W + EPRA12EW1		
Space heating Average climate water outlet 35°C	A Condition (7°CDB/-8°CWB)	COPd							3.20		
		Pdh	kW						7.5		
		PERd	%						128.0		
		B Condition (2°CDB/-8°CWB)			CdH (Degradation heating)			1.0			
		COPd			4.93						
		Pdh			4.4						
		PERd			197.2						
		C Condition (7°CDB/-8°CWB)			CdH (Degradation heating)			1.0			
		COPd			6.37						
	Pdh			4.3							
	PERd			254.8							
	D Condition (12°CDB/11°CWB)			CdH (Degradation heating)			1.0				
	COPd			8.13							
	Pdh			6.6							
	PERd			325.2							
	Tol (temperature operating limit)			COPd			2.90			2.86	
	Pdh			6.9						8.1	
	PERd			116.0						114.4	
	TOL			°C						-10	
	WTOL			°C						35	
	Tbiv (bivalent temperature)			COPd			3.20			2.86	
	Pdh			7.5						8.1	
	PERd			128.0						114.4	
	Tbiv			°C			-7			-10	
	Rated heat output supplementary capacity			Psup (at Tdesign -10°C)			1.4			0.0	
	Cold climate water outlet 35°C	General	Annual energy consumption	kWh	5,394		5,239		5,224		
			ηs (Seasonal space heating efficiency)	%	162		166		167		
Prated at -22°C			kW					9.0			
Qhe Annual energy consumption (GCV)			Gj					19			
A Condition (7°CDB/-8°CWB)			COPd			3.48					
Pdh			5.4								
PERd			139.2								
B Condition (2°CDB/-8°CWB)			CdH (Degradation heating)			1.0					
COPd			5.40								
Pdh			3.6								
PERd			216.0								
C Condition (7°CDB/-8°CWB)			CdH (Degradation heating)			1.0					

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETVH12S18E9W + EPRA08EW1	ETVH12S23E9W + EPRA08EW1	ETVH12S18E9W + EPRA10EW1	ETVH12S23E9W + EPRA10EW1	ETVH12S18E9W + EPRA12EW1	ETVH12S23E9W + EPRA12EW1			
Space heating Cold climate water outlet 35°C	C Condition (7°CDB- B/6°CWB)	COPd							6.53			
		Pdh	kW						5.3			
		PERd	%						261.2			
		D Condition (12°CDB/11°CWB)	CdH (Degradation heating)							1.0		
			COPd							7.98		
			Pdh	kW						6.6		
		Tol (tem- perature operat- ing limit)	PERd	%		319.0			319.2			
					COPd		2.11		2.14		2.16	
					Pdh	kW	4.9		5.9		6.5	
		TOL	°C			84.3		85.6		86.4		
	WTOL				°C			-22				
					°C			35				
	G Con- dition (-15°CDB/-)	PERd	%		2.68			2.64				
				COPd		6.0		7.0				
				Pdh	kW	107.1		105.6				
	Tbiv (bivalent tempera- ture)	Tbiv	°C		2.95			2.64				
				COPd		6.5		7.0				
				Pdh	kW	118.1		105.6				
	Rated heat output supple- mentary capacity	PERd	%		-12			-15				
				COPd		4.1		3.1		2.6		
Pdh				kW								
Warm climate water outlet 35°C	General	Annual energy consumption	kWh						1,954			
				ηs (Seasonal space heating efficiency)	%						232	
						Prated at 2°C	kW					8.6
								Qhe Annual energy consumption (GCV)	Gj			
				B Con- dition (2°CDB- B/1°CWB)	CdH (Degradation heating)							
	COPd									4.07		
	Pdh	kW								7.7		
	PERd	%								162.9		
	C Con- dition (7°CDB- B/6°CWB)	CdH (Degradation heating)										1.0
				COPd						5.85		
Pdh				kW					5.5			
PERd				%					234.1			
Tbiv (bivalent tempera- ture)				Tbiv	°C						4.97	
	COPd								6.9			
	Pdh	kW							198.9			
D Condition (12°CDB/11°CWB)	PERd	%						5				
			COPd						1.0			
			Pdh	kW					7.85			
Space heating Warm climate water	PERd	%						6.2				
			COPd						313.9			
			Pdh	kW								

(1)Capacity according to standard EN14511 and valid for heated water range dT = 3~8°C at Ta 7°C |
 (2)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) |
 (3)Power input is total input of indoor and outdoor units, including the circulation pump; according to EN14511 |
 (4)Test at Ta DB/WB 7°C/6°C. According to EN 16147. |
 (5)DB/WB 7°C/6°C - LWC 35°C (dT=5°C) with pump at full speed |
 Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB |
 Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB

Technical specifications				ETVX12S18E6V + EPRA08EW1	ETVX12S23E6V + EPRA08EW1	ETVX12S18E6V + EPRA10EW1	ETVX12S23E6V + EPRA10EW1	ETVX12S18E6V + EPRA12EW1	ETVX12S23E6V + EPRA12EW1
Indoor unit				ETVX12S18EA6V	ETVX12S23EA6V	ETVX12S18EA6V	ETVX12S23EA6V	ETVX12S18EA6V	ETVX12S23EA6V
Outdoor unit				EPRA08EAW1		EPRA10EAW1		EPRA12EAW1	
Heating capacity	Min.	kW		3.44 (1)					
	Nom.	kW		6.17 (2)					
	Max.	kW	7.95 (1)	9.25 (1)		9.97 (1)			
Cooling capacity	Nom.	kW	6.81 (3) / 6.47 (4)		7.97 (3) / 6.47 (4)		8.62 (3) / 6.47 (4)		

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVX12S18E6V + EPRA08EW1	ETVX12S23E6V + EPRA08EW1	ETVX12S18E6V + EPRA10EW1	ETVX12S23E6V + EPRA10EW1	ETVX12S18E6V + EPRA12EW1	ETVX12S23E6V + EPRA12EW1
Power input	Heating	Min.	kW	0.70 (5)					
		Nom.	kW	1.21 (2)					
		Max.	kW	1.63 (5)		1.98 (5)		2.21 (5)	
	Cooling	Nom.	kW	2.08 (3) / 1.13 (4)		2.57 (3) / 1.13 (4)		2.86 (3) / 1.13 (4)	
Domestic hot water from 10°C to 50°C	Dom.	Nom.	kWh	2.54 (6)	3.09 (6)	2.54 (6)	3.09 (6)	2.54 (6)	3.09 (6)
				1h 51min		2h 10min		1h 51min	
Heat up time from 10°C to 50°C			hr	1h 51min		2h 10min		1h 51min	
COP				5.10 (2)					
EER				3.28 (3) / 5.75 (4)		3.10 (3) / 5.75 (4)		3.01 (3) / 5.75 (4)	
Pump	Type	Grundfos UPM3LK							
	Nominal Heating ESP unit	kPa		59.8 (7)					
Water side Heat exchanger	Water flow rate	Heating	Nom.	18.3 (2)					
		l/min							
General	Supplier/Manu- facturer details	Name and address		Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium					
	Name or trademark		Daikin Europe N.V.						
	Product description	Air-to-water heat pump		Yes					
		Brine-to-water heat pump		No					
		Heat pump combination heater		Yes					
		Low-temperature heat pump		No					
		Supplementary heater integrated		Yes					
Water-to-water heat pump		No							
LW(A) Sound power level (according to EN14825)	Indoor	dB(A)		44.0					
LW(A) Sound power level (according to EN14825)	Outdoor	dB(A)		53.0					
Sound condition Ecodesign and energy label				Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825					
Tank	Name	Stainless steel domestic hot water tank 180 l		Stainless steel domestic hot water tank 230 L		Stainless steel domestic hot water tank 180 l		Stainless steel domestic hot water tank 230 L	
		Stainless steel domestic hot water tank 180 l		Stainless steel domestic hot water tank 230 L		Stainless steel domestic hot water tank 180 l		Stainless steel domestic hot water tank 230 L	
Space heating general	Air to water unit	Rated airflow (outdoor)		3,542					
		m ³ /h							
	Other	Capacity control		Inverter					
		Pck (Crankcase heater mode)		0.000					
		Poff (Off mode)		0.027					
		Psb (Standby mode)		0.027					
Pto (Thermostat off)		0.024							
Domestic hot water heating	General	Declared load profile		L					
Space heating general	Inte- grated supple- mentary heater	Psup		6.0					
		kW							
Type of energy input		Electrical							

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETVX12S18E6V + EPRA08EW1	ETVX12S23E6V + EPRA08EW1	ETVX12S18E6V + EPRA10EW1	ETVX12S23E6V + EPRA10EW1	ETVX12S18E6V + EPRA12EW1	ETVX12S23E6V + EPRA12EW1		
Domestic hot water heating	Average climate	AEC (Annual electricity consumption)	kWh	851	787	851	787	851	787		
		COPdhw		2.80	3.05	2.80	3.05	2.80	3.05		
		Heat up time		1h 57min	2h 14min	1h 57min	2h 14min	1h 57min	2h 14min		
		η _{wh} (water heating efficiency)	%	120	130	120	130	120	130		
		Qelec (Daily electricity consumption)	kWh	4.160	3.830	4.160	3.830	4.160	3.830		
		Reference hot water temperature	°C	53.0	52.0	53.0	52.0	53.0	52.0		
		Stand-by power input	W	50.7	43.9	50.7	43.9	50.7	43.9		
		Water heating energy efficiency class		A+							
		Cold climate	Average climate	AEC (Annual electricity consumption)	kWh	937	866	937	866	937	866
				COPdhw		2.55	2.77	2.55	2.77	2.55	2.77
				Heat up time		1h 55min	2h 02min	1h 55min	2h 02min	1h 55min	2h 02min
η _{wh} (water heating efficiency)	%			109	118	109	118	109	118		
Qelec (Daily electricity consumption)	kWh			4.570	4.200	4.570	4.200	4.570	4.200		
Reference hot water temperature	°C			53.0	52.0	53.0	52.0	53.0	52.0		
Stand-by power input	W			54.3	46.7	54.3	46.7	54.3	46.7		
Warm climate	Average climate			AEC (Annual electricity consumption)	kWh	699	648	699	648	699	648
		COPdhw		3.40	3.68	3.40	3.68	3.40	3.68		
		Heat up time		1h 54min	2h 06min	1h 54min	2h 06min	1h 54min	2h 06min		
		η _{wh} (water heating efficiency)	%	147	158	147	158	147	158		
		Qelec (Daily electricity consumption)	kWh	3.430	3.160	3.430	3.160	3.430	3.160		
		Reference hot water temperature	°C	53.0	52.0	53.0	52.0	53.0	52.0		
		Stand-by power input	W	44.6	39.0	44.6	39.0	44.6	39.0		
		Space heating	Average climate water outlet 55°C	General	Annual energy consumption	kWh	4,894		4,871		
η _s (Seasonal space heating efficiency)	%				141						
Prated at -10°C	Q _{he} Annual energy consumption (GCV)			Gj			8.5			18	
	SCOP				3.59		3.60				
A Condition (-7°CDB/-8°CWB)	Seasonal space heating eff. class					A++					
				C _{dh} (Degradation heating)		1.0					
B Condition (2°CDB/1°CWB)	COPd					2.30					
				P _d h	kW	7.6					
				PER _d	%	91.9					
B Condition (2°CDB/1°CWB)	COPd					1.0					
						3.50					
				P _d h	kW	4.6					

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVX12S18E6V + EPRA08EW1	ETVX12S23E6V + EPRA08EW1	ETVX12S18E6V + EPRA10EW1	ETVX12S23E6V + EPRA10EW1	ETVX12S18E6V + EPRA12EW1	ETVX12S23E6V + EPRA12EW1	
Space heating 	Average climate water outlet 55°C	B Condition (2°CDB/1°CWB)	PERd %	140.0						
		C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)		1.0					
			COPd		4.61					
			Pdh kW		3.0					
			PERd %		184.2					
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0					
			COPd		6.16					
			Pdh kW		3.7					
			PERd %		246.4					
		Tol (temperature operating limit)	COPd		2.01					2.05
	Pdh kW			7.0					8.3	
	PERd %			80.2					82.1	
	TOL °C			-10						
	Rated heat output supplementary capacity	Psup (at Tdesign -10°C)	kW	1.5					0.0	
		Tbiv (bivalent temperature)	COPd		2.30				2.05	
			Pdh kW		7.6				8.3	
			PERd %		91.9				82.1	
	Tbiv °C			-7				-10		
	Cold climate water outlet 55°C	General	Annual energy consumption	kWh	7,028			6,890		6,861
			ηs (Seasonal space heating efficiency)	%	123			126		
Prated at -22°C			kW	9.0						
Qhe Annual energy consumption (GCV)			Gj	25						
A Condition (-7°CDB/-8°CWB)		Cdh (Degradation heating)		1.0						
		COPd		2.61						
		Pdh kW		5.2						
		PERd %		104.2				104.4		
B Condition (2°CDB/1°CWB)		Cdh (Degradation heating)		1.0						
		COPd		3.90						
	Pdh kW		3.3							
	PERd %		156.0							
C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)		1.0							
	COPd		4.96							
	Pdh kW		3.4							
	PERd %		198.3							
D Condition (12°CDB/11°CWB)	COPd		6.56							
	Pdh kW		4.2							

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications					ETVX12S18E6V + EPRA08EW1	ETVX12S23E6V + EPRA08EW1	ETVX12S18E6V + EPRA10EW1	ETVX12S23E6V + EPRA10EW1	ETVX12S18E6V + EPRA12EW1	ETVX12S23E6V + EPRA12EW1
Space heating Cold climate water outlet 55°C	D Condition (12°CDB/11°CWB)	PERd	%		262.5					
		Tol (tem- perature operat- ing limit)	COPd		1.49		1.56		1.62	
		Pdh	kW		4.9		6.1		7.2	
	G Con- dition (-15°CDB/-)	PERd	%		59.6		62.3		64.7	
		TOL	°C				-22			
		WTOL	°C				55			
	Tbiv (bivalent tempera- ture)	COPd			2.00			2.03		
		Pdh	kW		6.0			7.2		
		PERd	%		80.0			81.2		
	Rated heat output supple- mentary capacity	Tbiv	°C		2.25			2.03		
		Pdh	kW		6.6			7.2		
		PERd	%		90.0			81.2		
	Warm climate water outlet 55°C	General	Tbiv	°C		-12			-15	
			Psup (at Tdesign -22°C)	kW		4.1		2.9		1.8
			Annual energy consumption	kWh		2,853				
ηs (Seasonal space heating efficiency)			%		177					
B Con- dition (2°CDB/ B/1°CWB)		Prated at 2°C	kW		9.6					
		Qhe Annual ener- gy consumption (GCV)	Gj		10					
		Cdh (Degradation heating)			1.0					
C Con- dition (7°CDB/ B/6°CWB)		COPd			2.66					
		Pdh	kW		8.0					
		PERd	%		106.5					
D Condition (12°CDB/11°CWB)		Cdh (Degradation heating)			1.0					
		COPd			3.79					
		Pdh	kW		6.7					
Tbiv (bivalent tempera- ture)		PERd	%		151.5					
		Cdh (Degradation heating)			1.0					
	COPd			5.87						
Average climate water outlet 35°C	Pdh	kW		3.6						
	PERd	%		234.9						
	Tbiv	°C		3.13						
General	Pdh	kW		8.4						
	PERd	%		125.4						
	Tbiv	°C		4						
Annual energy consumption	Annual energy consumption	kWh		3,462		3,440				
	ηs (Seasonal space heating efficiency)	%		195		196				
	Prated at -10°C	kW		8.3						

2 Specifications



1 - 1 EPRA08-12EW

Technical specifications				ETVX12S18E6V + EPRA08EW1	ETVX12S23E6V + EPRA08EW1	ETVX12S18E6V + EPRA10EW1	ETVX12S23E6V + EPRA10EW1	ETVX12S18E6V + EPRA12EW1	ETVX12S23E6V + EPRA12EW1	
Space heating 	Average climate water outlet 35°C	General	Qhe Annual energy consumption (GCV)	12						
		SCOP		4.95					4.98	
			Seasonal space heating eff. class		A+++					
		A Condition (-7°CDB/-8°CWB)	COPd		3.20					
			Pdh	kW	7.5					
			PERd	%	128.0					
		B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)		1.0					
			COPd		4.93					
			Pdh	kW	4.4					
			PERd	%	197.2					
		C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)		1.0					
			COPd		6.37					
			Pdh	kW	4.3					
			PERd	%	254.8					
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0					
			COPd		8.13					
			Pdh	kW	6.6					
			PERd	%	325.2					
		Tol (temperature operating limit)	COPd		2.90					2.86
			Pdh	kW	6.9					8.1
			PERd	%	116.0					114.4
			TOL	°C	-10					
			WTOL	°C	35					
Tbiv (bivalent temperature)	COPd		3.20					2.86		
	Pdh	kW	7.5					8.1		
	PERd	%	128.0					114.4		
	Tbiv	°C	-7							
Rated heat output supplementary capacity	Psup (at Tdesign -10°C)	kW	1.4					0.0		
Cold climate water outlet 35°C	General	Annual energy consumption	kWh	5,334				5,180	5,165	
		ηs (Seasonal space heating efficiency)	%	163				168	169	
		Prated at -22°C	kW	9.0						
		Qhe Annual energy consumption (GCV)	Gj	19						
	A Condition (-7°CDB/-8°CWB)	COPd		3.48						
		Pdh	kW	5.4						
		PERd	%	139.2						
	B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)		1.0						
		COPd		5.40						

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETVX12S18E6V + EPRA08EW1	ETVX12S23E6V + EPRA08EW1	ETVX12S18E6V + EPRA10EW1	ETVX12S23E6V + EPRA10EW1	ETVX12S18E6V + EPRA12EW1	ETVX12S23E6V + EPRA12EW1		
Space heating 	Cold climate water outlet 35°C	B Condition (2°CDB- B/1°CWB)	Pdh	kW						3.6	
			PERd	%						216.0	
		C Condition (7°CDB- B/6°CWB)	Cd _h (Degradation heating)				1.0				
			COP _d				6.53				
			Pdh	kW						5.3	
			PERd	%						261.2	
		D Condition (12°CDB/11°CWB)	Cd _h (Degradation heating)				1.0				
			COP _d				7.98				
			Pdh	kW			6.6				
		Tol (temperature operating limit)	COP _d			319.0				319.2	
				2.11		2.14		2.16			
	Pdh		kW	4.9		5.9		6.5			
	PERd		%	84.3		85.6		86.4			
	TOL		°C							-22	
	G Condition (-15°CDB/-)	COP _d			2.68				2.64		
					6.0		7.0		7.0		
		Pdh	kW	107.1		105.6		105.6			
		Tbiv (bivalent temperature)	COP _d		2.95		2.64		2.64		
			Pdh	kW	6.5		7.0		7.0		
			PERd	%	118.1		105.6		105.6		
Tbiv		°C	-12		-15		-15				
Rated heat output supplementary capacity	Psup (at Tdesign -22°C)	kW	4.1		3.1		2.6				
Warm climate water outlet 35°C	General	Annual energy consumption						1,835			
		η _s (Seasonal space heating efficiency)						247			
		Prated at 2°C						8.6			
		Q _{he} Annual energy consumption (GCV)		7		-		7			
	B Condition (2°CDB- B/1°CWB)	Cd _h (Degradation heating)				1.0					
		COP _d				4.07					
	C Condition (7°CDB- B/6°CWB)	Pdh	kW						7.7		
		PERd	%						162.9		
	D Condition (12°CDB/11°CWB)	Cd _h (Degradation heating)				1.0					
		COP _d				5.85					
Tbiv (bivalent temperature)	Pdh	kW						5.5			
	PERd	%						234.1			
Space heating 	Warm climate water outlet 35°C	Tbiv (bivalent temperature)	PERd	%						198.9	
			Tbiv	°C						5	
D Condition (12°CDB/11°CWB)	Cd _h (Degradation heating)				1.0						
	COP _d				7.85						
	Pdh	kW						6.2			
	PERd	%						313.9			

(1)Capacity according to standard EN14511 and valid for heated water range dT = 3~8°C at Ta 7°C |
 (2)Condition: Ta DB/WB 7°C/6°C - LWC 35°C. (DT = 5°C) |
 (3)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB |
 (4)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB |
 (5)Power input is total input of indoor and outdoor units, including the circulation pump; according to EN14511 |
 (6)Test at Ta DB/WB 7°C/6°C. According to EN 16147. |
 (7)DB/WB 7°C/6°C - LWC 35°C. (dT=5°C) with pump at full speed

Technical specifications				ETVX12S18E9W + EPRA08EW1	ETVX12S23E9W + EPRA08EW1	ETVX12S18E9W + EPRA10EW1	ETVX12S23E9W + EPRA10EW1	ETVX12S18E9W + EPRA12EW1	ETVX12S23E9W + EPRA12EW1
Indoor unit				ETVX12S18EA9W	ETVX12S23EA9W	ETVX12S18EA9W	ETVX12S23EA9W	ETVX12S18EA9W	ETVX12S23EA9W
Outdoor unit				EPRA08EAW1		EPRA10EAW1		EPRA12EAW1	
Heating capacity	Min.		kW			3.44 (1)			
	Nom.		kW			6.17 (2)			
	Max.		kW	7.95 (1)		9.25 (1)		9.97 (1)	

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVX12S18E9W + EPRA08EW1	ETVX12S23E9W + EPRA08EW1	ETVX12S18E9W + EPRA10EW1	ETVX12S23E9W + EPRA10EW1	ETVX12S18E9W + EPRA12EW1	ETVX12S23E9W + EPRA12EW1
Cooling capacity	Nom.		kW	6.81 (3) / 6.47 (4)		7.97 (3) / 6.47 (4)		8.62 (3) / 6.47 (4)	
Power input	Heating	Min.	kW	0.70 (5)					
		Nom.	kW	1.21 (2)					
	Max.	kW	1.63 (5)		1.98 (5)		2.21 (5)		
	Cooling	Nom.	kW	2.08 (3) / 1.13 (4)		2.57 (3) / 1.13 (4)		2.86 (3) / 1.13 (4)	
Domestic hot water from 10°C to 50°C		Nom.	kWh	2.54 (6)	3.09 (6)	2.54 (6)	3.09 (6)	2.54 (6)	3.09 (6)
Heat up time from 10°C to 50°C			hr	1h 51min	2h 10min	1h 51min	2h 10min	1h 51min	2h 10min
COP				5.10 (2)					
EER				3.28 (3) / 5.75 (4)		3.10 (3) / 5.75 (4)		3.01 (3) / 5.75 (4)	
Pump	Type			Grundfos UPM3LK					
	Nominal ESP unit	Heating	kPa	59.8 (7)					
Water side Heat exchanger	Water flow rate	Heating	Nom.						
General	Supplier/Manu- facturer details	Name and address		Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium					
		Name or trademark		Daikin Europe N.V.					
Product description	Air-to-water heat pump Brine-to-water heat pump Heat pump combination heater Low-temperature heat pump Supplementary heater integrated Water-to-water heat pump			Yes					
				No					
				Yes					
				No					
				Yes					
				No					
LW(A) Sound power level (according to EN14825)	Indoor		dB(A)	44.0					
LW(A) Sound power level (according to EN14825)	Outdoor		dB(A)	53.0					
Sound condition Ecodesign and energy label				Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825					
Tank	Name			Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L
Space heating general	Air to water unit	Rated airflow (outdoor)	m ³ /h	3,542					
		Other	Capacity control	Inverter					
		Pck (Crankcase heater mode)	kW	0.000					
		Poff (Off mode)	kW	0.027					
		Psb (Standby mode)	kW	0.027					
		Pto (Thermostat off)	kW	0.024					
Domestic hot water heating	General	Declared load profile		L					
Space heating general	Inte- grated supple- mentary heater	Psup	kW	9.0					
		Type of energy input		Electrical					

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETVX12S18E9W + EPRA08EW1	ETVX12S23E9W + EPRA08EW1	ETVX12S18E9W + EPRA10EW1	ETVX12S23E9W + EPRA10EW1	ETVX12S18E9W + EPRA12EW1	ETVX12S23E9W + EPRA12EW1		
Domestic hot water heating	Average climate	AEC (Annual electricity consumption)	kWh	851	787	851	787	851	787		
		COPdhw		2.80	3.05	2.80	3.05	2.80	3.05		
		Heat up time		1h 57min	2h 14min	1h 57min	2h 14min	1h 57min	2h 14min		
		ηwh (water heating efficiency)	%	120	130	120	130	120	130		
		Qelec (Daily electricity consumption)	kWh	4.160	3.830	4.160	3.830	4.160	3.830		
		Reference hot water temperature	°C	53.0	52.0	53.0	52.0	53.0	52.0		
		Stand-by power input	W	50.7	43.9	50.7	43.9	50.7	43.9		
		Water heating energy efficiency class		A+							
		Cold climate	Average climate	AEC (Annual electricity consumption)	kWh	937	866	937	866	937	866
				COPdhw		2.55	2.77	2.55	2.77	2.55	2.77
Heat up time				1h 55min	2h 02min	1h 55min	2h 02min	1h 55min	2h 02min		
ηwh (water heating efficiency)	%			109	118	109	118	109	118		
Qelec (Daily electricity consumption)	kWh			4.570	4.200	4.570	4.200	4.570	4.200		
Reference hot water temperature	°C			53.0	52.0	53.0	52.0	53.0	52.0		
Stand-by power input	W			54.3	46.7	54.3	46.7	54.3	46.7		
Warm climate	Average climate			AEC (Annual electricity consumption)	kWh	699	648	699	648	699	648
		COPdhw		3.40	3.68	3.40	3.68	3.40	3.68		
		Heat up time		1h 54min	2h 06min	1h 54min	2h 06min	1h 54min	2h 06min		
		ηwh (water heating efficiency)	%	147	158	147	158	147	158		
		Qelec (Daily electricity consumption)	kWh	3.430	3.160	3.430	3.160	3.430	3.160		
		Reference hot water temperature	°C	53.0	52.0	53.0	52.0	53.0	52.0		
		Stand-by power input	W	44.6	39.0	44.6	39.0	44.6	39.0		
		Space heating	Average climate water outlet 55°C	General	Annual energy consumption	kWh	4,894		4,871		
ηs (Seasonal space heating efficiency)	%				141						
Prated at -10°C	Qhe Annual energy consumption (GCV)			Gj	18						
	SCOP				3.59		3.60				
A Condition (-7°CDB/-8°CWB)	Cdhw (Degradation heating)					A++					
				COPd		1.0					
B Condition (2°CDB/1°CWB)	Cdhw (Degradation heating)			Pdh	kW	2.30					
				PERd	%	7.6					
				COPd		91.9					
B Condition (2°CDB/1°CWB)	Cdhw (Degradation heating)					1.0					
				COPd		3.50					
				Pdh	kW	4.6					

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVX12S18E9W + EPRA08EW1	ETVX12S23E9W + EPRA08EW1	ETVX12S18E9W + EPRA10EW1	ETVX12S23E9W + EPRA10EW1	ETVX12S18E9W + EPRA12EW1	ETVX12S23E9W + EPRA12EW1		
Space heating 	Average climate water outlet 55°C	B Condition (2°CDB/1°CWB)	PERd %	140.0							
		C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)		1.0						
			COPd		4.61						
			Pdh kW		3.0						
			PERd %		184.2						
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0						
			COPd		6.16						
			Pdh kW		3.7						
			PERd %		246.4						
		Tol (temperature operating limit)	COPd		2.01					2.05	
	Pdh kW			7.0					8.3		
	PERd %			80.2					82.1		
	TOL °C			-10							
	Rated heat output supplementary capacity	Psup (at Tdesign -10°C)	kW	1.5					0.0		
			Tbiv COPd	2.30					2.05		
		(bivalent temperature)	Pdh kW	7.6					8.3		
			PERd %	91.9					82.1		
			Tbiv °C	-7					-10		
		Cold climate water outlet 55°C	General	Annual energy consumption kWh	7,028			6,890			6,861
				ηs (Seasonal space heating efficiency) %	123				126		
Prated at -22°C kW							9.0				
A Condition (-7°CDB/-8°CWB)	Qhe Annual energy consumption (GCV) GJ						25				
	Cdh (Degradation heating)			1.0							
	COPd			2.61							
B Condition (2°CDB/1°CWB)	Pdh kW		5.2								
	PERd %		104.2					104.4			
	Cdh (Degradation heating)		1.0								
	COPd		3.90								
C Condition (7°CDB/6°CWB)	Pdh kW		3.3								
	PERd %		156.0								
	Cdh (Degradation heating)		1.0								
D Condition (12°CDB/11°CWB)	COPd		4.96								
	Pdh kW		3.4								
	PERd %		198.3								
	D Condition (12°CDB/11°CWB)	COPd		6.56							
		Pdh kW		4.2							

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETVX12S18E9W + EPRA08EW1	ETVX12S23E9W + EPRA08EW1	ETVX12S18E9W + EPRA10EW1	ETVX12S23E9W + EPRA10EW1	ETVX12S18E9W + EPRA12EW1	ETVX12S23E9W + EPRA12EW1
Space heating Cold climate water outlet 55°C	D Condition (12°CDB/11°CWB)	PERd	%	262.5					
		Tol (tem- perature operat- ing limit)	COPd		1.49		1.56		1.62
			Pdh	kW	4.9		6.1		7.2
			PERd	%	59.6		62.3		64.7
			TOL	°C			-22		
		WTOL	°C			55			
		G Con- dition (-15°CDB/-)	COPd		2.00			2.03	
			Pdh	kW	6.0			7.2	
			PERd	%	80.0			81.2	
		Tbiv (bivalent tempera- ture)	COPd		2.25			2.03	
			Pdh	kW	6.6			7.2	
			PERd	%	90.0			81.2	
			Tbiv	°C	-12			-15	
		Rated heat output supple- mentary capacity	Psup (at Tdesign -22°C)	kW	4.1		2.9		1.8
	Warm climate water outlet 55°C	General	Annual energy consumption	kWh	2,853				
ηs (Seasonal space heating efficiency)			%	177					
Prated at 2°C			kW	9.6					
Qhe Annual ener- gy consumption (GCV)			Gj	10					
B Con- dition (2°CDB- B/1°CWB)		Cdh (Degradation heating)		1.0					
		COPd		2.66					
		Pdh	kW	8.0					
C Con- dition (7°CDB- B/6°CWB)		Cdh (Degradation heating)		1.0					
		COPd		3.79					
		Pdh	kW	6.7					
D Condition (12°CDB/11°CWB)		Cdh (Degradation heating)		1.0					
		COPd		5.87					
		Pdh	kW	3.6					
		PERd	%	234.9					
Tbiv (bivalent tempera- ture)		COPd		3.13					
	Pdh	kW	8.4						
	PERd	%	125.4						
	Tbiv	°C	4						
Average climate water outlet 35°C	General	Annual energy consumption	kWh	3,462				3,440	
		ηs (Seasonal space heating efficiency)	%	195				196	
		Prated at -10°C	kW	8.3					

2 Specifications



1 - 1 EPRA08-12EW

Technical specifications				ETVX12S18E9W + EPRA08EW1	ETVX12S23E9W + EPRA08EW1	ETVX12S18E9W + EPRA10EW1	ETVX12S23E9W + EPRA10EW1	ETVX12S18E9W + EPRA12EW1	ETVX12S23E9W + EPRA12EW1		
Space heating 	Average climate water outlet 35°C	General	Qhe Annual energy consumption (GCV)	12							
			SCOP	4.95		4.98					
			Seasonal space heating eff. class	A+++							
		A Condition (-7°CDB/-8°CWB)	COPd		3.20						
			Pdh	kW	7.5						
			PERd	%	128.0						
		B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)		1.0						
			COPd		4.93						
			Pdh	kW	4.4						
		C Condition (7°CDB/6°CWB)	PERd	%	197.2						
			Cdh (Degradation heating)		1.0						
			COPd		6.37						
		D Condition (12°CDB/11°CWB)	Pdh	kW	4.3						
			PERd	%	254.8						
			Cdh (Degradation heating)		1.0						
		Tol (temperature operating limit)	COPd		2.90		2.86				
			Pdh	kW	6.9		8.1				
			PERd	%	116.0		114.4				
			TOL	°C	-10						
		Tbiv (bivalent temperature)	WTOL	°C	35						
			COPd		3.20		2.86				
			Pdh	kW	7.5		8.1				
			PERd	%	128.0		114.4				
		Rated heat output supplementary capacity	Tbiv	°C	-7				-10		
Psup (at Tdesign -10°C)	kW		1.4		0.0						
Cold climate water outlet 35°C	General	Annual energy consumption	kWh	5,334		5,180		5,165			
		ηs (Seasonal space heating efficiency)	%	163		168		169			
		Prated at -22°C	kW	9.0							
		Qhe Annual energy consumption (GCV)	Gj	19							
		A Condition (-7°CDB/-8°CWB)	COPd		3.48						
			Pdh	kW	5.4						
			PERd	%	139.2						
		B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)		1.0						
			COPd		5.40						

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETVX12S18E9W + EPRA08EW1	ETVX12S23E9W + EPRA08EW1	ETVX12S18E9W + EPRA10EW1	ETVX12S23E9W + EPRA10EW1	ETVX12S18E9W + EPRA12EW1	ETVX12S23E9W + EPRA12EW1			
Space heating 	Cold climate water outlet 35°C	B Condition (2°CDB- B/1°CWB)	Pdh	kW						3.6		
			PERd	%						216.0		
		C Condition (7°CDB- B/6°CWB)	CdH (Degradation heating)									1.0
			COPd									6.53
			Pdh	kW								5.3
			PERd	%								261.2
		D Condition (12°CDB/11°CWB)	CdH (Degradation heating)									1.0
			COPd									7.98
			Pdh	kW								6.6
			PERd	%	319.0				319.2			
	Tol (temperature operating limit)	COPd		2.11					2.14	2.16		
		Pdh	kW	4.9					5.9	6.5		
		PERd	%	84.3					85.6	86.4		
		TOL	°C								-22	
	G Condition (-15°CDB/-)	COPd		2.68					2.64			
		Pdh	kW	6.0					7.0			
		PERd	%	107.1					105.6			
		Tbiv (bivalent temperature)	COPd		2.95					2.64		
	Pdh		kW	6.5					7.0			
	PERd		%	118.1					105.6			
Tbiv	°C		-12					-15				
Rated heat output supplementary capacity	Psup (at Tdesign -22°C)		4.1					3.1	2.6			
Warm climate water outlet 35°C	General	Annual energy consumption							1,835			
		ηs (Seasonal space heating efficiency)							247			
		Prated at 2°C							8.6			
		Qhe Annual energy consumption (GCV)		7				-	7			
	B Condition (2°CDB- B/1°CWB)	CdH (Degradation heating)									1.0	
		COPd									4.07	
	C Condition (7°CDB- B/6°CWB)	CdH (Degradation heating)									1.0	
		COPd									5.85	
	Tbiv (bivalent temperature)	Pdh									5.5	
		PERd									234.1	
Space heating 	Warm climate water outlet 35°C	COPd									4.97	
		Pdh									6.9	
D Condition (12°CDB/11°CWB)	PERd		198.9					5				
	CdH (Degradation heating)									1.0		
	COPd									7.85		
	PERd		6.2					6.2				
		313.9					313.9					

- (1)Capacity according to standard EN14511 and valid for heated water range dT = 3~8°C at Ta 7°C |
- (2)Condition: Ta DB/WB 7°C/6°C - LWC 35°C. (DT = 5°C) |
- (3)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB |
- (4)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB |
- (5)Power input is total input of indoor and outdoor units, including the circulation pump; according to EN14511 |
- (6)Test at Ta DB/WB 7°C/6°C. According to EN 16147. |
- (7)DB/WB 7°C/6°C - LWC 35°C. (dT=5°C) with pump at full speed

Technical specifications				ETVZ12S18E6V + EPRA08EW1	ETVZ12S23E6V + EPRA08EW1	ETVZ12S18E6V + EPRA10EW1	ETVZ12S23E6V + EPRA10EW1	ETVZ12S18E6V + EPRA12EW1	ETVZ12S23E6V + EPRA12EW1
Indoor unit				ETVZ12S18EA6V	ETVZ12S23EA6V	ETVZ12S18EA6V	ETVZ12S23EA6V	ETVZ12S18EA6V	ETVZ12S23EA6V
Outdoor unit				EPRA08EAW1		EPRA10EAW1		EPRA12EAW1	
Heating capacity	Min.					3.44 (1)			
	Nom.					6.17 (2)			
	Max.			7.95 (1)				9.25 (1)	9.97 (1)

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVZ12S18E6V + EPRA08EW1	ETVZ12S23E6V + EPRA08EW1	ETVZ12S18E6V + EPRA10EW1	ETVZ12S23E6V + EPRA10EW1	ETVZ12S18E6V + EPRA12EW1	ETVZ12S23E6V + EPRA12EW1	
Power input	Heating	Min.	kW	0.70 (3)						
		Nom.	kW	1.21 (2)						
		Max.	kW	1.63 (3)		1.98 (3)		2.21 (3)		
	Domestic hot water from 10°C to 50°C	Nom.	kWh	2.54 (4)	3.09 (4)	2.54 (4)	3.09 (4)	2.54 (4)	3.09 (4)	
Heat up time from 10°C to 50°C			hr	1h 51min	2h 10min	1h 51min	2h 10min	1h 51min	2h 10min	
COP				5.10 (2)						
Pump	Type			Grundfos UPM3 K						
Pump Additional Zone	Nominal ESP unit	Heating	kPa	44.9 (5)						
Pump Main Zone	Nominal ESP unit	Heating	kPa	50.0 (5)						
Water side Heat exchanger	Water flow rate	Heating	Nom. l/min	18.3 (2)						
General	Supplier/Manufacturer details		Name and address	Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium						
			Name or trademark	Daikin Europe N.V.						
	Product description	Air-to-water heat pump			Yes					
		Brine-to-water heat pump			No					
		Heat pump combination heater			Yes					
		Low-temperature heat pump			No					
		Supplementary heater integrated			Yes					
	Water-to-water heat pump			No						
LW(A) Sound power level (according to EN14825)	Indoor		dB(A)	44.0						
LW(A) Sound power level (according to EN14825)	Outdoor		dB(A)	53.0						
Sound condition Ecodesign and energy label				Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825						
Tank	Name			Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	
Space heating general	Air to water unit	Rated airflow (outdoor)	m ³ /h	3,542						
	Other	Capacity control			Inverter					
		Pck (Crankcase heater mode)		kW	0.000					
		Poff (Off mode)		kW	0.027					
		Psb (Standby mode)		kW	0.027					
		Pto (Thermostat off)		kW	0.024					
Domestic hot water heating	General	Declared load profile		L						
Space heating general	Integrated supplementary heater	Psup		kW						
		Type of energy input		Electrical						

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETVZ12S18E6V + EPRA08EW1	ETVZ12S23E6V + EPRA08EW1	ETVZ12S18E6V + EPRA10EW1	ETVZ12S23E6V + EPRA10EW1	ETVZ12S18E6V + EPRA12EW1	ETVZ12S23E6V + EPRA12EW1		
Domestic hot water heating	Average climate	AEC (Annual electricity consumption)	kWh	851	787	851	787	851	787		
		COPdhw		2.80	3.05	2.80	3.05	2.80	3.05		
		Heat up time		1h 57min	2h 14min	1h 57min	2h 14min	1h 57min	2h 14min		
		η _{wh} (water heating efficiency)	%	120	130	120	130	120	130		
		Qelec (Daily electricity consumption)	kWh	4.160	3.830	4.160	3.830	4.160	3.830		
		Reference hot water temperature	°C	53.0	52.0	53.0	52.0	53.0	52.0		
		Stand-by power input	W	50.7	43.9	50.7	43.9	50.7	43.9		
		Water heating energy efficiency class		A+							
		Cold climate	Average climate	AEC (Annual electricity consumption)	kWh	937	866	937	866	937	866
				COPdhw		2.55	2.77	2.55	2.77	2.55	2.77
Heat up time				1h 55min	2h 02min	1h 55min	2h 02min	1h 55min	2h 02min		
η _{wh} (water heating efficiency)	%			109	118	109	118	109	118		
Qelec (Daily electricity consumption)	kWh			4.570	4.200	4.570	4.200	4.570	4.200		
Reference hot water temperature	°C			53.0	52.0	53.0	52.0	53.0	52.0		
Stand-by power input	W			54.3	46.7	54.3	46.7	54.3	46.7		
Warm climate	Average climate			AEC (Annual electricity consumption)	kWh	699	648	699	648	699	648
		COPdhw		3.40	3.68	3.40	3.68	3.40	3.68		
		Heat up time		1h 54min	2h 06min	1h 54min	2h 06min	1h 54min	2h 06min		
		η _{wh} (water heating efficiency)	%	147	158	147	158	147	158		
		Qelec (Daily electricity consumption)	kWh	3.430	3.160	3.430	3.160	3.430	3.160		
		Reference hot water temperature	°C	53.0	52.0	53.0	52.0	53.0	52.0		
		Stand-by power input	W	44.6	39.0	44.6	39.0	44.6	39.0		
		Space heating	Average climate water outlet 55°C	General	Annual energy consumption	kWh	4,993		4,970		
η _s (Seasonal space heating efficiency)	%				138						
Prated at -10°C	Q _{he} Annual energy consumption (GCV)			Gj	18						
	SCOP				3.52		3.53				
Seasonal space heating eff. class					A++						
	A Condition (7°CDB/-8°CWB)			Cdh (Degradation heating)		1.0					
A Condition (7°CDB/-8°CWB)	COPd				2.30						
	Pdh			kW	7.6						
	PERd			%	91.9						
B Condition (2°CDB/-B/1°CWB)	Cdh (Degradation heating)				1.0						
	COPd				3.50						
	Pdh			kW	4.6						
B Condition (2°CDB/-B/1°CWB)	PERd			%	140.0						
	C Condition (7°CDB/-B/6°CWB)	Cdh (Degradation heating)		1.0							

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVZ12S18E6V + EPRA08EW1	ETVZ12S23E6V + EPRA08EW1	ETVZ12S18E6V + EPRA10EW1	ETVZ12S23E6V + EPRA10EW1	ETVZ12S18E6V + EPRA12EW1	ETVZ12S23E6V + EPRA12EW1		
Space heating	Average climate water outlet 55°C	C Condition (7°CDB/6°CWB)	COPd					4.61			
			Pdh	kW				3.0			
			PERd	%				184.2			
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)					1.0			
			COPd					6.16			
			Pdh	kW				3.7			
		Tol (temperature operating limit)	TOL	WTOL	°C				-10		
				COPd		2.01			2.05		
				Pdh	kW	7.0			8.3		
	Cold climate water outlet 55°C	General	Annual energy consumption	kWh	7,088			6,950		6,921	
			ηs (Seasonal space heating efficiency)	%	122			125			
			Prated at -22°C	kW				9.0			
		A Condition (7°CDB/6°CWB)	Cdh (Degradation heating)	COPd					1.0		
				Pdh	kW				5.2		
				PERd	%	104.2			104.4		
		B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)	COPd					1.0		
				Pdh	kW				3.3		
				PERd	%				156.0		
C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)	COPd					1.0				
		Pdh	kW				4.96				
		PERd	%				3.4				
D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)	COPd					198.3				
		Pdh	kW				6.56				
		PERd	%				4.2				
Tol (temperature operating limit)	TOL	WTOL	°C				262.5				
		COPd		1.49		1.56		1.62			

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETVZ12S18E6V + EPRA08EW1	ETVZ12S23E6V + EPRA08EW1	ETVZ12S18E6V + EPRA10EW1	ETVZ12S23E6V + EPRA10EW1	ETVZ12S18E6V + EPRA12EW1	ETVZ12S23E6V + EPRA12EW1	
Space heating Cold climate water outlet 55°C	Tol (temperature operating limit)	Pdh	kW	4.9			6.1		7.2	
		PERd	%	59.6			62.3		64.7	
		TOL	°C				-22			
	G Condition (-15°CDB/-)	COPd	Pdh	kW	2.00				2.03	
			PERd	%	80.0				81.2	
			Tbiv	°C				55		
	(bivalent temperature)	COPd	Pdh	kW	2.25				2.03	
			PERd	%	6.6				7.2	
			Tbiv	°C	90.0				81.2	
	Rated heat output supplementary capacity	Psup (at Tdesign -22°C)	Pdh	kW	4.1			2.9		1.8
			PERd	%						
			Tbiv	°C						
	Warm climate water outlet 55°C	General	Annual energy consumption	kWh				2,972		
ηs (Seasonal space heating efficiency)			%				170			
Prated at 2°C			kW				9.6			
Qhe Annual energy consumption (GCV)			Gj				11			
B Condition (2°CDB/1°CWB)		COPd	Cdh (Degradation heating)				1.0			
			Pdh	kW			2.66			
			PERd	%			8.0			
C Condition (7°CDB/6°CWB)		COPd	Cdh (Degradation heating)				1.0			
			Pdh	kW			3.79			
			PERd	%			6.7			
D Condition (12°CDB/11°CWB)		COPd	Cdh (Degradation heating)				1.0			
			Pdh	kW			5.87			
			PERd	%			3.6			
Tbiv (bivalent temperature)	COPd	Pdh	kW			234.9				
		PERd	%			3.13				
		Tbiv	°C			8.4				
Average climate water outlet 35°C	General	Annual energy consumption	kWh	3,561				3,539		
		ηs (Seasonal space heating efficiency)	%	190				191		
		Prated at -10°C	kW				8.3			
		Qhe Annual energy consumption (GCV)	Gj				13			
		SCOP			4.81			4.84		

2 Specifications



1 - 1 EPRA08-12EW

Technical specifications				ETVZ12S18E6V + EPRA08EW1	ETVZ12S23E6V + EPRA08EW1	ETVZ12S18E6V + EPRA10EW1	ETVZ12S23E6V + EPRA10EW1	ETVZ12S18E6V + EPRA12EW1	ETVZ12S23E6V + EPRA12EW1	
Space heating 	Average climate water outlet 35°C	General	Seasonal space heating eff. class	A+++						
		A Condition (7°CDB/-8°CWB)	COPd	3.20						
			Pdh	kW	7.5					
			PERd	%	128.0					
		B Con- dition (2°CDB- B/1°CWB)	Cdh (Degradation heating)	1.0						
			COPd	4.93						
			Pdh	kW	4.4					
			PERd	%	197.2					
		C Con- dition (7°CDB- B/6°CWB)	Cdh (Degradation heating)	1.0						
			COPd	6.37						
			Pdh	kW	4.3					
			PERd	%	254.8					
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)	1.0						
			COPd	8.13						
			Pdh	kW	6.6					
			PERd	%	325.2					
		Tol (tem- perature operat- ing limit)	COPd			2.90			2.86	
			Pdh	kW	6.9				8.1	
			PERd	%	116.0				114.4	
			TOL	°C	-10					
			WTOL	°C	35					
		Tbiv (bivalent tempera- ture)	COPd			3.20			2.86	
			Pdh	kW	7.5				8.1	
	PERd	%	128.0				114.4			
	Tbiv	°C	-7				-10			
Rated heat output supple- mentary capacity	Psup (at Tdesign -10°C)	kW	1.4				0.0			
Cold climate water outlet 35°C	General	Annual energy consumption	kWh	5,394		5,239		5,224		
		ηs (Seasonal space heating efficiency)	%	162		166		167		
		Prated at -22°C	kW	9.0						
		Qhe Annual ener- gy consumption (GCV)	Gj	19						
		A Condition (7°CDB/-8°CWB)	COPd	3.48						
			Pdh	kW	5.4					
			PERd	%	139.2					
		B Con- dition (2°CDB- B/1°CWB)	Cdh (Degradation heating)	1.0						
			COPd	5.40						
			Pdh	kW	3.6					
	PERd	%	216.0							

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETVZ12S18E6V + EPRA08EW1	ETVZ12S23E6V + EPRA08EW1	ETVZ12S18E6V + EPRA10EW1	ETVZ12S23E6V + EPRA10EW1	ETVZ12S18E6V + EPRA12EW1	ETVZ12S23E6V + EPRA12EW1		
Space heating 	Cold climate water outlet 35°C	C Condition (7°CDB- B/6°CWB)	Cdh (Degradation heating)						1.0		
			COPd						6.53		
			Pdh kW						5.3		
		PERd %						261.2			
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)							1.0	
			COPd							7.98	
			Pdh kW							6.6	
		PERd %				319.0				319.2	
			Tol (temperature operating limit)	COPd		2.11		2.14			2.16
			Pdh kW		4.9		5.9			6.5	
	PERd %			84.3		85.6			86.4		
		TOL °C							-22		
	WTOL °C								35		
		G Condition (-15°CDB/-)	COPd		2.68				2.64		
	Pdh kW			6.0				7.0			
	PERd %			107.1				105.6			
	Tbiv (bivalent temperature)	COPd		2.95				2.64			
		Pdh kW		6.5				7.0			
		PERd %		118.1				105.6			
		Tbiv °C		-12				-15			
Rated heat output supplementary capacity	General	Psup (at Tdesign -22°C)	kW	4.1		3.1			2.6		
		Annual energy consumption	kWh						1,954		
Warm climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%						232		
		Prated at 2°C	kW						8.6		
		Qhe Annual energy consumption (GCV)	Gj						7		
		B Condition (2°CDB- B/1°CWB)	Cdh (Degradation heating)							1.0	
	COPd								4.07		
	Pdh kW								7.7		
	PERd %							162.9			
	C Condition (7°CDB- B/6°CWB)	Cdh (Degradation heating)							1.0		
		COPd							5.85		
		Pdh kW							5.5		
PERd %							234.1				
Tbiv (bivalent temperature)	COPd							4.97			
	Pdh kW							6.9			
	PERd %							198.9			
Tbiv °C							5				
Space heating 	Warm climate water outlet	D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)						1.0		
			COPd						7.85		
		Pdh kW							6.2		
		PERd %							313.9		

(1)Capacity according to standard EN14511 and valid for heated water range dT = 3~8°C at Ta 7°C |
 (2)Condition: Ta DB/WB 7°C/6°C - LWC 35°C. (DT = 5°C) |
 (3)Power input is total input of indoor and outdoor units, including the circulation pump; according to EN14511 |
 (4)Test at Ta DB/WB 7°C/6°C. According to EN 16147. |
 (5)DB/WB 7°C/6°C - LWC 35°C (dT=5°C) with pump at full speed |
 Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB |
 Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB

Technical specifications				ETVZ12S18E9W + EPRA08EW1	ETVZ12S23E9W + EPRA08EW1	ETVZ12S18E9W + EPRA10EW1	ETVZ12S23E9W + EPRA10EW1	ETVZ12S18E9W + EPRA12EW1	ETVZ12S23E9W + EPRA12EW1
Indoor unit				ETVZ12S18EA9W	ETVZ12S23EA9W	ETVZ12S18EA9W	ETVZ12S23EA9W	ETVZ12S18EA9W	ETVZ12S23EA9W
Outdoor unit				EPRA08EAW1		EPRA10EAW1		EPRA12EAW1	
Heating capacity	Min.	kW				3.44 (1)			
	Nom.	kW				6.17 (2)			
	Max.	kW		7.95 (1)		9.25 (1)			9.97 (1)

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVZ12S18E9W + EPRA08EW1	ETVZ12S23E9W + EPRA08EW1	ETVZ12S18E9W + EPRA10EW1	ETVZ12S23E9W + EPRA10EW1	ETVZ12S18E9W + EPRA12EW1	ETVZ12S23E9W + EPRA12EW1
Power input	Heating	Min.	kW	0.70 (3)					
		Nom.	kW	1.21 (2)					
		Max.	kW	1.63 (3)		1.98 (3)		2.21 (3)	
Domestic hot water from 10°C to 50°C	Domestic hot water	Nom.	kWh	2.54 (4)	3.09 (4)	2.54 (4)	3.09 (4)	2.54 (4)	3.09 (4)
		Heat up time from 10°C to 50°C	hr	1h 51min	2h 10min	1h 51min	2h 10min	1h 51min	2h 10min
COP				5.10 (2)					
Pump	Type	Grundfos UPM3 K							
Pump Additional Zone	Nominal Heating ESP unit	kPa		44.9 (5)					
Pump Main Zone	Nominal Heating ESP unit	kPa		50.0 (5)					
Water side Heat exchanger	Water flow rate	Heating	Nom.	l/min		18.3 (2)			
General	Supplier/Manufacturer details	Name and address		Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium					
		Name or trademark		Daikin Europe N.V.					
	Product description	Air-to-water heat pump		Yes					
		Brine-to-water heat pump		No					
		Heat pump combination heater		Yes					
		Low-temperature heat pump		No					
		Supplementary heater integrated		Yes					
	Water-to-water heat pump		No						
LW(A) Sound power level (according to EN14825)	Indoor	dB(A)		44.0					
LW(A) Sound power level (according to EN14825)	Outdoor	dB(A)		53.0					
Sound condition Ecodesign and energy label				Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825					
Tank	Name	Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L
Space heating general	Air to water unit	Rated airflow (outdoor)	m ³ /h	3,542					
	Other	Capacity control		Inverter					
		Pck (Crankcase heater mode) kW		0.000					
		Poff (Off mode) kW		0.027					
		Psb (Standby mode) kW		0.027					
	Pto (Thermostat off) kW		0.024						
Domestic hot water heating	General	Declared load profile		L					
Space heating general	Integrated supplementary heater	Psup	kW	9.0					
		Type of energy input		Electrical					

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETVZ12S18E9W + EPRA08EW1	ETVZ12S23E9W + EPRA08EW1	ETVZ12S18E9W + EPRA10EW1	ETVZ12S23E9W + EPRA10EW1	ETVZ12S18E9W + EPRA12EW1	ETVZ12S23E9W + EPRA12EW1		
Domestic hot water heating	Average climate	AEC (Annual electricity consumption)	kWh	851	787	851	787	851	787		
		COPdhw		2.80	3.05	2.80	3.05	2.80	3.05		
		Heat up time		1h 57min	2h 14min	1h 57min	2h 14min	1h 57min	2h 14min		
		ηwh (water heating efficiency)	%	120	130	120	130	120	130		
		Qelec (Daily electricity consumption)	kWh	4.160	3.830	4.160	3.830	4.160	3.830		
		Reference hot water temperature	°C	53.0	52.0	53.0	52.0	53.0	52.0		
		Stand-by power input	W	50.7	43.9	50.7	43.9	50.7	43.9		
		Water heating energy efficiency class		A+							
		Cold climate	Average climate	AEC (Annual electricity consumption)	kWh	937	866	937	866	937	866
				COPdhw		2.55	2.77	2.55	2.77	2.55	2.77
Heat up time				1h 55min	2h 02min	1h 55min	2h 02min	1h 55min	2h 02min		
ηwh (water heating efficiency)	%			109	118	109	118	109	118		
Qelec (Daily electricity consumption)	kWh			4.570	4.200	4.570	4.200	4.570	4.200		
Reference hot water temperature	°C			53.0	52.0	53.0	52.0	53.0	52.0		
Stand-by power input	W			54.3	46.7	54.3	46.7	54.3	46.7		
Warm climate	Average climate			AEC (Annual electricity consumption)	kWh	699	648	699	648	699	648
		COPdhw		3.40	3.68	3.40	3.68	3.40	3.68		
		Heat up time		1h 54min	2h 06min	1h 54min	2h 06min	1h 54min	2h 06min		
		ηwh (water heating efficiency)	%	147	158	147	158	147	158		
		Qelec (Daily electricity consumption)	kWh	3.430	3.160	3.430	3.160	3.430	3.160		
		Reference hot water temperature	°C	53.0	52.0	53.0	52.0	53.0	52.0		
		Stand-by power input	W	44.6	39.0	44.6	39.0	44.6	39.0		
		Space heating	Average climate water outlet 55°C	General	Annual energy consumption	kWh	4,993		4,970		
ηs (Seasonal space heating efficiency)	%				138						
Prated at -10°C	Qhe Annual energy consumption (GCV)			Gj			8.5			18	
	SCOP				3.52		3.53				
Seasonal space heating eff. class					A++						
	A Condition (7°CDB/-8°CWB)			Cdh (Degradation heating)		1.0					
A Condition (7°CDB/-8°CWB)	COPd				2.30						
				Pdh	kW	7.6					
				PERd	%	91.9					
B Condition (2°CDB/-1°CWB)	COPd				3.50						
				Pdh	kW	4.6					
				PERd	%	140.0					
C Condition (7°CDB/-6°CWB)	Cdh (Degradation heating)				1.0						

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVZ12S18E9W + EPRA08EW1	ETVZ12S23E9W + EPRA08EW1	ETVZ12S18E9W + EPRA10EW1	ETVZ12S23E9W + EPRA10EW1	ETVZ12S18E9W + EPRA12EW1	ETVZ12S23E9W + EPRA12EW1	
Space heating	Average climate water outlet 55°C	C Condition (7°CDB/6°CWB)	COPd					4.61		
			Pdh	kW				3.0		
			PERd	%				184.2		
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)					1.0		
			COPd					6.16		
			Pdh	kW				3.7		
		Tol (temperature operating limit)	TOL	PERd	%				246.4	
				COPd		2.01			2.05	
				Pdh	kW	7.0			8.3	
	Rated heat output supplementary capacity	WTOL	PERd	%	80.2			82.1		
			TOL	°C				-10		
			WTOL	°C				55		
	Cold climate water outlet 55°C	General	Annual energy consumption	Psup (at Tdesign -10°C)	kW	1.5			0.0	
				Tbiv	°C					
			ηs (Seasonal space heating efficiency)	COPd		2.30			2.05	
				Pdh	kW	7.6			8.3	
			Prated at -22°C	PERd	%	91.9			82.1	
				Tbiv	°C	-7			-10	
A Condition (7°CDB/6°CWB)		Annual energy consumption	Cdh (Degradation heating)	Annual energy consumption	kWh	7,088		6,950	6,921	
				ηs (Seasonal space heating efficiency)	%	122		125		
		Qhe Annual energy consumption (GCV)	Cdh (Degradation heating)	Prated at -22°C	kW			9.0		
				Qhe Annual energy consumption (GCV)	Gj	26		25		
		B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)	COPd				1.0		
				Pdh	kW			2.61		
PERd				%	104.2		104.4			
C Condition (7°CDB/6°CWB)		Cdh (Degradation heating)	COPd				1.0			
			Pdh	kW			3.90			
			PERd	%			3.3		156.0	
D Condition (12°CDB/11°CWB)		Cdh (Degradation heating)	COPd				1.0			
			Pdh	kW			4.96			
	PERd		%			3.4		198.3		
Tol (temperature operating limit)	TOL	COPd	Pdh	kW			6.56			
			PERd	%			4.2			
			TOL	°C			262.5			
Tol (temperature operating limit)	TOL	COPd	Pdh	kW			4.2			
			PERd	%			262.5			
			TOL	°C	1.49		1.56	1.62		

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETVZ12S18E9W + EPRA08EW1	ETVZ12S23E9W + EPRA08EW1	ETVZ12S18E9W + EPRA10EW1	ETVZ12S23E9W + EPRA10EW1	ETVZ12S18E9W + EPRA12EW1	ETVZ12S23E9W + EPRA12EW1	
Space heating Cold climate water outlet 55°C	Tol (tem- perature operat- ing limit)	Pdh	kW	4.9		6.1		7.2		
		PERd	%	59.6		62.3		64.7		
		TOL	°C			-22				
		WTOL	°C			55				
	G Con- dition (-15°CDB/-)	COPd		2.00			2.03			
		Pdh	kW	6.0			7.2			
		PERd	%	80.0			81.2			
		Tbiv	COPd		2.25			2.03		
	(bivalent tempera- ture)	Pdh	kW	6.6			7.2			
		PERd	%	90.0			81.2			
		Tbiv	°C	-12			-15			
	Rated heat output supple- mentary capacity	Psup (at Tdesign -22°C)	kW	4.1		2.9		1.8		
	Warm climate water outlet 55°C	General	Annual energy consumption	kWh			2,972			
			ηs (Seasonal space heating efficiency)	%			170			
Prated at 2°C			kW			9.6				
Qhe Annual ener- gy consumption (GCV)			Gj			11				
B Con- dition (2°CDB- B/1°CWB)		Cdh (Degradation heating)				1.0				
		COPd				2.66				
		Pdh	kW			8.0				
C Con- dition (7°CDB- B/6°CWB)		Cdh (Degradation heating)				1.0				
		COPd				3.79				
		Pdh	kW			6.7				
D Condition (12°CDB/11°CWB)		Cdh (Degradation heating)				1.0				
		COPd				5.87				
		Pdh	kW			3.6				
Tbiv (bivalent tempera- ture)		PERd	%			234.9				
	Tbiv	°C			4					
	COPd				3.13					
Average climate water outlet 35°C	General	Pdh	kW			8.4				
		PERd	%			125.4				
		Prated at -10°C	kW			8.3				
		Qhe Annual ener- gy consumption (GCV)	Gj			13				
	SCOP			4.81		4.84				

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETVZ12S18E9W + EPRA08EW1	ETVZ12S23E9W + EPRA08EW1	ETVZ12S18E9W + EPRA10EW1	ETVZ12S23E9W + EPRA10EW1	ETVZ12S18E9W + EPRA12EW1	ETVZ12S23E9W + EPRA12EW1			
Space heating 	Average climate water outlet 35°C	General	Seasonal space heating eff. class	A+++								
		A Condition (7°CDB/-8°CWB)	COPd	3.20								
			Pdh	kW	7.5							
			PERd	%	128.0							
		B Condition (2°CDB/-1°CWB)	Cdh (Degradation heating)	1.0								
			COPd	4.93								
			Pdh	kW	4.4							
			PERd	%	197.2							
		C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)	1.0								
			COPd	6.37								
			Pdh	kW	4.3							
			PERd	%	254.8							
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)	1.0								
			COPd	8.13								
			Pdh	kW	6.6							
			PERd	%	325.2							
		Tol (temperature operating limit)	COPd			2.90			2.86			
			Pdh	kW			6.9			8.1		
			PERd	%			116.0			114.4		
			TOL	°C	-10							
	WTOL	°C	35									
Tbiv (bivalent temperature)	COPd			3.20			2.86					
	Pdh	kW			7.5			8.1				
	PERd	%			128.0			114.4				
	Tbiv	°C	-7									
Rated heat output supplementary capacity	Psup (at Tdesign -10°C)	kW			1.4			0.0				
Cold climate water outlet 35°C	General	Annual energy consumption	kWh	5,394		5,239		5,224				
		ηs (Seasonal space heating efficiency)	%	162		166		167				
		Prated at -22°C	kW	9.0								
		Qhe Annual energy consumption (GCV)	Gj	19								
		A Condition (7°CDB/-8°CWB)	COPd	3.48								
			Pdh	kW	5.4							
			PERd	%	139.2							
		B Condition (2°CDB/-1°CWB)	Cdh (Degradation heating)	1.0								
			COPd	5.40								
			Pdh	kW	3.6							
	PERd	%	216.0									

2 Specifications

1 - 1 EPRA08-12EW

2



Technical specifications				ETVZ12S18E9W + EPRA08EW1	ETVZ12S23E9W + EPRA08EW1	ETVZ12S18E9W + EPRA10EW1	ETVZ12S23E9W + EPRA10EW1	ETVZ12S18E9W + EPRA12EW1	ETVZ12S23E9W + EPRA12EW1		
Space heating	Cold climate water outlet 35°C	C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)						1.0		
			COPd						6.53		
		Pdh	kW							5.3	
			PERd	%						261.2	
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)							1.0	
			COPd							7.98	
		Pdh	kW							6.6	
			PERd	%		319.0			319.2		
		Tol (temperature operating limit)	WTOL	COPd	°C	2.11		2.14			2.16
				Pdh	kW	4.9		5.9			6.5
	PERd	%		84.3			85.6			86.4	
		TOL	°C							-22	
	G Condition (-15°CDB/-)	WTOL	COPd	°C						35	
			Pdh	kW	2.68				2.64		
	PERd	%		107.1					105.6		
		Tbiv	COPd		2.95				2.64		
	(bivalent temperature)	Tbiv	Pdh	kW	6.5				7.0		
			PERd	%	118.1				105.6		
	Rated heat output supplementary capacity	Tbiv	Tbiv	°C	-12				-15		
			Psup (at Tdesign -22°C)	kW	4.1		3.1			2.6	
Warm climate water outlet 35°C	General	Annual energy consumption	kWh						1,954		
			ηs (Seasonal space heating efficiency)	%					232		
		Prated at 2°C	kW						8.6		
		Qhe Annual energy consumption (GCV)	Gj						7		
	B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)	COPd						1.0		
			COPd						4.07		
	Pdh	kW							7.7		
		PERd	%						162.9		
	C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)	COPd						1.0		
			COPd						5.85		
Pdh	kW							5.5			
	PERd	%						234.1			
Tbiv	Tbiv	COPd						4.97			
		Pdh	kW					6.9			
(bivalent temperature)	Tbiv	PERd	%					198.9			
		Tbiv	°C					5			
Space heating	Warm climate water outlet	D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)						1.0		
			COPd						7.85		
		Pdh	kW							6.2	
			PERd	%						313.9	

(1)Capacity according to standard EN14511 and valid for heated water range dT = 3~8°C at Ta 7°C |
 (2)Condition: Ta DB/WB 7°C/6°C - LWC 35°C. (DT = 5°C) |
 (3)Power input is total input of indoor and outdoor units, including the circulation pump; according to EN14511 |
 (4)Test at Ta DB/WB 7°C/6°C. According to EN 16147. |
 (5)DB/WB 7°C/6°C - LWC 35°C (dT=5°C) with pump at full speed |
 Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB |
 Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB

Technical specifications				ETSH12P30E + EPRA08EW1	ETSH12P50E + EPRA08EW1	ETSH12P30E + EPRA10EW1	ETSH12P50E + EPRA10EW1	ETSH12P30E + EPRA12EW1	ETSH12P50E + EPRA12EW1
Indoor unit				ETSH12P30EF	ETSH12P50EF	ETSH12P30EF	ETSH12P50EF	ETSH12P30EF	ETSH12P50EF
Outdoor unit				EPRA08EAW1		EPRA10EAW1		EPRA12EAW1	
Heating capacity	Nom.		kW	6.17 (1)					
Power input	Heating	Nom.	kW	1.21 (1)					
COP				5.10 (1)					
Pump	Type	Grundfos UPM3L K 20-75 CHBL AZA 3 RT							
	Nominal Heating ESP unit		kPa	53.5 (2)					
Water side Heat exchanger	Water flow rate	Heating	Nom.	17.7 (1)					

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications			ETSH12P30E + EPRA08EW1	ETSH12P50E + EPRA08EW1	ETSH12P30E + EPRA10EW1	ETSH12P50E + EPRA10EW1	ETSH12P30E + EPRA12EW1	ETSH12P50E + EPRA12EW1			
General	Supplier/Manu- facturer details	Name and address	Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium								
		Name or trademark	Daikin Europe N.V.								
	Product descrip- tion	Air-to-water heat pump					Yes				
		Brine-to-water heat pump					No				
		Heat pump combination heater					Yes				
		Low-temperature heat pump					No				
		Supplementary heater integrated					No				
		Water-to-water heat pump					No				
	LW(A) Sound power level (according to EN14825)	Indoor	dB(A)				47.3				
	LW(A) Sound power level (according to EN14825)	Outdoor	dB(A)				53.0				
Sound condition Ecodesign and energy label			Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825								
Space heating general	Air to water unit	Rated airflow (outdoor)	m ³ /h		3,542						
	Other	Capacity control	Inverter								
		Pck (Crankcase heater mode) kW	0.000								
		Poff (Off mode) kW	0.027								
		Psb (Standby mode) kW	0.027								
		Pto (Thermostat off) kW	0.024								
Domestic hot water heating 	General	Declared load profile	L								
		Function to fix water heating during off peak hours	No								
	Average climate	AEC (Annual electricity consumption)	kWh	858	1,281	858	1,281	858	1,281		
		COPdhw		2.83	3.17	2.83	3.17	2.83	3.17		
		Heat up time		2h 29min	3h 13min	2h 29min	3h 13min	2h 29min	3h 13min		
		Mixed water at 40°C	l	194.0	246.0	194.0	246.0	194.0	246.0		
		η _{wh} (water heating efficiency)	%	119	131	119	131	119	131		
		Qelec (Daily electricity consumption)	kWh	4.116	6.008	4.116	6.008	4.116	6.008		
		Reference hot water temperature	°C	47.2	44.5	47.2	44.5	47.2	44.5		
		Stand-by power input	W	37.4	32.1	37.4	32.1	37.4	32.1		
		Water heating energy efficiency class		A+							
		Domestic hot water heating 	Cold climate	AEC (Annual electricity consumption)	kWh	1,152	1,485	1,152	1,485	1,152	1,485
				COPdhw		2.12	2.74	2.12	2.74	2.12	2.74
				Heat up time		2h 23min	3h 36min	2h 23min	3h 36min	2h 23min	3h 36min
Mixed water at 40°C	l			175.0	246.0	175.0	246.0	175.0	246.0		
η _{wh} (water heating efficiency)	%			89	113	89	113	89	113		
Qelec (Daily electricity consumption)	kWh			5.498	6.961	5.498	6.961	5.498	6.961		
Reference hot water temperature	°C		46.3	44.5	46.3	44.5	46.3	44.5			
Stand-by power input	W		45.5	35.9	45.5	35.9	45.5	35.9			
Warm climate	AEC (Annual electricity consumption)		kWh	759	1,109	759	1,109	759	1,109		
	COPdhw			3.19	3.65	3.19	3.65	3.19	3.65		
	Heat up time			2h 19min	3h 24min	2h 19min	3h 24min	2h 19min	3h 24min		
	Mixed water at 40°C		l	194.0	246.0	194.0	246.0	194.0	246.0		
	η _{wh} (water heating efficiency)	%	135	151	135	151	135	151			
	Qelec (Daily electricity consumption)	kWh	3.652	5.219	3.652	5.219	3.652	5.219			
Reference hot water temperature	°C	47.2	44.5	47.2	44.5	47.2	44.5				
Stand-by power input	W	35.2	30.7	35.2	30.7	35.2	30.7				

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETSH12P30E + EPRA08EW1	ETSH12P50E + EPRA08EW1	ETSH12P30E + EPRA10EW1	ETSH12P50E + EPRA10EW1	ETSH12P30E + EPRA12EW1	ETSH12P50E + EPRA12EW1
Space heating	Average climate water outlet 55°C	General	Annual energy consumption kWh	4,993		4,970			
			ηs (Seasonal space heating efficiency) %	138					
			Prated at -10°C kW	9					
			Qhe Annual energy consumption (GCV) GJ	18					
			SCOP	3.52		3.53			
			Seasonal space heating eff. class	A++					
		A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)	1.0					
			COPd	2.30					
			Pdh kW	7.6					
			PERd %	92.0					
		B Condition (2°CDB/-1°CWB)	Cdh (Degradation heating)	1.0					
			COPd	3.50					
			Pdh kW	4.6					
			PERd %	140.0					
		C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)	1.0					
			COPd	4.61					
			Pdh kW	3.0					
			PERd %	184.4					
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)	1.0					
			COPd	6.16					
			Pdh kW	3.7					

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETSH12P30E + EPRA08EW1	ETSH12P50E + EPRA08EW1	ETSH12P30E + EPRA10EW1	ETSH12P50E + EPRA10EW1	ETSH12P30E + EPRA12EW1	ETSH12P50E + EPRA12EW1	
Space heating 	Average climate water outlet 55°C	D Condition (12°CDB/11°CWB)	PERd	%	246.4					
		Tol (temperature operating limit)	COPd		2.01				2.05	
			Pdh	kW	7.0				8.3	
			PERd	%	80.4				82.0	
			TOL	°C					-10	
			WTOL	°C					55	
	Rated heat output supplementary capacity		Rated heat output supplementary capacity	Psup (at Tdesign -10°C)	kW	1.5			0.0	
		Tbiv (bivalent temperature)		COPd		2.30			2.05	
				Pdh	kW	7.6			8.3	
			PERd	%	92.0				82.0	
			Tbiv	°C	-7				-10	
		Cold climate water outlet 55°C	General		Annual energy consumption	kWh	7,088		6,950	
	ηs (Seasonal space heating efficiency)			%	122				125	
	Prated at -22°C			kW				9		
	Qhe Annual energy consumption (GCV)			Gj	26			25		
A Condition (-7°CDB/-8°CWB)			Cdh (Degradation heating)					1.0		
			COPd					2.61		
			Pdh	kW				5.3		
B Condition (2°CDB/1°CWB)			Cdh (Degradation heating)					1.0		
			COPd					3.90		
			Pdh	kW				3.3		
C Condition (7°CDB/6°CWB)		Cdh (Degradation heating)					1.0			
		COPd					4.96			
		Pdh	kW				3.5			
D Condition (12°CDB/11°CWB)		COPd					6.56			
		Pdh	kW				4.2			
		PERd	%				262.4			
Tol (temperature operating limit)		COPd			1.49		1.56		1.62	
		Pdh	kW		4.9		6.1		7.2	
		PERd	%		59.6		62.4		64.8	
		TOL	°C					-22		
		WTOL	°C					55		
G Condition (-15°CDB/-)		COPd			2.00			2.03		
		Pdh	kW		6.1			7.2		

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETSH12P30E + EPRA08EW1	ETSH12P50E + EPRA08EW1	ETSH12P30E + EPRA10EW1	ETSH12P50E + EPRA10EW1	ETSH12P30E + EPRA12EW1	ETSH12P50E + EPRA12EW1	
Space heating Cold climate water outlet 55°C	G Condition (-15°CDB/-)	PERd	%	80.0		81.2				
		Tbiv	COPd	2.25		2.03				
	(bivalent tempera- ture)	Pdh	kW	6.6		7.2				
		PERd	%	90.0		81.2				
	Tbiv	°C	-12		-15					
	Rated heat output supple- mentary capacity	Psup (at Tdesign -22°C)	kW	4.1		3.0		1.8		
		General			Annual energy consumption		2,972			
	Warm climate water outlet 55°C	General	ηs (Seasonal space heating efficiency)	%	170					
			Prated at 2°C	kW	10					
		Qhe Annual ener- gy consumption (GCV)	Gj	11						
B Con- dition (2°CDB- B/1°CWB)		Cdh (Degradation heating)		1.0						
		COPd		2.66						
Pdh		kW	8.0							
PERd		%	106.4							
C Con- dition (7°CDB- B/6°CWB)		Cdh (Degradation heating)		1.0						
		COPd		3.79						
Pdh		kW	6.7							
PERd	%	151.6								
D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0							
	COPd		5.87							
Pdh	kW	3.6								
PERd	%	234.8								
Tbiv (bivalent tempera- ture)	COPd		3.13							
	Pdh	kW	8.4							
PERd	%	125.2								
Tbiv	°C	4								
Average climate water outlet 35°C	General	Annual energy consumption	kWh	3,561		3,539				
		ηs (Seasonal space heating efficiency)	%	190		191				
	Prated at -10°C	kW	8							
	Qhe Annual ener- gy consumption (GCV)	Gj	13							
	SCOP		4.81		4.84					
	Seasonal space heating eff. class		A+++							
	A Condition (7°CDB/-8°CWB)	COPd		3.20						
		Pdh	kW	7.5						
	PERd	%	128.0							
	B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)		1.0						
COPd			4.93							

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETSH12P30E + EPRA08EW1	ETSH12P50E + EPRA08EW1	ETSH12P30E + EPRA10EW1	ETSH12P50E + EPRA10EW1	ETSH12P30E + EPRA12EW1	ETSH12P50E + EPRA12EW1	
Space heating 	Average climate water outlet 35°C	B Condition (2°CDB/1°CWB)	Pdh	kW					4.4	
			PERd	%					197.2	
		C Condition (7°CDB/6°CWB)	Cd _h (Degradation heating)						1.0	
			COP _d						6.37	
			Pdh	kW					4.3	
			PERd	%					254.8	
		D Condition (12°CDB/11°CWB)	Cd _h (Degradation heating)						1.0	
			COP _d						8.13	
			Pdh	kW					6.6	
		Tol (temperature operating limit)	COP _d			2.90				2.86
	Pdh		kW	6.9				8.1		
	PERd		%	116.0				114.4		
	TOL		°C					-10		
	WTOL		°C					35		
	T _{biv} (bivalent temperature)	COP _d			3.20				2.86	
		Pdh		kW	7.5				8.1	
		PERd		%	128.0				114.4	
		T _{biv}		°C	-7				-10	
		Rated heat output supplementary capacity		P _{sup} (at T _{design} -10°C)	kW	1.4				0.0
	Cold climate water outlet 35°C	General	Annual energy consumption		kWh	5,394		5,239		5,224
η _s (Seasonal space heating efficiency)			%	162		166		167		
Prated at -22°C			kW				9			
Q _{he} Annual energy consumption (GCV)			Gj				19			
A Condition (-7°CDB/-8°CWB)			COP _d				3.48			
B Condition (2°CDB/1°CWB)		Cd _h (Degradation heating)						1.0		
		COP _d						5.40		
		Pdh	kW					3.6		
C Condition (7°CDB/6°CWB)		Cd _h (Degradation heating)						1.0		
		COP _d						6.53		
		Pdh	kW					5.3		
D Condition (12°CDB/11°CWB)		Cd _h (Degradation heating)						1.0		
		COP _d						7.98		
		PERd		%				261.2		

2 Specifications

1 - 1 EPRA08-12EW

2



Technical specifications				ETSH12P30E + EPRA08EW1	ETSH12P50E + EPRA08EW1	ETSH12P30E + EPRA10EW1	ETSH12P50E + EPRA10EW1	ETSH12P30E + EPRA12EW1	ETSH12P50E + EPRA12EW1	
Space heating Cold climate water outlet 35°C	D Condition (12°CDB/11°CWB)	Pdh	kW	6.6						
		PERd	%	319.2						
		Tol (temperature)	COPd		2.11		2.14		2.16	
	operating limit)	Pdh	kW	4.9						
		PERd	%	84.4						
		TOL	°C	-22						
	G Con- dition (-15°CDB/-)	WTOL	°C	35						
		COPd		2.68				2.64		
		Pdh	kW	6.0				7.0		
	Tbiv (bivalent tempera- ture)	PERd	%	107.2				105.6		
		COPd		2.95				2.64		
		Pdh	kW	6.5				7.0		
	Rated heat output supple- mentary capacity	PERd	%	118.0				105.6		
		Tbiv	°C	-12				-15		
		Psup (at Tdesign -22°C)	kW	4.1		3.1				2.6
Warm climate water outlet 35°C	General	Annual energy consumption	kWh	1,954						
		ηs (Seasonal space heating efficiency)	%	232						
		Prated at 2°C	kW	9						
		Qhe Annual energy consumption (GCV)	Gj	7						
	B Con- dition (2°CDB- B/1°CWB)	Cdh (Degradation heating)		1.0						
		COPd		4.07						
		Pdh	kW	7.7						
	C Con- dition (7°CDB- B/6°CWB)	PERd	%	162.8						
		Cdh (Degradation heating)		1.0						
		COPd		5.85						
Tbiv (bivalent tempera- ture)	Pdh	kW	5.5							
	PERd	%	234.0							
	Tbiv	°C	4.97							
D Condition (12°CDB/11°CWB)	Pdh	kW	6.9							
	PERd	%	198.8							
	Tbiv	°C	5							
	Cdh (Degradation heating)		1.0							
	COPd		7.85							
	Pdh	kW	6.2							
	PERd	%	314.0							

(1)Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) |
 (2)DB/WB 7°C/6°C - LWC 35°C (dT=5°C) with pump at full speed |
 Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) |
 Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C)

Technical specifications				ETSHB12P30E + EPRA08EW1	ETSHB12P50E + EPRA08EW1	ETSHB12P30E + EPRA10EW1	ETSHB12P50E + EPRA10EW1	ETSHB12P30E + EPRA12EW1	ETSHB12P50E + EPRA12EW1
Indoor unit				ETSHB12P30EF	ETSHB12P50EF	ETSHB12P30EF	ETSHB12P50EF	ETSHB12P30EF	ETSHB12P50EF
Outdoor unit				EPRA08EAW1		EPRA10EAW1		EPRA12EAW1	
Heating capacity	Nom.			6.17 (1)					
Power input	Heating	Nom.	kW	1.21 (1)					
COP				5.10 (1)					
Pump	Type				Grundfos UPM3L K 20-75 CHBL AZA 3 RT				
	Nominal ESP unit	Heating	kPa	53.5 (2)					
Water side Heat exchanger	Water flow rate	Heating	Nom.	17.7 (1)					

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications			ETSHB12P30E + EPRA08EW1	ETSHB12P50E + EPRA08EW1	ETSHB12P30E + EPRA10EW1	ETSHB12P50E + EPRA10EW1	ETSHB12P30E + EPRA12EW1	ETSHB12P50E + EPRA12EW1			
General	Supplier/Manufacturer details	Name and address	Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium								
		Name or trademark	Daikin Europe N.V.								
	Product description	Air-to-water heat pump		Yes							
		Brine-to-water heat pump		No							
		Heat pump combination heater		Yes							
		Low-temperature heat pump		No							
		Supplementary heater integrated		No							
	LW(A) Sound power level (according to EN14825)	Indoor	dB(A)	47.3							
		Outdoor	dB(A)	53.0							
	Sound condition Ecodesign and energy label			Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825							
Space heating general	Air to water unit	Rated airflow (outdoor)	m ³ /h 3,542								
	Other	Capacity control	Inverter								
		Pck (Crankcase heater mode) kW	0.000								
		Poff (Off mode) kW	0.027								
		Psb (Standby mode) kW	0.027								
		Pto (Thermostat off) kW	0.024								
Domestic hot water heating 	General	Declared load profile	L								
		Function to fix water heating during off peak hours	No								
	Average climate	AEC (Annual electricity consumption)	kWh	858	1,281	858	1,281	858	1,281		
		COPdhw		2.83	3.17	2.83	3.17	2.83	3.17		
		Heat up time		2h 29min	3h 13min	2h 29min	3h 13min	2h 29min	3h 13min		
		Mixed water at 40°C	l	194.0	246.0	194.0	246.0	194.0	246.0		
		η _{wh} (water heating efficiency)	%	119	131	119	131	119	131		
		Qelec (Daily electricity consumption)	kWh	4.116	6.008	4.116	6.008	4.116	6.008		
		Reference hot water temperature	°C	47.2	44.5	47.2	44.5	47.2	44.5		
		Stand-by power input	W	37.4	32.1	37.4	32.1	37.4	32.1		
		Water heating energy efficiency class		A+							
		Domestic hot water heating 	Cold climate	AEC (Annual electricity consumption)	kWh	1,152	1,485	1,152	1,485	1,152	1,485
				COPdhw		2.12	2.74	2.12	2.74	2.12	2.74
				Heat up time		2h 23min	3h 36min	2h 23min	3h 36min	2h 23min	3h 36min
Mixed water at 40°C	l			175.0	246.0	175.0	246.0	175.0	246.0		
η _{wh} (water heating efficiency)	%			89	113	89	113	89	113		
Qelec (Daily electricity consumption)	kWh			5.498	6.961	5.498	6.961	5.498	6.961		
Warm climate	Reference hot water temperature		°C	46.3	44.5	46.3	44.5	46.3	44.5		
	Stand-by power input		W	45.5	35.9	45.5	35.9	45.5	35.9		
	AEC (Annual electricity consumption)		kWh	759	1,109	759	1,109	759	1,109		
	COPdhw			3.19	3.65	3.19	3.65	3.19	3.65		
	Heat up time			2h 19min	3h 24min	2h 19min	3h 24min	2h 19min	3h 24min		
	Mixed water at 40°C		l	194.0	246.0	194.0	246.0	194.0	246.0		
	η _{wh} (water heating efficiency)		%	135	151	135	151	135	151		
	Qelec (Daily electricity consumption)		kWh	3.652	5.219	3.652	5.219	3.652	5.219		
Reference hot water temperature	°C	47.2	44.5	47.2	44.5	47.2	44.5				
Stand-by power input	W	35.2	30.7	35.2	30.7	35.2	30.7				

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETSHB12P30E + EPRA08EW1	ETSHB12P50E + EPRA08EW1	ETSHB12P30E + EPRA10EW1	ETSHB12P50E + EPRA10EW1	ETSHB12P30E + EPRA12EW1	ETSHB12P50E + EPRA12EW1
Space heating	Average climate water outlet 55°C	General	Annual energy consumption kWh	4,993		4,970			
			ηs (Seasonal space heating efficiency) %	138					
			Prated at -10°C kW	9					
			Qhe Annual energy consumption (GCV) GJ	18					
			SCOP	3.52		3.53			
			Seasonal space heating eff. class	A++					
		A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)	1.0					
			COPd	2.30					
			Pdh kW	7.6					
			PERd %	92.0					
		B Condition (2°CDB/-1°CWB)	Cdh (Degradation heating)	1.0					
			COPd	3.50					
			Pdh kW	4.6					
			PERd %	140.0					
		C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)	1.0					
			COPd	4.61					
			Pdh kW	3.0					
			PERd %	184.4					
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)	1.0					
			COPd	6.16					
			Pdh kW	3.7					

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETSHB12P30E + EPRA08EW1	ETSHB12P50E + EPRA08EW1	ETSHB12P30E + EPRA10EW1	ETSHB12P50E + EPRA10EW1	ETSHB12P30E + EPRA12EW1	ETSHB12P50E + EPRA12EW1	
Space heating 	Average climate water outlet 55°C	D Condition (12°CDB/11°CWB)	PERd	%	246.4					
		Tol (temperature operating limit)	COPd		2.01				2.05	
			Pdh	kW	7.0				8.3	
			PERd	%	80.4				82.0	
			TOL	°C				-10		
			WTOL	°C				55		
	Rated heat output supplementary capacity	Psup (at Tdesign -10°C)	kW	1.5					0.0	
		Tbiv (bivalent temperature)	COPd	2.30					2.05	
			Pdh	kW	7.6				8.3	
			PERd	%	92.0				82.0	
			Tbiv	°C	-7				-10	
		Cold climate water outlet 55°C	General	Annual energy consumption	kWh	7,088		6,950		
ηs (Seasonal space heating efficiency)	%			122				125		
Prated at -22°C	kW						9			
Qhe Annual energy consumption (GCV)	Gj			26				25		
A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)						1.0			
	COPd						2.61			
	Pdh		kW				5.3			
	PERd		%				104.4			
B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)						1.0			
	COPd						3.90			
	Pdh		kW				3.3			
C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)						1.0			
	COPd					4.96				
	Pdh	kW				3.5				
D Condition (12°CDB/11°CWB)	COPd					6.56				
	Pdh	kW				4.2				
	PERd	%				262.4				
Tol (temperature operating limit)	COPd		1.49			1.56			1.62	
	Pdh	kW	4.9			6.1			7.2	
	PERd	%	59.6			62.4			64.8	
	TOL	°C				-22				
	WTOL	°C				55				
G Condition (-15°CDB/-)	COPd		2.00					2.03		
	Pdh	kW	6.1					7.2		

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETSHB12P30E + EPRA08EW1	ETSHB12P50E + EPRA08EW1	ETSHB12P30E + EPRA10EW1	ETSHB12P50E + EPRA10EW1	ETSHB12P30E + EPRA12EW1	ETSHB12P50E + EPRA12EW1	
Space heating Cold climate water outlet 55°C	G Condition (-15°CDB/-)	PERd	%	80.0		81.2				
		Tbiv	COPd	2.25		2.03				
	(bivalent tempera- ture)	Pdh	kW	6.6		7.2				
		PERd	%	90.0		81.2				
	Tbiv	°C	-12		-15					
	Rated heat output supple- mentary capacity	Psup (at Tdesign -22°C)	kW	4.1		3.0		1.8		
		General			Annual energy consumption		2,972			
	Warm climate water outlet 55°C	General	ηs (Seasonal space heating efficiency)	%	170					
			Prated at 2°C	kW	10					
		Qhe Annual ener- gy consumption (GCV)	Gj	11						
B Con- dition (2°CDB- B/1°CWB)		Cdh (Degradation heating)		1.0						
		COPd		2.66						
Pdh		kW	8.0							
PERd		%	106.4							
C Con- dition (7°CDB- B/6°CWB)		Cdh (Degradation heating)		1.0						
		COPd		3.79						
Pdh		kW	6.7							
PERd	%	151.6								
D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0							
	COPd		5.87							
Pdh	kW	3.6								
PERd	%	234.8								
Tbiv (bivalent tempera- ture)	COPd		3.13							
	Pdh	kW	8.4							
PERd	%	125.2								
Tbiv	°C	4								
Average climate water outlet 35°C	General	Annual energy consumption	kWh	3,561		3,539				
		ηs (Seasonal space heating efficiency)	%	190		191				
	Prated at -10°C	kW	8							
	Qhe Annual ener- gy consumption (GCV)	Gj	13							
	SCOP		4.81		4.84					
	Seasonal space heating eff. class			A+++						
	A Condition (7°CDB/-8°CWB)	COPd		3.20						
		Pdh	kW	7.5						
	PERd	%	128.0							
	B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)		1.0						
COPd			4.93							

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETSHB12P30E + EPRA08EW1	ETSHB12P50E + EPRA08EW1	ETSHB12P30E + EPRA10EW1	ETSHB12P50E + EPRA10EW1	ETSHB12P30E + EPRA12EW1	ETSHB12P50E + EPRA12EW1	
Space heating 	Average climate water outlet 35°C	B Condition (2°CDB/1°CWB)	Pdh	kW					4.4	
			PERd	%					197.2	
		C Condition (7°CDB/6°CWB)	Cd _h (Degradation heating)						1.0	
			COP _d						6.37	
			Pdh	kW					4.3	
			PERd	%					254.8	
		D Condition (12°CDB/11°CWB)	Cd _h (Degradation heating)						1.0	
			COP _d						8.13	
			Pdh	kW					6.6	
		Tol (temperature operating limit)	COP _d			2.90				2.86
	Pdh		kW	6.9				8.1		
	PERd		%	116.0				114.4		
	TOL		°C					-10		
	WTOL		°C					35		
	Tbiv (bivalent temperature)	COP _d			3.20				2.86	
		Pdh		kW	7.5				8.1	
		PERd		%	128.0				114.4	
		Tbiv		°C	-7				-10	
		Rated heat output supplementary capacity		P _{sup} (at T _{design} -10°C)	kW	1.4				0.0
	Cold climate water outlet 35°C	General	Annual energy consumption		kWh	5,394		5,239		5,224
η _s (Seasonal space heating efficiency)			%	162		166		167		
Prated at -22°C			kW				9			
Q _{he} Annual energy consumption (GCV)			Gj				19			
A Condition (-7°CDB/-8°CWB)			COP _d					3.48		
B Condition (2°CDB/1°CWB)		Pdh		kW				5.4		
		PERd		%				139.2		
		Cd _h (Degradation heating)						1.0		
C Condition (7°CDB/6°CWB)		COP _d						5.40		
		Pdh		kW				3.6		
		PERd		%				216.0		
		Cd _h (Degradation heating)						1.0		
D Condition (12°CDB/11°CWB)		COP _d						6.53		
		Pdh		kW				5.3		
		PERd		%				261.2		
Cd _h (Degradation heating)						1.0				
COP _d						7.98				

2 Specifications

1 - 1 EPRA08-12EW

2



Technical specifications					ETSHB12P30E + EPRA08EW1	ETSHB12P50E + EPRA08EW1	ETSHB12P30E + EPRA10EW1	ETSHB12P50E + EPRA10EW1	ETSHB12P30E + EPRA12EW1	ETSHB12P50E + EPRA12EW1	
Space heating	Cold climate water outlet 35°C	D Condition (12°CDB/11°CWB)	Pdh	kW	6.6						
			PERd	%	319.2						
		Tol (temperature operating limit)	COPd		2.11		2.14			2.16	
			Pdh	kW	4.9		5.9			6.5	
			PERd	%	84.4		85.6			86.4	
			TOL	°C			-22				
			WTOL	°C			35				
		G Condition (-15°CDB/-)	COPd		2.68				2.64		
			Pdh	kW	6.0				7.0		
			PERd	%	107.2				105.6		
	Tbiv (bivalent temperature)	COPd		2.95				2.64			
		Pdh	kW	6.5				7.0			
		PERd	%	118.0				105.6			
		Tbiv	°C	-12				-15			
	Rated heat output supplementary capacity	Psup (at Tdesign -22°C)	kW	4.1			3.1			2.6	
	Warm climate water outlet 35°C	General	Annual energy consumption	kWh	1,954						
			ηs (Seasonal space heating efficiency)	%	232						
			Prated at 2°C	kW	9						
			Qhe Annual energy consumption (GCV)	Gj	7						
		B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)		1.0						
COPd				4.07							
Pdh			kW	7.7							
C Condition (7°CDB/6°CWB)		Cdh (Degradation heating)		1.0							
		COPd		5.85							
		Pdh	kW	5.5							
Tbiv (bivalent temperature)	COPd		4.97								
	Pdh	kW	6.9								
	PERd	%	198.8								
D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)		1.0								
	COPd		7.85								
	Pdh	kW	6.2								
	PERd	%	314.0								

(1)Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2)DB/WB 7°C/6°C - LWC 35°C (dT=5°C) with pump at full speed | Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C)

Technical specifications					ETSHX12P30E + EPRA08EW1	ETSHX12P50E + EPRA08EW1	ETSHX12P30E + EPRA10EW1	ETSHX12P50E + EPRA10EW1	ETSHX12P30E + EPRA12EW1	ETSHX12P50E + EPRA12EW1	
Indoor unit					ETSHX12P30EF	ETSHX12P50EF	ETSHX12P30EF	ETSHX12P50EF	ETSHX12P30EF	ETSHX12P50EF	
Outdoor unit					EPRA08EAW1		EPRA10EAW1		EPRA12EAW1		
Heating capacity	Nom.			kW	6.17 (1)		7.97 (2)		8.62 (2)		
Cooling capacity	Nom.			kW	6.81 (2)		7.97 (2)		8.62 (2)		
Power input	Heating	Nom.			kW	1.21 (1)		2.57 (2)		2.86 (2)	
	Cooling	Nom.			kW	2.08 (2)		2.57 (2)		2.86 (2)	
COP					5.10 (1)		3.10 (2)		3.01 (2)		
EER					3.28 (2)		3.10 (2)		3.01 (2)		
Pump	Type					Grundfos UPM3L K 20-75 CHBL AZA 3 RT					
	Nominal ESP unit	Heating			kPa	53.5 (3)					
Water side Heat exchanger	Water flow rate	Cooling	Nom.			l/min	19.5 (2)		24.7 (2)		
		Heating	Nom.			l/min	17.7 (1)				

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications			ETSX12P30E	ETSX12P50E	ETSX12P30E	ETSX12P50E	ETSX12P30E	ETSX12P50E		
			+	+	+	+	+	+		
			EPRA08EW1	EPRA08EW1	EPRA10EW1	EPRA10EW1	EPRA12EW1	EPRA12EW1		
General	Supplier/	Name and address	Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium							
	Manu- facturer details	Name or trademark	Daikin Europe N.V.							
	Product descrip- tion	Air-to-water heat pump		Yes						
		Brine-to-water heat pump		No						
		Heat pump combination heater		Yes						
		Low-temperature heat pump		No						
		Supplementary heater integrated		No						
	LW(A) Sound power level (according to EN14825)	Indoor	dB(A)	47.3						
		Outdoor	dB(A)	53.0						
	Sound condition Ecodesign and energy label			Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825						
Space heating general	Air to water unit	Rated airflow (outdoor)	m ³ /h 3,542							
	Other	Capacity control	Inverter							
		Pck (Crankcase heater mode)	kW	0.000						
		Poff (Off mode)	kW	0.027						
		Psb (Standby mode)	kW	0.027						
		Pto (Thermostat off)	kW	0.024						
Domestic hot water heating 	General	Declared load profile	L							
		Function to fix water heating during off peak hours	No							
	Average climate	AEC (Annual electricity consumption)	kWh	858	1,281	858	1,281	858	1,281	
		COPdhw		2.83	3.17	2.83	3.17	2.83	3.17	
		Heat up time		2h 29min	3h 13min	2h 29min	3h 13min	2h 29min	3h 13min	
		Mixed water at 40°C	l	194.0	246.0	194.0	246.0	194.0	246.0	
		η _{wh} (water heating efficiency)	%	119	131	119	131	119	131	
	Domestic hot water heating 	Average climate	Qelec (Daily electricity consumption)	kWh	4.116	6.008	4.116	6.008	4.116	6.008
			Reference hot water temperature	°C	47.2	44.5	47.2	44.5	47.2	44.5
			Stand-by power input	W	37.4	32.1	37.4	32.1	37.4	32.1
Water heating energy efficiency class				A+						
Cold climate		AEC (Annual electricity consumption)	kWh	1,152	1,485	1,152	1,485	1,152	1,485	
		COPdhw		2.12	2.74	2.12	2.74	2.12	2.74	
		Heat up time		2h 23min	3h 36min	2h 23min	3h 36min	2h 23min	3h 36min	
		Mixed water at 40°C	l	175.0	246.0	175.0	246.0	175.0	246.0	
		η _{wh} (water heating efficiency)	%	89	113	89	113	89	113	
		Qelec (Daily electricity consumption)	kWh	5.498	6.961	5.498	6.961	5.498	6.961	
	Reference hot water temperature	°C	46.3	44.5	46.3	44.5	46.3	44.5		
Warm climate	Stand-by power input	W	45.5	35.9	45.5	35.9	45.5	35.9		
		AEC (Annual electricity consumption)	kWh	759	1,109	759	1,109	759	1,109	
		COPdhw		3.19	3.65	3.19	3.65	3.19	3.65	
		Heat up time		2h 19min	3h 24min	2h 19min	3h 24min	2h 19min	3h 24min	
		Mixed water at 40°C	l	194.0	246.0	194.0	246.0	194.0	246.0	
		η _{wh} (water heating efficiency)	%	135	151	135	151	135	151	
		Qelec (Daily electricity consumption)	kWh	3.652	5.219	3.652	5.219	3.652	5.219	
		Reference hot water temperature	°C	47.2	44.5	47.2	44.5	47.2	44.5	
		Stand-by power input	W	35.2	30.7	35.2	30.7	35.2	30.7	

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETSX12P30E	ETSX12P50E	ETSX12P30E	ETSX12P50E	ETSX12P30E	ETSX12P50E
				+	+	+	+	+	+
				EPRA08EW1	EPRA08EW1	EPRA10EW1	EPRA10EW1	EPRA12EW1	EPRA12EW1
Space heating 	Average climate water outlet 55°C	General	Annual energy consumption kWh	4,894		4,871			
			ηs (Seasonal space heating efficiency) %	141					
			Prated at -10°C kW	9					
			Qhe Annual energy consumption (GCV) GJ	18					
			SCOP	3.59		3.60			
			Seasonal space heating eff. class	A++					
			A Condition (7°CDB/-8°CWB)	CdH (Degradation heating)		1.0			
				COPd		2.30			
				Pdh kW		7.6			
				PERd %		92.0			
			B Condition (2°CDB/-1°CWB)	CdH (Degradation heating)		1.0			
				COPd		3.50			
				Pdh kW		4.6			
				PERd %		140.0			
			C Condition (7°CDB/6°CWB)	CdH (Degradation heating)		1.0			
				COPd		4.61			
	Pdh kW		3.0						

2 Specifications


1 - 1 EPRA08-12EW

Technical specifications				ETSX12P30E	ETSX12P50E	ETSX12P30E	ETSX12P50E	ETSX12P30E	ETSX12P50E		
				+	+	+	+	+	+		
				EPRA08EW1	EPRA08EW1	EPRA10EW1	EPRA10EW1	EPRA12EW1	EPRA12EW1		
Space heating 	Average climate water outlet 55°C	C Condition (7°CDB/6°CWB)	PERd	%	184.4						
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)			1.0					
			COPd			6.16					
			Pdh	kW		3.7					
			PERd	%		246.4					
		Tol (temperature operating limit)	COPd			2.01				2.05	
			Pdh	kW		7.0				8.3	
			PERd	%		80.4				82.0	
			TOL	°C						-10	
		Rated heat output supplementary capacity	Psup (at Tdesign -10°C)	kW		1.5				0.0	
			Tbiv (bivalent temperature)	COPd		2.30				2.05	
				Pdh	kW		7.6			8.3	
				PERd	%		92.0			82.0	
		Cold climate water outlet 55°C	General	Annual energy consumption	kWh	7,028		6,890		6,861	
				ηs (Seasonal space heating efficiency)	%	123			126		
Prated at -22°C	kW					9					
Qhe Annual energy consumption (GCV)	Gj					25					
A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)				1.0						
	COPd				2.61						
	Pdh	kW		5.3							
B Condition (2°CDB/1°CWB)	Cdh (Degradation heating)			1.0							
	COPd			3.90							
	Pdh	kW		3.3							
C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)			156.0							
	COPd			1.0							
	Pdh	kW		4.96							
D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)			3.5							
	COPd			198.4							
	Pdh	kW		6.56							
Tol (temperature operating limit)	COPd			1.49		1.56		1.62			
	Pdh	kW		4.9		6.1		7.2			
	PERd	%		59.6		62.4		64.8			

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETSX12P30E	ETSX12P50E	ETSX12P30E	ETSX12P50E	ETSX12P30E	ETSX12P50E
				+	+	+	+	+	+
				EPRA08EW1	EPRA08EW1	EPRA10EW1	EPRA10EW1	EPRA12EW1	EPRA12EW1
Space heating 	Cold climate water outlet 55°C	Tol (temperature operating limit)	TOL °C				-22		
			WTOL °C				55		
	G Condition (-15°CDB/-)	COPd			2.00			2.03	
		Pdh kW			6.1			7.2	
	Tbiv (bivalent temperature)	PERd %			80.0			81.2	
		COPd			2.25			2.03	
	Rated heat output supplementary capacity	Pdh kW			6.6			7.2	
		PERd %			90.0			81.2	
	Warm climate water outlet 55°C	Tbiv °C			-12			-15	
		Psup (at Tdesign -22°C)	kW		4.1		3.0		1.8
Average climate water outlet 35°C	General	Annual energy consumption	kWh				2,853		
		ηs (Seasonal space heating efficiency)	%				177		
	B Condition (2°CDB/1°CWB)	Prated at 2°C	kW				10		
		Qhe Annual energy consumption (GCV)	Gj				10		
	C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)					1.0		
		COPd					2.66		
	D Condition (12°CDB/11°CWB)	Pdh kW					8.0		
		PERd %					106.4		
	Tbiv (bivalent temperature)	Cdh (Degradation heating)					1.0		
		COPd					3.79		
A Condition (-7°CDB/-8°CWB)	Pdh kW					6.7			
	PERd %					151.6			
Average climate water outlet 35°C	General	Cdh (Degradation heating)				1.0			
		COPd				5.87			
Tbiv (bivalent temperature)	Pdh kW					3.6			
	PERd %					234.8			
Average climate water outlet 35°C	General	COPd				3.13			
		Pdh kW				8.4			
Average climate water outlet 35°C	General	PERd %				125.2			
		Tbiv °C				4			
Average climate water outlet 35°C	General	Annual energy consumption	kWh	3,462			3,440		
		ηs (Seasonal space heating efficiency)	%	195			196		
Average climate water outlet 35°C	General	Prated at -10°C	kW				8		
		Qhe Annual energy consumption (GCV)	Gj				12		
Average climate water outlet 35°C	General	SCOP		4.95			4.98		
		Seasonal space heating eff. class					A+++		
Average climate water outlet 35°C	General	COPd				3.20			

2 Specifications



1 - 1 EPRA08-12EW

Technical specifications				ETSX12P30E	ETSX12P50E	ETSX12P30E	ETSX12P50E	ETSX12P30E	ETSX12P50E	
				+	+	+	+	+	+	
				EPRA08EW1	EPRA08EW1	EPRA10EW1	EPRA10EW1	EPRA12EW1	EPRA12EW1	
Space heating 	Average climate water outlet 35°C	A Condition (-7°CDB/-8°CWB)	Pdh	kW					7.5	
			PERd	%					128.0	
		B Condition (2°CDB- B/1°CWB)	Cdh (Degradation heating)						1.0	
			COPd						4.93	
			Pdh	kW					4.4	
			PERd	%					197.2	
		C Condition (7°CDB- B/6°CWB)	Cdh (Degradation heating)						1.0	
			COPd						6.37	
			Pdh	kW					4.3	
			PERd	%					254.8	
		D Condition (12°CDB/11°CWB)	Cdh (Degradation heating)						1.0	
			COPd						8.13	
			Pdh	kW					6.6	
			PERd	%					325.2	
		Tol (temperature operating limit)	COPd			2.90				2.86
			Pdh	kW		6.9				8.1
			PERd	%		116.0				114.4
			TOL	°C						-10
			WTOL	°C						35
		Tbiv (bivalent temperature)	COPd			3.20				2.86
			Pdh	kW		7.5				8.1
			PERd	%		128.0				114.4
			Tbiv	°C			-7			-10
Rated heat output supplementary capacity	Psup (at Tdesign -10°C)	kW		1.4				0.0		
Cold climate water outlet 35°C	General	Annual energy consumption	kWh		5,334		5,180		5,165	
		ηs (Seasonal space heating efficiency)	%		161		168		169	
		Prated at -22°C	kW					9		
		Qhe Annual energy consumption (GCV)	Gj					19		
		A Condition (-7°CDB/-8°CWB)	COPd						3.48	
		Pdh	kW					5.4		
		PERd	%					139.2		
	B Condition (2°CDB- B/1°CWB)	Cdh (Degradation heating)						1.0		
		COPd						5.40		
		Pdh	kW					3.6		
		PERd	%					216.0		
	C Condition (7°CDB/6°CWB)	Cdh (Degradation heating)						1.0		
		COPd						6.53		

2 Specifications

1 - 1 EPRA08-12EW

2



Technical specifications				ETSX12P30E	ETSX12P50E	ETSX12P30E	ETSX12P50E	ETSX12P30E	ETSX12P50E		
				+	+	+	+	+	+		
				EPRA08EW1	EPRA08EW1	EPRA10EW1	EPRA10EW1	EPRA12EW1	EPRA12EW1		
Space heating 	Cold climate water outlet 35°C	C Condition (7°CDB/6°CWB)	Pdh					5.3			
			PERd					261.2			
		D Condition (12°CDB/11°CWB)	Cd _h (Degradation heating)						1.0		
			COP _d						7.98		
		Pdh						6.6			
		PERd						319.2			
		Tol (temperature operating limit)	COP _d		2.11		2.14		2.16		
			Pdh		4.9		5.9		6.5		
		PERd		84.4		85.6		86.4			
		TOL		°C		-22					
	WTOL		°C		35						
	G Condition (-15°CDB/-)	COP _d		2.68		2.64					
		Pdh		6.0		7.0					
	PERd		107.2		105.6						
	Tbiv (bivalent temperature)	COP _d		2.95		2.64					
		Pdh		6.5		7.0					
	PERd		118.0		105.6						
	Tbiv		°C		-12		-15				
	Rated heat output supplementary capacity	P _{sup} (at T _{design} -22°C)		kW		4.1		3.1		2.6	
		General		Annual energy consumption		kWh		1,835			
Warm climate water outlet 35°C			η _s (Seasonal space heating efficiency)		%		247				
			Prated at 2°C		kW		9				
			Q _{he} Annual energy consumption (GCV)		Gj		7				
	B Condition (2°CDB/1°CWB)	Cd _h (Degradation heating)						1.0			
		COP _d						4.07			
	Pdh						7.7				
	PERd						162.8				
	C Condition (7°CDB/6°CWB)	Cd _h (Degradation heating)						1.0			
		COP _d						5.85			
	Pdh						5.5				
PERd						234.0					
Tbiv (bivalent temperature)	COP _d						4.97				
	Pdh						6.9				
PERd						198.8					
Tbiv		°C		5							
D Condition (12°CDB/11°CWB)	Cd _h (Degradation heating)						1.0				
	COP _d						7.85				
Space heating 	Warm climate water	D Condition (12°CDB/11°CWB)	Pdh					6.2			
			PERd					314.0			

(1)Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) |
 (2)Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) |
 (3)DB/WB 7°C/6°C - LWC 35°C (dT=5°C) with pump at full speed |
 Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C)

Technical specifications				ETSXB12P30E +	ETSXB12P50E +	ETSXB12P30E +	ETSXB12P50E +	ETSXB12P30E +	ETSXB12P50E +	
				EPRA08EW1	EPRA08EW1	EPRA10EW1	EPRA10EW1	EPRA12EW1	EPRA12EW1	
Indoor unit				ETSXB12P30EF	ETSXB12P50EF	ETSXB12P30EF	ETSXB12P50EF	ETSXB12P30EF	ETSXB12P50EF	
Outdoor unit				EPRA08EAW1		EPRA10EAW1		EPRA12EAW1		
Heating capacity	Nom.				6.17 (1)					
Cooling capacity	Nom.		6.81 (2)		7.97 (2)				8.62 (2)	
Power input	Heating	Nom.			1.21 (1)					
	Cooling	Nom.	2.08 (2)		2.57 (2)				2.86 (2)	
COP						5.10 (1)				
EER				3.28 (2)		3.10 (2)		3.01 (2)		
Pump	Type				Grundfos UPM3L K 20-75 CHBL AZA 3 RT					
	Nominal	Heating ESP unit			53.5 (3)					

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications					ETSB12P30E + EPRA08EW1	ETSB12P50E + EPRA08EW1	ETSB12P30E + EPRA10EW1	ETSB12P50E + EPRA10EW1	ETSB12P30E + EPRA12EW1	ETSB12P50E + EPRA12EW1	
Water side Heat exchanger	Water flow rate	Cooling	Nom.	l/min	19.5 (2)		22.9 (2)		24.7 (2)		
		Heating	Nom.	l/min	17.7 (1)						
General	Supplier/Manu-facturer details	Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium									
	Product description	Daikin Europe N.V.									
LW(A) Sound power level (according to EN14825)	Indoor	Air-to-water heat pump			Yes						
		Brine-to-water heat pump			No						
		Heat pump combination heater			Yes						
		Low-temperature heat pump			No						
		Supplementary heater integrated			No						
		Water-to-water heat pump			No						
				dB(A)	47.3						
LW(A) Sound power level (according to EN14825)	Outdoor			dB(A)	53.0						
Sound condition Ecodesign and energy label					Sound power in heating mode, measured according to the EN12102 under conditions of the EN14825						
Space heating general	Air to water unit	Rated airflow (outdoor)		m ³ /h	3,542						
		Other	Capacity control			Inverter					
	Pck (Crankcase heater mode) kW			0.000							
	Poff (Off mode) kW			0.027							
	Psb (Standby mode) kW			0.027							
	Pto (Thermostat off) kW			0.024							
Domestic hot water heating 	General	Declared load profile			L						
		Function to fix water heating during off peak hours			No						
	Average climate	AEC (Annual electricity consumption)		kWh	858	1,281	858	1,281	858	1,281	
		COPdhw			2.83	3.17	2.83	3.17	2.83	3.17	
Heat up time			2h 29min	3h 13min	2h 29min	3h 13min	2h 29min	3h 13min			
Mixed water at 40°C		l	194.0	246.0	194.0	246.0	194.0	246.0			
ηwh (water heating efficiency)		%	119	131	119	131	119	131			
Domestic hot water heating 	Average climate	Qelec (Daily electricity consumption)		kWh	4.116	6.008	4.116	6.008	4.116	6.008	
		Reference hot water temperature		°C	47.2	44.5	47.2	44.5	47.2	44.5	
		Stand-by power input		W	37.4	32.1	37.4	32.1	37.4	32.1	
	Water heating energy efficiency class		A+								
	Cold climate	AEC (Annual electricity consumption)		kWh	1,152	1,485	1,152	1,485	1,152	1,485	
		COPdhw			2.12	2.74	2.12	2.74	2.12	2.74	
		Heat up time			2h 23min	3h 36min	2h 23min	3h 36min	2h 23min	3h 36min	
		Mixed water at 40°C		l	175.0	246.0	175.0	246.0	175.0	246.0	
		ηwh (water heating efficiency)		%	89	113	89	113	89	113	
		Qelec (Daily electricity consumption)		kWh	5.498	6.961	5.498	6.961	5.498	6.961	
	Warm climate	Reference hot water temperature		°C	46.3	44.5	46.3	44.5	46.3	44.5	
		Stand-by power input		W	45.5	35.9	45.5	35.9	45.5	35.9	
		AEC (Annual electricity consumption)		kWh	759	1,109	759	1,109	759	1,109	
COPdhw			3.19	3.65	3.19	3.65	3.19	3.65			
Heat up time			2h 19min	3h 24min	2h 19min	3h 24min	2h 19min	3h 24min			
Mixed water at 40°C		l	194.0	246.0	194.0	246.0	194.0	246.0			
ηwh (water heating efficiency)		%	135	151	135	151	135	151			
Qelec (Daily electricity consumption)		kWh	3.652	5.219	3.652	5.219	3.652	5.219			
Reference hot water temperature		°C	47.2	44.5	47.2	44.5	47.2	44.5			
Stand-by power input		W	35.2	30.7	35.2	30.7	35.2	30.7			

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETSB12P30E + EPRA08EW1	ETSB12P50E + EPRA08EW1	ETSB12P30E + EPRA10EW1	ETSB12P50E + EPRA10EW1	ETSB12P30E + EPRA12EW1	ETSB12P50E + EPRA12EW1				
Space heating	Average climate water outlet 55°C	General	Annual energy consumption	4,894		4,871							
				ηs (Seasonal space heating efficiency)	141								
				Prated at -10°C	9								
				Qhe Annual energy consumption (GCV)	18								
				SCOP	3.59		3.60						
				Seasonal space heating eff. class	A++								
				A Condition (-7°CDB/-8°CWB)	Cdh (Degradation heating)	1.0							
					COPd	2.30							
					Pdh kW	7.6							
					PERd %	92.0							
				B Condition (2°CDB/-1°CWB)	Cdh (Degradation heating)	1.0							
					COPd	3.50							
					Pdh kW	4.6							
				C Condition (7°CDB/6°CWB)	PERd %	140.0							
					Cdh (Degradation heating)	1.0							
							COPd	4.61					
							Pdh kW	3.0					

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETSXB12P30E + EPRA08EW1	ETSXB12P50E + EPRA08EW1	ETSXB12P30E + EPRA10EW1	ETSXB12P50E + EPRA10EW1	ETSXB12P30E + EPRA12EW1	ETSXB12P50E + EPRA12EW1		
Space heating 	Average climate water outlet 55°C	C Condition (7°CDB/6°CWB)	PERd	%	184.4						
		D Condition (12°CDB/11°CWB)	Cd _h (Degradation heating)			1.0					
			COP _d			6.16					
			Pd _h		kW	3.7					
			PER _d		%	246.4					
		Tol (temperature operating limit)	COP _d			2.01				2.05	
			Pd _h		kW	7.0				8.3	
			PER _d		%	80.4				82.0	
			TOL		°C					-10	
		Rated heat output supplementary capacity	P _{sup} (at T _{design} -10°C)		kW	1.5				0.0	
	T _{biv} (bivalent temperature)		COP _d			2.30			2.05		
			Pd _h		kW	7.6			8.3		
			PER _d		%	92.0			82.0		
	Cold climate water outlet 55°C	General	Annual energy consumption		kWh	7,028		6,890		6,861	
			η _s (Seasonal space heating efficiency)		%	123			126		
			Prated at -22°C		kW				9		
			Q _{he} Annual energy consumption (GCV)		Gj				25		
		A Condition (7°CDB/8°CWB)	Cd _h (Degradation heating)			1.0					
COP _d				2.61							
Pd _h			kW	5.3							
PER _d			%	104.4							
B Condition (2°CDB/1°CWB)		Cd _h (Degradation heating)			1.0						
		COP _d			3.90						
	Pd _h		kW	3.3							
C Condition (7°CDB/6°CWB)	Cd _h (Degradation heating)			1.0							
	COP _d			4.96							
	Pd _h		kW	3.5							
D Condition (12°CDB/11°CWB)	COP _d			6.56							
	Pd _h		kW	4.2							
	PER _d		%	262.4							
Tol (temperature operating limit)	COP _d			1.49		1.56		1.62			
	Pd _h		kW	4.9		6.1		7.2			
	PER _d		%	59.6		62.4		64.8			

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETSB12P30E + EPRA08EW1	ETSB12P50E + EPRA08EW1	ETSB12P30E + EPRA10EW1	ETSB12P50E + EPRA10EW1	ETSB12P30E + EPRA12EW1	ETSB12P50E + EPRA12EW1	
Space heating Cold climate water outlet 55°C	Tol (temperature operating limit)	TOL	°C	-22						
		WTOL	°C	55						
	G Condition (-15°CDB/-)	COPd		2.00		2.03				
		Pdh	kW	6.1		7.2				
		PERd	%	80.0		81.2				
	Tbiv (bivalent temperature)	COPd		2.25		2.03				
		Pdh	kW	6.6		7.2				
		PERd	%	90.0		81.2				
	Rated heat output supplementary capacity	Tbiv	°C	-12		-15				
		Psup (at Tdesign -22°C)	kW	4.1		3.0		1.8		
Warm climate water outlet 55°C	General	Annual energy consumption	kWh	2,853						
		ηs (Seasonal space heating efficiency)	%	177						
		Prated at 2°C	kW	10						
		Qhe Annual energy consumption (GCV)	Gj	10						
	B Condition (2°CDB/1°CWB)	CdH (Degradation heating)			1.0					
		COPd		2.66						
		Pdh	kW	8.0						
	C Condition (7°CDB/6°CWB)	CdH (Degradation heating)			106.4					
		COPd		1.0						
		Pdh	kW	3.79						
	D Condition (12°CDB/11°CWB)	CdH (Degradation heating)			6.7					
		COPd		151.6						
		Pdh	kW	3.6						
	Tbiv (bivalent temperature)	PERd	%	234.8						
		COPd		3.13						
		Pdh	kW	8.4						
Average climate water outlet 35°C	General	PERd	%	125.2						
		Tbiv	°C	4						
		Annual energy consumption	kWh	3,462		3,440				
		ηs (Seasonal space heating efficiency)	%	195		196				
	Prated at -10°C	kW	8							
	Qhe Annual energy consumption (GCV)	Gj	12							
	SCOP		4.95		4.98					
A Condition (-7°CDB/-8°CWB)	Seasonal space heating eff. class			A+++						
	COPd		3.20							

2 Specifications

1 - 1 EPRA08-12EW

Technical specifications				ETSB12P30E + EPRA08EW1	ETSB12P50E + EPRA08EW1	ETSB12P30E + EPRA10EW1	ETSB12P50E + EPRA10EW1	ETSB12P30E + EPRA12EW1	ETSB12P50E + EPRA12EW1	
Space heating 	Average climate water outlet 35°C	A Condition (7°CDB/-8°CWB)	Pdh	kW					7.5	
			PERd	%					128.0	
		B Condition (2°CDB/-1°CWB)	CdH (Degradation heating)							1.0
			COPd							4.93
			Pdh	kW						4.4
			PERd	%						197.2
		C Condition (7°CDB/-6°CWB)	CdH (Degradation heating)							1.0
			COPd							6.37
			Pdh	kW						4.3
			PERd	%						254.8
	D Condition (12°CDB/11°CWB)	CdH (Degradation heating)							1.0	
		COPd							8.13	
		Pdh	kW						6.6	
		PERd	%						325.2	
	Tol (temperature operating limit)	COPd			2.90				2.86	
		Pdh	kW		6.9				8.1	
		PERd	%		116.0				114.4	
		TOL	°C						-10	
	Tbiv (bivalent temperature)	WTOL	°C						35	
		COPd			3.20				2.86	
Pdh		kW		7.5				8.1		
PERd		%		128.0				114.4		
Rated heat output supplementary capacity	Tbiv	°C			-7			-10		
	Psup (at Tdesign -10°C)	kW		1.4				0.0		
Cold climate water outlet 35°C	General	Annual energy consumption	kWh		5,334		5,180		5,165	
		ηs (Seasonal space heating efficiency)	%		161		168		169	
		Prated at -22°C	kW						9	
		Qhe Annual energy consumption (GCV)	Gj						19	
		A Condition (7°CDB/-8°CWB)	COPd							3.48
	Pdh		kW						5.4	
	PERd		%						139.2	
	B Condition (2°CDB/-1°CWB)	CdH (Degradation heating)							1.0	
		COPd							5.40	
		Pdh	kW						3.6	
	C Condition (7°CDB/-6°CWB)	PERd	%						216.0	
		CdH (Degradation heating)							1.0	
		COPd							6.53	

2 Specifications

1 - 1 EPRA08-12EW

2

Technical specifications				ETSXB12P30E + EPRA08EW1	ETSXB12P50E + EPRA08EW1	ETSXB12P30E + EPRA10EW1	ETSXB12P50E + EPRA10EW1	ETSXB12P30E + EPRA12EW1	ETSXB12P50E + EPRA12EW1	
Space heating Cold climate water outlet 35°C	C Condition (7°CDB- B/6°CWB)	Pdh	kW	5.3						
		PERd	%	261.2						
	D Condition (12°CDB/11°CWB)	CdH (Degradation heating)			1.0					
		COPd		7.98						
		Pdh	kW	6.6						
		PERd	%	319.2						
	Tol (temperature operating limit)	COPd		2.11		2.14		2.16		
		Pdh	kW	4.9		5.9		6.5		
		PERd	%	84.4		85.6		86.4		
		TOL	°C	-22						
	WTOL			°C						
				35						
	G Condition (-15°CDB/-)	COPd		2.68		2.64				
		Pdh	kW	6.0		7.0				
		PERd	%	107.2		105.6				
	Tbiv (bivalent temperature)	COPd		2.95		2.64				
		Pdh	kW	6.5		7.0				
		PERd	%	118.0		105.6				
		Tbiv	°C	-12		-15				
	Rated heat output supplementary capacity	Psup (at Tdesign -22°C)	kW	4.1		3.1		2.6		
Warm climate water outlet 35°C	General	Annual energy consumption	kWh	1,835						
		ηs (Seasonal space heating efficiency)	%	247						
		Prated at 2°C	kW	9						
		Qhe Annual energy consumption (GCV)	Gj	7						
	B Condition (2°CDB- B/1°CWB)	CdH (Degradation heating)			1.0					
		COPd		4.07						
		Pdh	kW	7.7						
	C Condition (7°CDB- B/6°CWB)	CdH (Degradation heating)			1.0					
		COPd		5.85						
		Pdh	kW	5.5						
Tbiv (bivalent temperature)	PERd	%	234.0							
	COPd		4.97							
	Pdh	kW	6.9							
	PERd	%	198.8							
D Condition (12°CDB/11°CWB)	Tbiv	°C	5							
	CdH (Degradation heating)			1.0						
Space heating Warm climate water	D Condition (12°CDB/11°CWB)	COPd		7.85						
		Pdh	kW	6.2						
		PERd	%	314.0						

(1) Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) |
 (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) |
 (3) DB/WB 7°C/6°C - LWC 35°C (dT=5°C) with pump at full speed |
 Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C)

Technical Specifications				EPRA08EW1	EPRA10EW1	EPRA12EW1
Casing	Colour	Silver / Black				
	Material	Polyester painted galvanised steel plate				
Dimensions	Unit	Height	mm	1,003		
		Width	mm	1,270		
		Depth	mm	533		
	Packed unit	Height	mm	1,340		
		Width	mm	1,440		
		Depth	mm	690		
Weight	Unit	kg	118			
	Packed unit	kg	150			
Packing	Material	Carton / Wood (pallet) / PE (Straps) / Metal				
	Weight	kg	28			

2 Specifications

1 - 1 EPRA08-12EW

Technical Specifications				EPRA08EW1	EPRA10EW1	EPRA12EW1	
Heat exchanger	Length	mm		1,200			
	Rows	Quantity		2			
	Fin pitch	mm		2.00			
	Passes	Quantity		10			
	Face area	m ²		1.19			
	Stages	Quantity		44			
	Tube type			ø7 Hi-XSL			
	Fin	Type			WF fin		
		Treatment		Anti-corrosion treatment (PE)			
Fan	Type			Propeller fan			
	Quantity			1			
	Air flow rate	Heating	Nom.	m ³ /min	59.0		
			High	m ³ /min	80.1		
		Cooling	Nom.	m ³ /min	80		
			High	m ³ /min	80.1		
Discharge direction			Horizontal				
Fan motor	Quantity			1			
	Model			Brushless DC motor			
	Output	W		234			
	Drive			Direct drive			
	Speed	Steps			6		
		Heating	Nom.	rpm	390		
Cooling		Nom.	rpm	520			
Compressor	Quantity			1			
Compressor	Model			2Y260BPDY1P#C			
	Type			Hermetically sealed swing compressor			
	Starting method			Inverter driven			
PED	Category			Category II			
Operation range	Heating	Min.	°CDB	-28.0			
		Max.	°CDB	25			
	Cooling	Min.	°CDB	10			
		Max.	°CDB	43			
	Domestic hot water	Max.	°CDB	35			
		Min.	°CDB	-28			
PED	Most critical part	Name		Accumulator			
		P _s *V	Bar*l	109			
Piping connections	Water inlet heat exchanger diameter	inch		G1" (male)			
	Water outlet heat exchanger diameter	inch		G1" (male)			
Sound power level	Heating	Nom.	dB(A)	55.6 (1)			
	Cooling	Nom.	dB(A)	61.2 (2)	61.4 (2)	60.9 (2)	
Sound pressure level	Heating	Nom.	dB(A)	41.1 (3)			
	Cooling	Nom.	dB(A)	47.1 (4)		47.2 (4)	
	Night quiet mode	Heating	dB(A)	43.2 (3)			
		Cooling	dB(A)	44.0 (4)			
Refrigerant	Type			R-32			
	GWP			675.0			
	Charge	TCO ₂ Eq		2.19			
	Charge	kg		3.25			
	Control			Expansion valve			
	Circuits	Quantity			1		
Refrigerant oil	Type			FW68DE			
	Charged volume	l		1.1			
Piping connections	Piping length	OU - IU	Max.	m	50		
	High pressure side	Design pressure		bar	46		
	Level difference	IU - OU	Max.	m	10.0		
	Water circuit	Filter ball valve			Yes		
Defrost control			Sensor for outdoor heat exchanger temperature				
Capacity control	Method			Inverter controlled			
Safety devices	Item	01			High pressure switch		
		02			High pressure switch		
	03			Thermal protector for compressor			
Safety devices	Item	04			Fuse		
Defrost method			Reversed cycle				

2 Specifications

1 - 1 EPRA08-12EW

2

Electrical Specifications			EPRA08EW1	EPRA10EW1	EPRA12EW1	
Power supply	Name		W1			
	Phase		3~			
	Frequency	Hz	50			
	Voltage	V	400			
	Voltage range	Min.	%	-10		
		cos phi	Nom.	0.72		
			Max.	0.93		
	Max.	%	10			
Current	Minimum Ssc value	kVa	Equipment complying with EN / IEC 61000-3-12			
	Recommended fuses	A	16			
	Inverter modulation	Min. %	44	37	35	
Wiring connections	For power supply	Remark	See installation manual outdoor unit			
	For connection with indoor	Remark	See installation manual indoor unit			

(1)Cooling Ta 35°C - LWE 18°C (DT = 5°C); Heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) |

(2)Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) |

(3)Sound pressure level is a relative value, depending on the distance and acoustic environment. For more details, please refer to the sound level drawings. |

(4)The sound pressure level is measured via a microphone at a certain distance from the unit. It is a relative value depending on the distance and acoustic environment. Refer to sound spectrum drawing for more information. Condition: Ta 35°C - LWE 7°C (DT =

3 Electrical data

3 - 1 Electrical Data

EPRA08-12EV
EPRA08-12EW

* Electrical meter specification

- Pulse meter type/voltage-free contact for 5 V DC detection by PCB.
- Possible number of pulses
 - 0.1· pulse/kWh
 - 1· pulse/kWh
 - 10· pulse/kWh
 - 100· pulse/kWh
 - 1000· pulse/kWh
- Pulse duration
 - minimum On time: ·40ms·
 - Minimum OFF time: ·100ms·
- Measurement type (depending on installation)
 - Single-phase AC meter
 - Three-phase AC meter

Balanced loads

 - Three-phase AC meter

Unbalanced loads

* Electrical meter installation guideline

- It is the responsibility of the installer to cover the complete power consumption with electrical meters (combination of estimation and metering is not allowed).
- Required number of electrical meters

Outdoor unit type		EPRA(08/10/12)EA*					
Indoor unit type		ETB(H/X)12EF*			ETV(H/X/Z)12S(U)*EA*		
	Backup heater type	6V		9W	6V		9W
	Backup heater power supply	1~ 230V	3~ 230V	3~ 400V	1~ 230V	3~ 230V	3~ 400V
	Backup heater configuration	2 / 4 / 6 kW	6 kW	3 / 6 / 9 kW	2 / 4 / 6 kW	6 kW	3 / 6 / 9 kW
Normal kWh rate power supply							
Electrical meter type	1~	1	-	-	1	-	-
	3~ balanced	-	-	-	-	-	-
	3~ unbalanced	-	1	1	-	1	1
Preferential kWh rate power supply							
Electrical meter type	1~	2	1	1	2	1	1
	3~ balanced	-	-	-	-	-	-
	3~ unbalanced	-	1	1	-	1	1

4D133788

3 Electrical data

3 - 1 Electrical Data

3

EPRA08-12EV
EPRA08-12EW

* Electrical meter specification

- Pulse meter type/voltage-free contact for 5 V DC detection by PCB.
- Possible number of pulses
 - 0.1· pulse/kWh
 - 1· pulse/kWh
 - 10· pulse/kWh
 - 100· pulse/kWh
 - 1000· pulse/kWh
- Pulse duration
 - minimum On time: ·40ms·
 - Minimum OFF time: ·100ms·
- Measurement type (depending on installation)
 - Single-phase AC meter
 - Three-phase AC meter

Balanced loads

Three-phase AC meter

Unbalanced loads

* Electrical meter installation guideline

- It is the responsibility of the installer to cover the complete power consumption with electrical meters (combination of estimation and metering is not allowed).
- Required number of electrical meters

Outdoor unit type		EPRA(08/10/12)EA*		
Indoor unit type		ETS*12*EF		
	Backup heater type (optional)	EKECBU*3V	EKECBU*6V	EKECBU*9W
	Backup heater power supply	1~ 230V	1~ 230V	3~ 400V
	Backup heater configuration	1/2/3 kW	2 / 4 / 6 kW	3 / 6 / 9 kW
Normal kWh rate power supply				
Electrical meter type	1~	1	1	-
	3~ balanced	-	-	-
	3~ unbalanced	-	-	1
Preferential kWh rate power supply				
Electrical meter type	1~	2	2	1
	3~ balanced	-	-	-
	3~ unbalanced	-	-	1

4D136059B




4 Capacity graphs

4 - 1 Cooling Capacity Graphs

EPRA08-12EV

EPRA08-12EW

Maximum cooling capacity

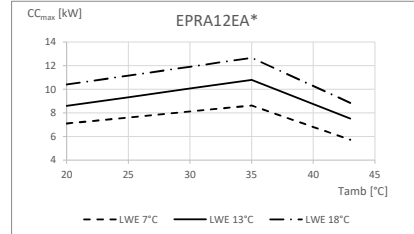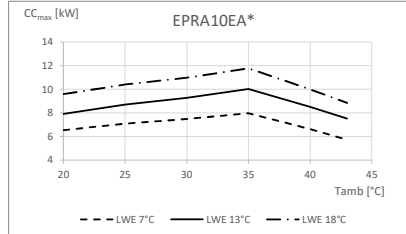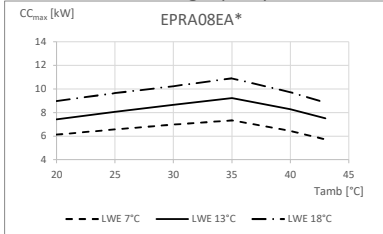

Symbols

CC_{max} Cooling capacity at maximum operating frequency, measured according to EN 14511.

LWE Leaving water evaporator temperature [°C]

Tamb Ambient temperature [°C DB]

Conditions

Cooling capacity

Capacity according to standard EN 14511 and valid for chilled water range ΔT = 3~8°C.

Notes

The capacity and power input is valid for ·V3· models at ·230·V and for ·W1· models at ·400·V.

The capacity and the power input are at maximum operation.

4D133539

4 Capacity graphs




4 - 2 Cooling Capacity Graphs - quiet mode

EPRA08-12EV

EPRA08-12EW

4

Maximum cooling capacity

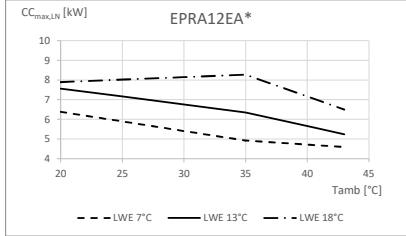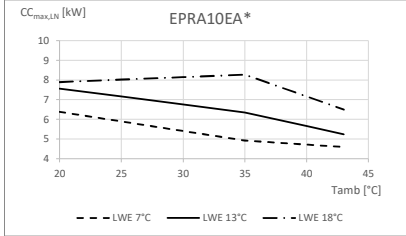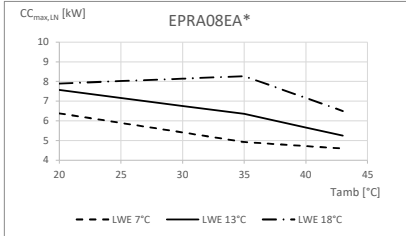

Symbols

- CC_{maxLN} Cooling capacity at maximum operating frequency, measured according to EN 14511.
- LWE Leaving water evaporator temperature [°C]
- Tamb Ambient temperature [°C DB]

Conditions

Cooling capacity

Capacity according to standard EN 14511 and valid for chilled water range ΔT = 3-8°C.

Notes

The capacity and power input is valid for -V3- models at -230-V and for -W1- models at -400-V.
 Full load (maximum fan rps and maximum compressor rps for the dedicated low noise mode)
 Low noise level -1-

4D133540


4 Capacity graphs

4 - 3 Heating Capacity Graphs

EPRA08-12EV


EPRA08-12EW

Maximum heating capacity - integrated value

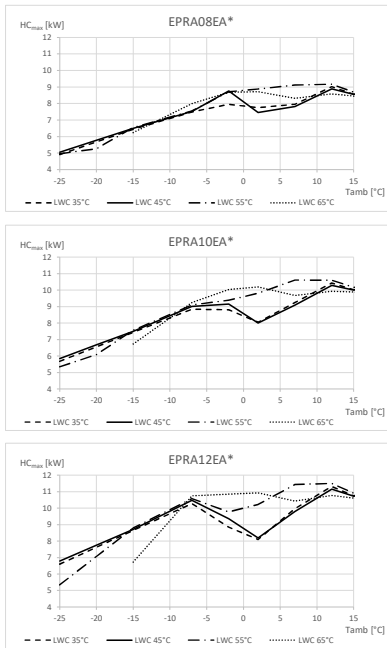

Symbols
 HC_{max} Heating capacity for maximum load, measured according to EN 14511
 LWC Leaving water condenser temperature [°C]
 Tamb Ambient temperature [°C DB]

Maximum heating capacity - peak values

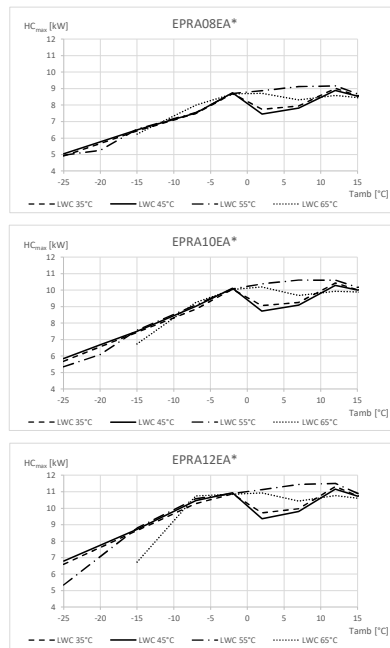

Conditions
Heating capacity
 Capacity according to standard EN 14511 and valid for heated water range ΔT = 3°-8° C.

Notes
 The capacity and power input is valid for -V3- models at -230-V and for -W1- models at -400-V.
 The capacity and the power input are at maximum operation.

4D133537B

4 Capacity graphs


4 - 4 Heating Capacity Graphs - quiet mode

4

EPRA08-12EV

EPRA08-12EW


Maximum heating capacity - integrated value

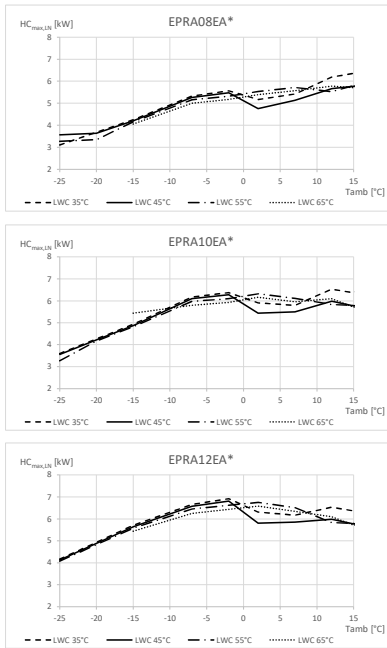

Symbols

HC_{max,IN} Heating capacity for maximum load, measured according to EN 14511
 LWC Leaving water condenser temperature [°C]
 Tamb Ambient temperature [°C DB]

Maximum heating capacity - peak values

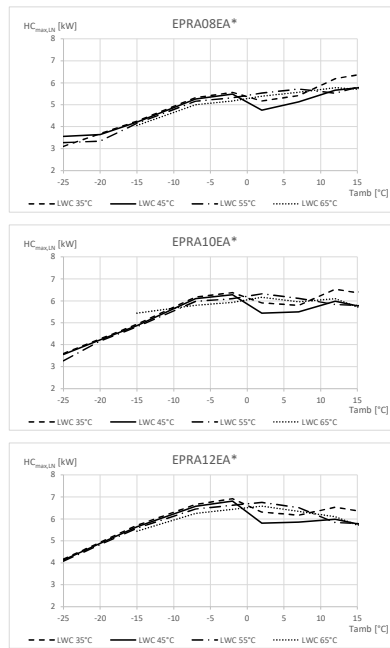

Conditions

Heating capacity

Capacity according to standard EN 14511 and valid for heated water range ΔT = 3°-8°.

Notes

The capacity and power input is valid for -V3- models at -230-V and for -W1- models at -400-V.
 Full load (maximum fan rpm and maximum compressor rpm for the dedicated low noise mode)
 Low noise level -1

4D133538A

5 Capacity tables

5 - 1 Certification Programs

EPRA08-12EV EPRA08-12EW

Rated data for certification programmes - heating mode

Tamb	EWC	LWC	EPRA08EAV3		EPRA10EAV3		EPRA12EAV3		EPRA08EAW1		EPRA10EAW1		EPRA12EAW1		Used for:
[°C]	[°C]	[°C]	HC	COP	HC	COP	HC	COP	HC	COP	HC	COP	HC	COP	
7/6	30	35	6,17	4,92	6,17	4,92	6,17	4,92	6,17	5,10	6,17	5,10	6,17	5,10	Keymark, EHPA
2/1	(30)	35	5,74	4,08	5,74	4,08	5,74	4,08	5,74	4,23	5,74	4,23	5,74	4,23	EHPA
-7/-8	(30)	35	7,49	3,04	7,49	3,04	7,49	3,04	7,49	3,14	7,49	3,14	7,49	3,14	General
7/6	40	45	7,73	3,57	7,73	3,57	7,73	3,57	7,73	3,70	7,73	3,70	7,73	3,70	General
-2/-3	(40)	45	8,58	2,83	8,66	2,59	9,36	2,54	8,58	2,91	8,66	2,69	9,36	2,64	MCS
7/6	47	55	7,72	2,94	7,72	2,94	7,72	2,94	7,72	3,05	7,72	3,05	7,72	3,05	Keymark, EHPA
-7/-8	47	55	7,55	2,05	9,02	2,11	9,02	2,11	7,55	2,13	9,02	2,19	9,02	2,19	GET

Rated data for certification programmes - cooling mode

Nominal cooling capacity

Tamb	EWE	LWE	EPRA08EAV3		EPRA10EAV3		EPRA12EAV3		EPRA08EAW1		EPRA10EAW1		EPRA12EAW1		Used for:
[°C]	[°C]	[°C]	CC	EER	CC	EER	CC	EER	CC	EER	CC	EER	CC	EER	
35	23	18	6,47	5,56	6,47	5,56	6,47	5,56	6,47	5,75	6,47	5,75	6,47	5,75	General
35	12	7	6,81	3,17	7,97	3,00	8,62	2,91	6,81	3,28	7,97	3,10	8,62	3,01	DAPT General

Seasonal data - cooling

LWE 7°C Low temperature Application

	EPRA08EAV3	EPRA10EAV3	EPRA12EAV3	EPRA08EAW1	EPRA10EAW1	EPRA12EAW1
Pdes [kW]	6,5	7,5	8,5	6,5	7,5	8,5
SEER [-]	5,38	5,34	5,31	5,42	5,41	5,41
ηs,c [%]	212	211	209	214	214	213
QCE [kWh/annum]	725	843	961	719	831	943

Rated data for certification programmes - domestic hot water performance

Indoor unit	ETV*12S(U)-J18EA*		ETV*12S(U)-J23EA*		ETS(X/H)(B)-J12P30EF		ETS(X/H)(B)-J12P50EF		Used for:
Outdoor unit	EPRA*EAV3	EPRA*EAW1	EPRA*EAV3	EPRA*EAW1	EPRA*EAV3	EPRA*EAW1	EPRA*EAV3	EPRA*EAW1	
Application	Average climate		Average climate		Average climate		Average climate		Keymark
Domestic hot water tank volume [l]	180		230		294		477		
Tapping pattern	L		L		L		XL		
Heat-up time (hh:mm:ss)	01:57:00		02:14:00		02:29:00		03:13:00		
θ _{wh} [°C]	52,5		52,5		47,2		44,5		
P _{es} [W]	51,7	50,7	44,8	43,9	38,1	37,4	32,7	32,1	
V _{eq40} [l]	240		298		194,0		246,0		
η _{wh} [%]	116,7	120,3	126,4	130	116	119	128	131	
COP _{DHW} [l]	2,72	2,8	2,96	3,05	2,75	2,83	3,1	3,17	

Symbols

- HC Heating capacity measured according to EN 14511
- CC Cooling capacity, measured according to EN 14511.
- COP/EER Coefficient of Performance/Energy efficiency ratio according to EN 14511.
- EWC Entering water condenser temperature [°C]
- LWC Leaving water condenser temperature [°C]
- EWE Entering water evaporator temperature [°C]
- LWE Leaving water evaporator temperature [°C]
- Tamb Ambient temperature [°C DB/WB]
- θ_{wh} Reference Domestic hot water temperature [°C] According to EN16147.
- P_{es} Standby power input According to EN16147.
- V_{eq40} Equivalent domestic hot water volume [l] According to EN16147.
- η_{wh} Efficiency [%] Domestic hot water heating mode According to EN16147.
- COP_{DHW} Domestic hot water COP

Rated data for certification programmes - heating mode
Measured according to UNI/TS 11300

Condition	Tamb	LWC	PLR	EPRA08EAV3		EPRA10EAV3		EPRA12EAV3		EPRA08EAW1		EPRA10EAW1		EPRA12EAW1	
	[°C]	[°C]	[%]	HC	COP	HC	COP	HC	COP	HC	COP	HC	COP	HC	COP
A	-7/-8	34	100	7,49	3,10	8,73	3,02	10,22	2,93	7,49	3,20	8,73	3,12	10,22	3,03
B	2/1	30	100	7,62	4,30	8,15	4,01	8,41	3,86	7,62	4,42	8,15	4,13	8,41	3,98
C	7/6	27	100	8,44	5,60	9,84	5,42	10,61	5,32	8,44	5,78	9,84	5,59	10,61	5,48
D	12/11	24	100	9,27	7,52	10,70	7,35	11,59	7,24	9,27	7,77	10,70	7,58	11,59	7,46
A	-7/-8	52	100	7,54	2,20	8,91	2,21	10,55	2,22	7,54	2,28	8,91	2,29	10,55	2,30
B	2/1	42	100	7,81	3,47	8,04	3,21	8,16	3,08	7,81	3,58	8,04	3,31	8,16	3,18
C	7/6	36	100	8,16	4,43	9,54	4,42	10,31	4,41	8,16	4,57	9,54	4,56	10,31	4,55
D	12/11	30	100	9,04	6,16	10,49	6,21	11,39	6,24	9,04	6,35	10,49	6,40	11,39	6,43

Rated data for certification programmes - cooling mode
Measured according to UNI/TS 11300

Condition	Tamb	LWE	PLR	EPRA08EAV3		EPRA10EAV3		EPRA12EAV3		EPRA08EAW1		EPRA10EAW1		EPRA12EAW1	
	[°C]	[°C]	[%]	CC	EER	CC	EER	CC	EER	CC	EER	CC	EER	CC	EER
A	35	18	100	10,89	4,35	11,77	4,11	12,66	3,87	10,89	4,51	11,77	4,26	12,66	4,01
B	30	18	75	7,96	6,05	8,73	5,98	9,51	5,90	7,96	6,26	8,73	6,19	9,51	6,11
C	25	18	50	5,51	8,83	5,90	8,36	6,28	7,88	5,51	9,04	5,90	8,60	6,28	8,17
D	20	18	25	3,47	12,42	3,47	12,42	3,47	12,42	3,47	12,29	3,47	12,29	3,47	12,29
A	35	7	100	7,33	3,09	7,97	3,00	8,62	2,91	7,33	3,20	7,97	3,10	8,62	3,01
B	30	7	75	5,34	4,06	5,86	4,01	6,38	3,96	5,34	4,20	5,86	4,15	6,38	4,10
C	25	7	50	3,66	5,21	3,95	5,22	4,24	5,23	3,66	5,36	3,95	5,39	4,24	5,42
D	20	7	25	2,19	6,20	2,19	6,20	2,19	6,20	2,19	6,17	2,19	6,17	2,19	6,17

4D133543A


5 Capacity tables

5 - 2 Domestic Hot Water performance

5

EPRA08-12EV
EPRA08-12EW

Heat-up times

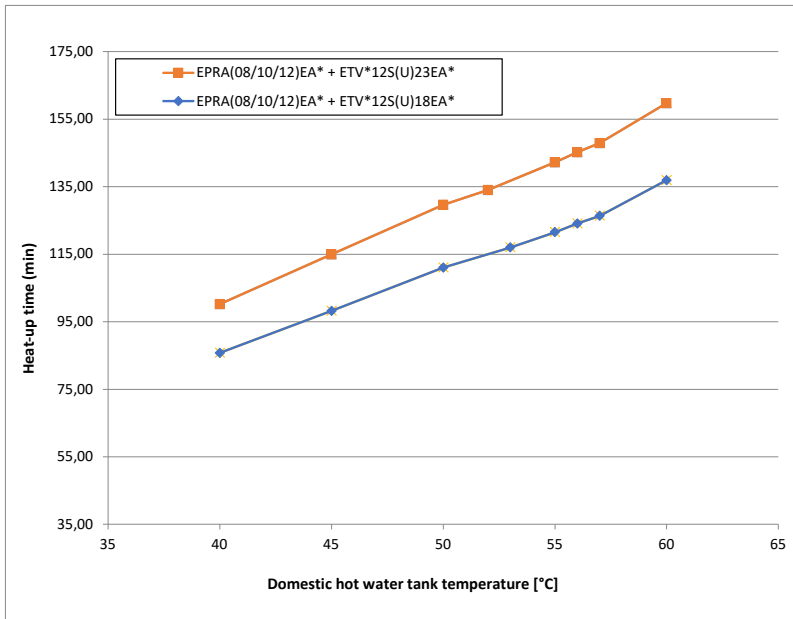

Notes

1. Time the indoor unit (heat pump only operation) requires to heat up the domestic hot water tank from 10°C to the indicated temperature.
See the operation range for maximum domestic hot water tank temperature during heat pump only operation.

Model name	Heat-up time domestic hot water tank until 45°C
EPRA(08/10/12)EA* + ETV*12S(U)18EA*	~98 min.
EPRA(08/10/12)EA* + ETV*12S(U)23EA*	~115 min.


4D133480

EPRA08-12EV
EPRA08-12EW

Selection guide for the domestic hot water tank volume

(1)

Ve_q 40°C = the amount of water with a temperature of 40°C that can be tapped when the domestic hot water tank is heated to a certain temperature, and the temperature of the cold inlet water is 10°C.

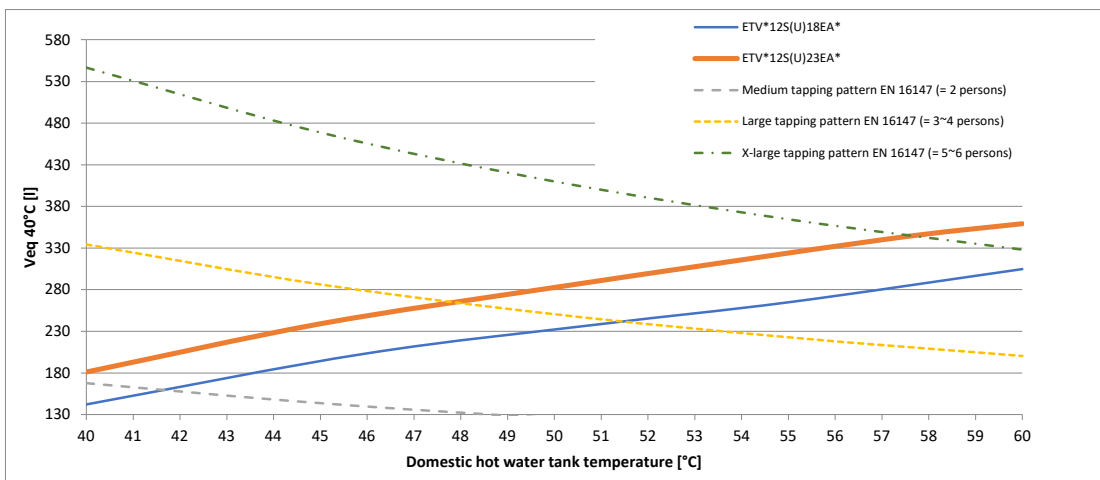

If a higher daily Ve_q 40°C is required, then additional heat-up cycles are required within 24 hours.
See the operation manual for more information.

Notes







- (1) According to EN16147.

4D133480

6 Dimensional drawings

6 - 1 Dimensional Drawings

EPRA08-12EV
EPRA08-12EW

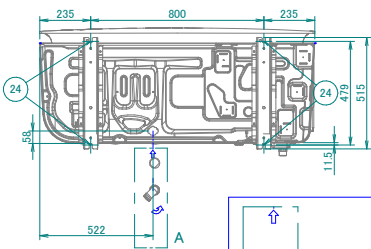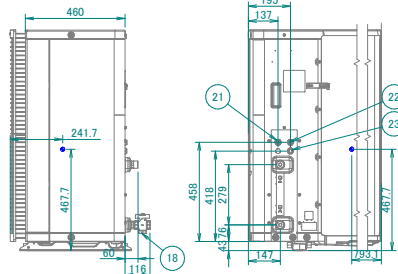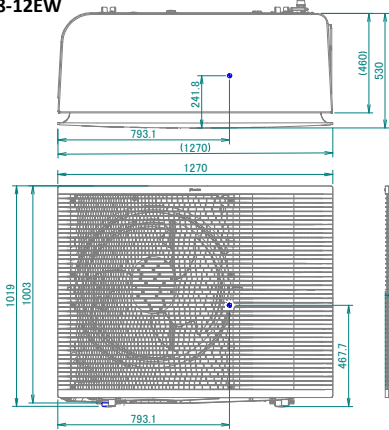

- 1 Muffler
- 2 High pressure switch ·41.7 bar·
- 3 Accumulator
- 4 Compressor
- 5 Solenoid valve (low pressure bypass)
- 6 Solenoid valve (hot gas pass)
- 7 Solenoid valve (liquid)
- 8 4-way valve
- 9 Capillary tube
- 10 4-way valve
- Coil
- 11 Plate heat exchanger
- 12 Electronic expansion valve (main)
- 13 Electronic expansion valve (injection)
- 14 High pressure switch ·46 bar·
- 15 Pressure sensor
- 16 Fan
- 17 Service port ·5/16"· flare
- 18 Shut-off valve / filter (included accessory)
- 19 Drain elbow (included accessory)
- 20 Sealing (included accessory)
- 21 Drain tube heater cable intake
- 22 Interconnection cable intake
- 23 Power supply cable intake
- 24 4 holes for anchor bolts
- M12
- 25 Outlet ·1"G·
- 26 Inlet ·1"G·


3D133408

7 Piping diagrams

7 - 1 Piping Diagrams

7

EPRA08-12EV
EPRA08-12EW

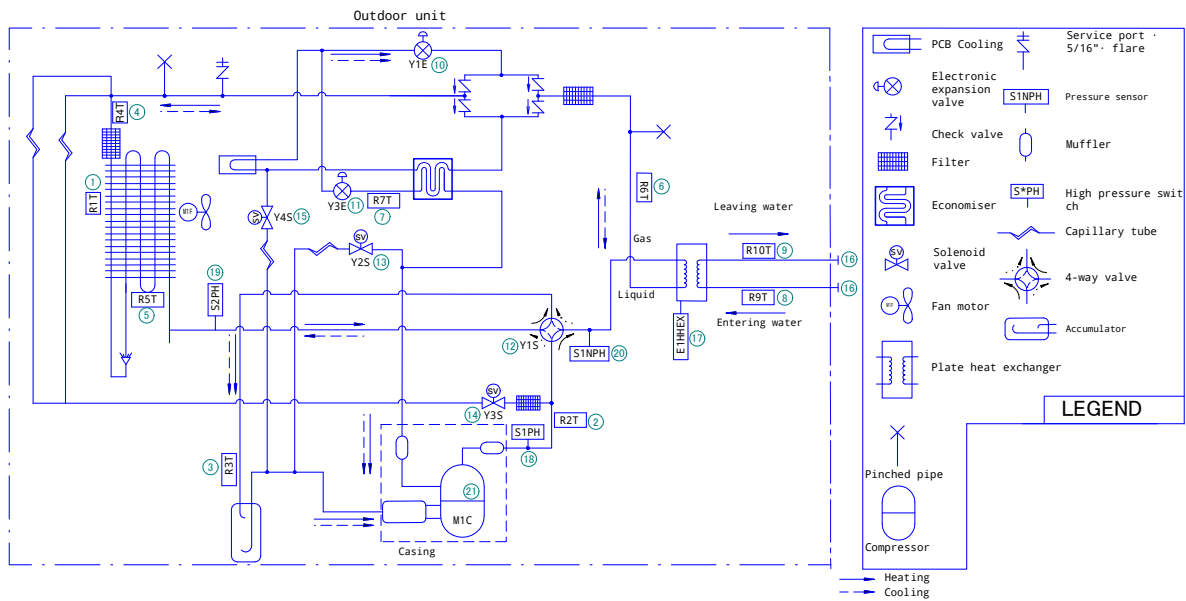

- ① R1T: Ambient thermistor
- ② R2T: Thermistor (discharge)
- ③ R3T: Thermistor (suction)
- ④ R4T: Thermistor (heat exchanger, liquid pipe)
- ⑤ R5T: Thermistor (heat exchanger middle)
- ⑥ R6T: Thermistor (liquid)
- ⑦ R7T: Thermistor (injection)



- ⑧ R9T: Inlet water thermistor
- ⑨ R10T: Outlet water thermistor
- ⑩ Y1E: Electronic expansion valve (main)
- ⑪ Y3E: Electronic expansion valve (injection)
- ⑫ Y1S: Solenoid valve (4-way valve)
- ⑬ Y2S: Solenoid valve (low pressure bypass)
- ⑭ Y3S: Solenoid valve (hot gas pass)

- ⑮ Y4S: Solenoid valve (liquid injection)
- ⑯ Screw connection ·1"·M·
- ⑰ E1HHEX: Plate heat exchanger Heater
- ⑱ S1PH: High pressure switch ·4.6MPa·
- ⑲ S2PH: High pressure switch ·4.17MPa·
- ⑳ S1NPH: High pressure sensor
- ㉑ Q1E Overload

3D127127

8 Wiring diagrams

8 - 1 Wiring Diagrams - Three Phase

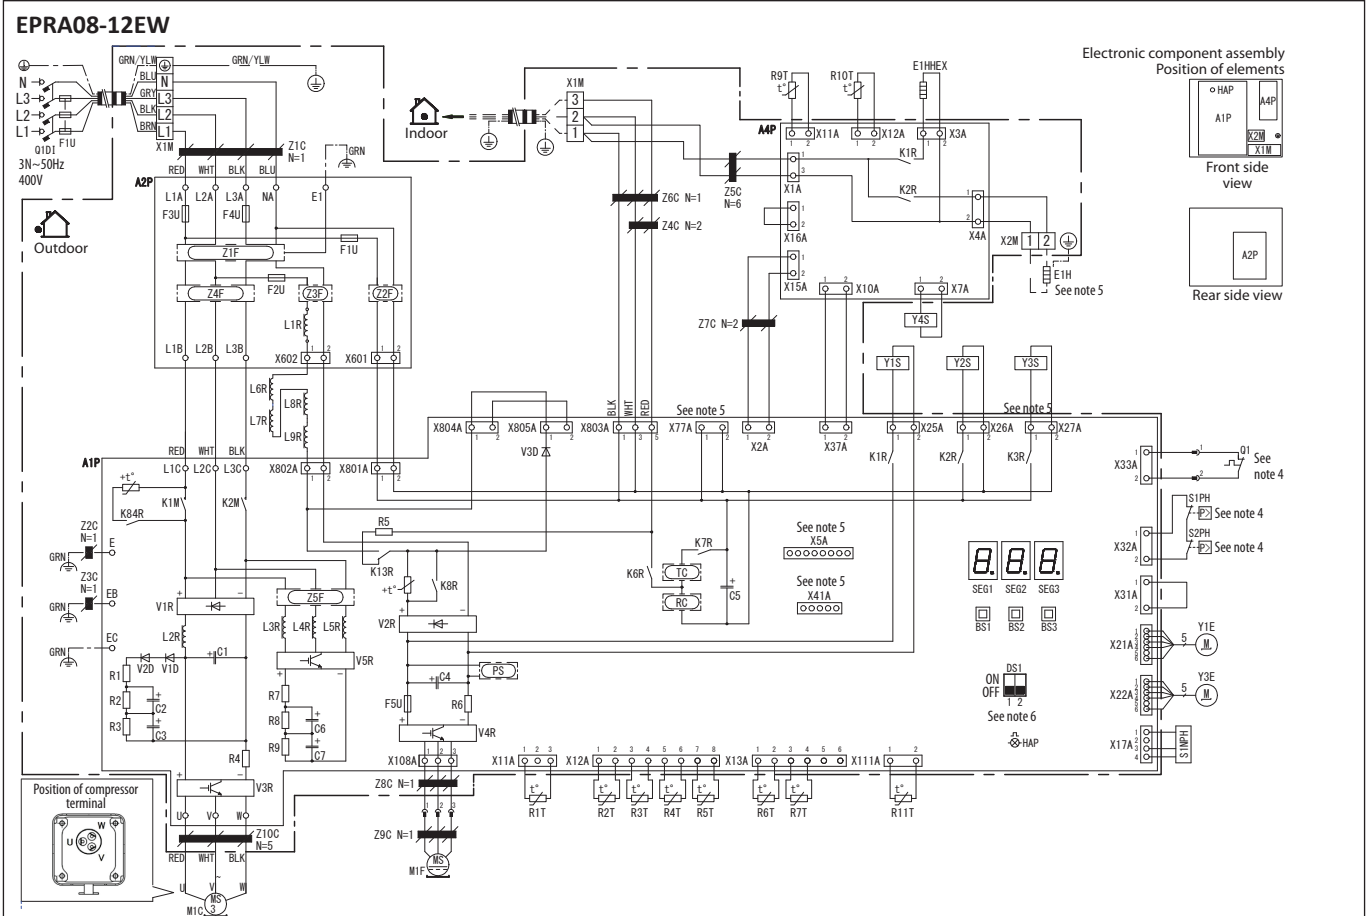

A1P	Printed circuit board (main)
A2P	Printed circuit board (noise filter)
A4P	Printed circuit board (ACS)
BS1~BS3 (A1P)	Push-button switch
C1 ~ C7 (A1P)	Capacitor
DS1 (A1P)	DIP switch
E1H	Drain tube heater (field supply)
E1HHEX	PHE heater
F1U	Field fuse (field supply)
F1U~F4U (A2P)	Fuse (T 6.3A / 250V)
F5U (A1P)	Fuse (T 5.0A / 250V)
HAP (A1P)	Light-emitting diode (service monitor is green)
K1R (A1P)	Magnetic relay (Y1S)
K1R (A4P)	Magnetic relay (E1HHEX)
K2R (A1P)	Magnetic relay (Y2S)
K2R (A4P)	Magnetic relay (E1H)
K3R (A1P)	Magnetic relay (Y3S)
K6R ~ K84R (A1P)	Magnetic relay
K1M ~ K2M (A1P)	Magnetic contactor
L1R ~ L9R (A1P, A2P)	Reactor
M1C	Motor (compressor)
M1F	Motor (fan)
PS (A1P)	Switching power supply
Q1DI	Earth leakage circuit breaker (30mA) (field supply)
Q1	Thermal overcurrent protector
R1 ~ R9 (A1P)	Resistor
R1T	Thermistor (ambient)
R2T	Thermistor (discharge)
R3T	Thermistor (suction)
R4T	Thermistor (heat exchanger liquid pipe)
R5T	Thermistor (heat exchanger middle)
R6T	Thermistor (refrigerant liquid)
R7T	Thermistor (injection)
R9T	Thermistor (inlet water)
R10T	Thermistor (outlet water)
R11T	Thermistor (fin)
RC (A1P)	Signal receiver circuit
S1NPH	High pressure sensor
S1PH~S2PH	High pressure switch
SEG* (A1P)	7-segment display

TC (A1P)	Signal transmission circuit
V1D ~ V3D (A1P)	Diode
V1R ~ V2R (A1P)	Diode module
V3R ~ V5R (A1P)	IGBT power module
X1M ~ X2M	Terminal strip
Y1E	Electronic expansion valve (main - black)
Y3E	Electronic expansion valve (injection - blue)
Y1S	Solenoid valve (4-way valve)
Y2S	Solenoid valve (low pressure bypass)
Y3S	Solenoid valve (hot gas bypass)
Y4S	Solenoid valve (liquid injection)
Z1C ~ Z10C	Noise filter (ferrite core)
Z1F ~ Z5F (A1P, A2P)	Noise filter

NOTES

- L : Live
 - N : Neutral
 - ⊕ : Protective earth
 - ⊕ : Noiseless earth
 - ▭ : Field wiring
 - ▭ : Terminal strip
 - : Connector
 - : Connection
- Colours: BLK: black, RED: red, BLU: bleu, WHT: white, GRN: green, YLW: yellow, PNK: pink, ORG: orange, GRY: grey, BRN: brown
- This wiring diagram applies only to the outdoor unit.
- When operating, do not short-circuit protection device Q1, S1PH and S2PH.
- Refer to the combination table and the option manual for how to connect the wiring to X5A, X77A, X41A and X2M.
- The factory setting of all switches is OFF, do not change the setting of the selector switch (DS1).



2D129646B

9 Sound data

9 - 1 Sound Pressure Spectrum

9

EPRA08-12EV
EPRA08-12EW

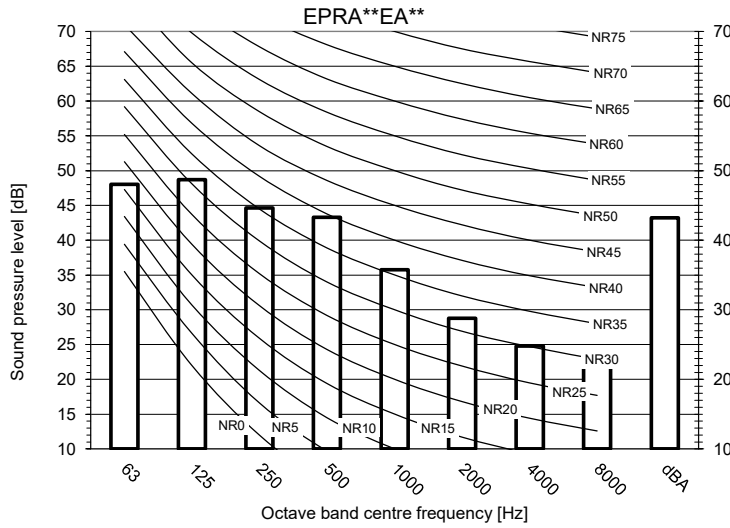

Maximum sound day	Maximum sound night	Maximum sound day Sound Power Level [dBA]			Maximum sound night Sound Power Level [dBA]		
		EPRA08EA*	EPRA10EA*	EPRA12EA*	EPRA08EA*	EPRA10EA*	EPRA12EA*
Default	Low noise level -1-	62	62	62	58,5	58,5	58,5
Low noise level -2-	Low noise level -3-	53	53	53	49,8	49,8	49,8



Full load (maximum fan rps and maximum compressor rps for the dedicated low noise mode)

Notes

- Data is valid at free field condition.
- Data is valid at nominal operation condition.
- Conditions: Ta DB/WB -7/-6 °C - LWC -55 °C
- dBA = A-weighted sound pressure level (A scale according to IEC).
- Reference acoustic pressure 0 dB = 20 µPa
- If the sound is measured under actual installation conditions, the measured value will be higher due to environmental noise and sound reflections.


3D133527A

EPRA08-12EV
EPRA08-12EW

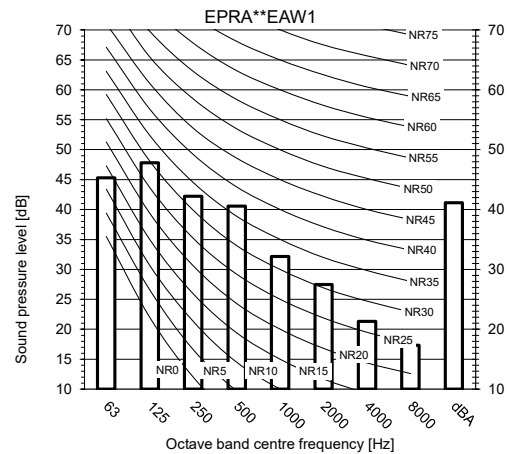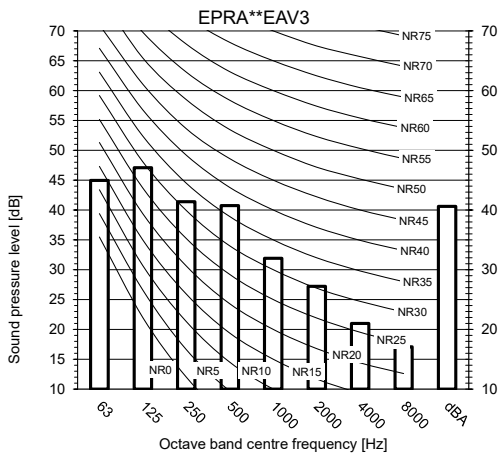

Maximum sound day	Maximum sound night	Maximum sound day Sound Power Level [dBA]			Maximum sound night Sound Power Level [dBA]		
		EPRA08EA*	EPRA10EA*	EPRA12EA*	EPRA08EA*	EPRA10EA*	EPRA12EA*
Default	Low noise level -1-	62	62	62	58,5	58,5	58,5
Low noise level -2-	Low noise level -3-	53	53	53	49,8	49,8	49,8

Full load (maximum fan rps and maximum compressor rps for the dedicated low noise mode)



Notes

- Data is valid at free field condition.
- Data is valid at nominal operation condition.
- Conditions: Ta DB/WB -7/-6 °C - LWC -35 °C
- dBA = A-weighted sound pressure level (A scale according to IEC).
- Reference acoustic pressure 0 dB = 20 µPa
- If the sound is measured under actual installation conditions, the measured value will be higher due to environmental noise and sound reflections.



3D133528A

9 Sound data

9 - 1 Sound Pressure Spectrum

EPRA08-12EV


EPRA08-12EW

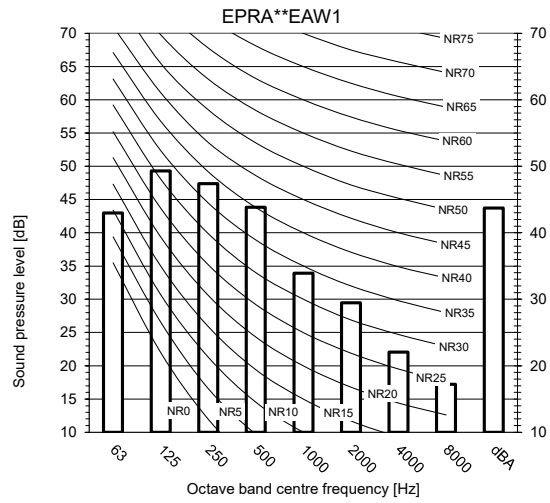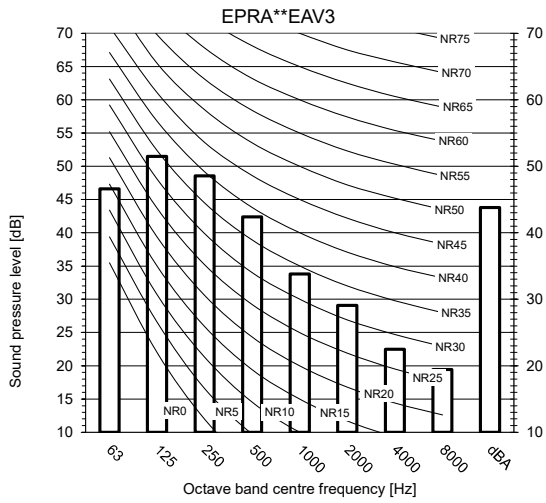

Notes




- Data is valid at free field condition.
- Data is valid at nominal operation condition.
- dBA = A-weighted sound pressure level (A scale according to IEC).
- Reference acoustic pressure 0 dB = 20 µPa
- If the sound is measured under actual installation conditions, the measured value will be higher due to environmental noise and sound reflections.

Measuring location (discharge side)



3D133529A


EPRA08-12EW

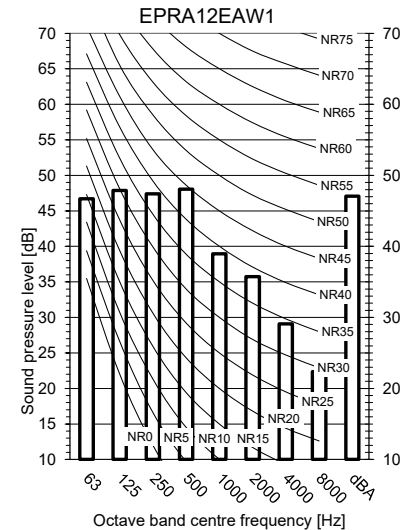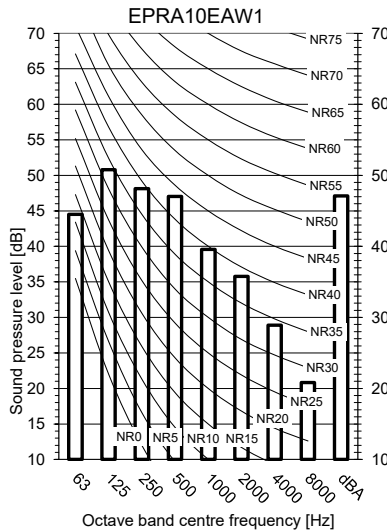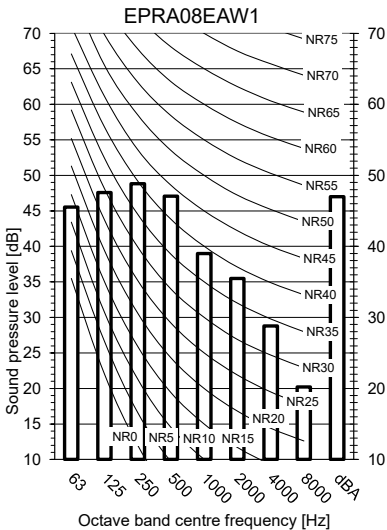

Notes

- Data is valid at free field condition.
- Data is valid at nominal operation condition.
- dBA = A-weighted sound pressure level (A scale according to IEC).
- Reference acoustic pressure 0 dB = 20 µPa
- If the sound is measured under actual installation conditions, the measured value will be higher due to environmental noise and sound reflections.

Measuring location (discharge side)



3D133530


10 Installation

10 - 1 Installation Method

10

EPRA08-12EV
EPRA08-12EW



Minimum space for air passage

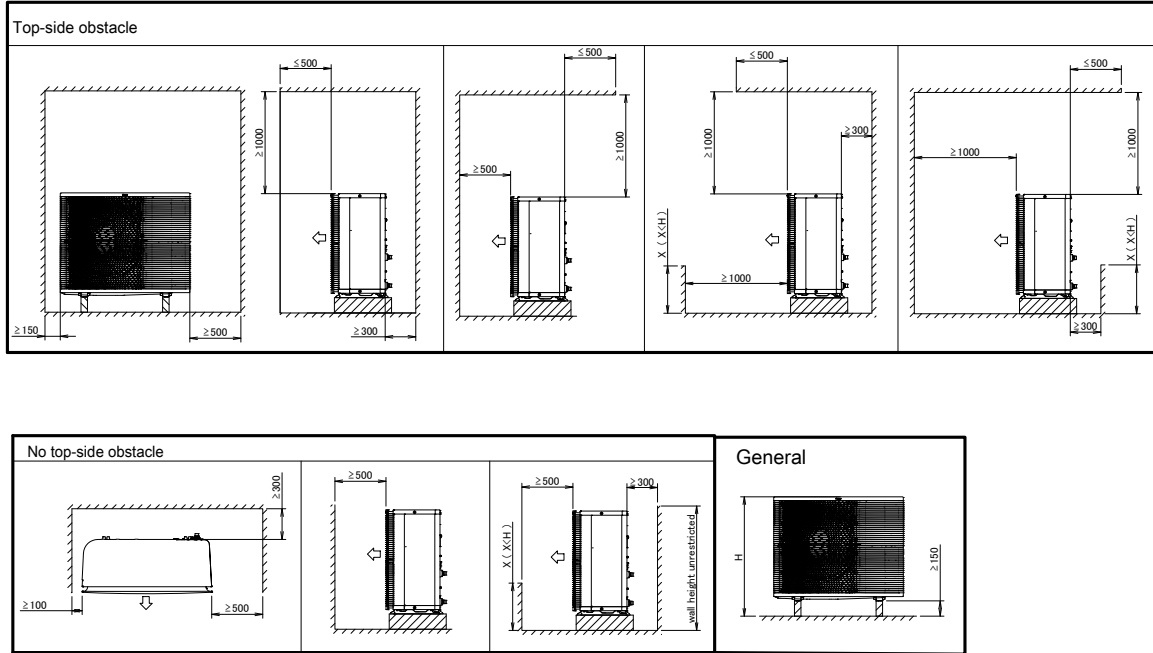


3D124412

11 Operation range

11 - 1 Operation Range

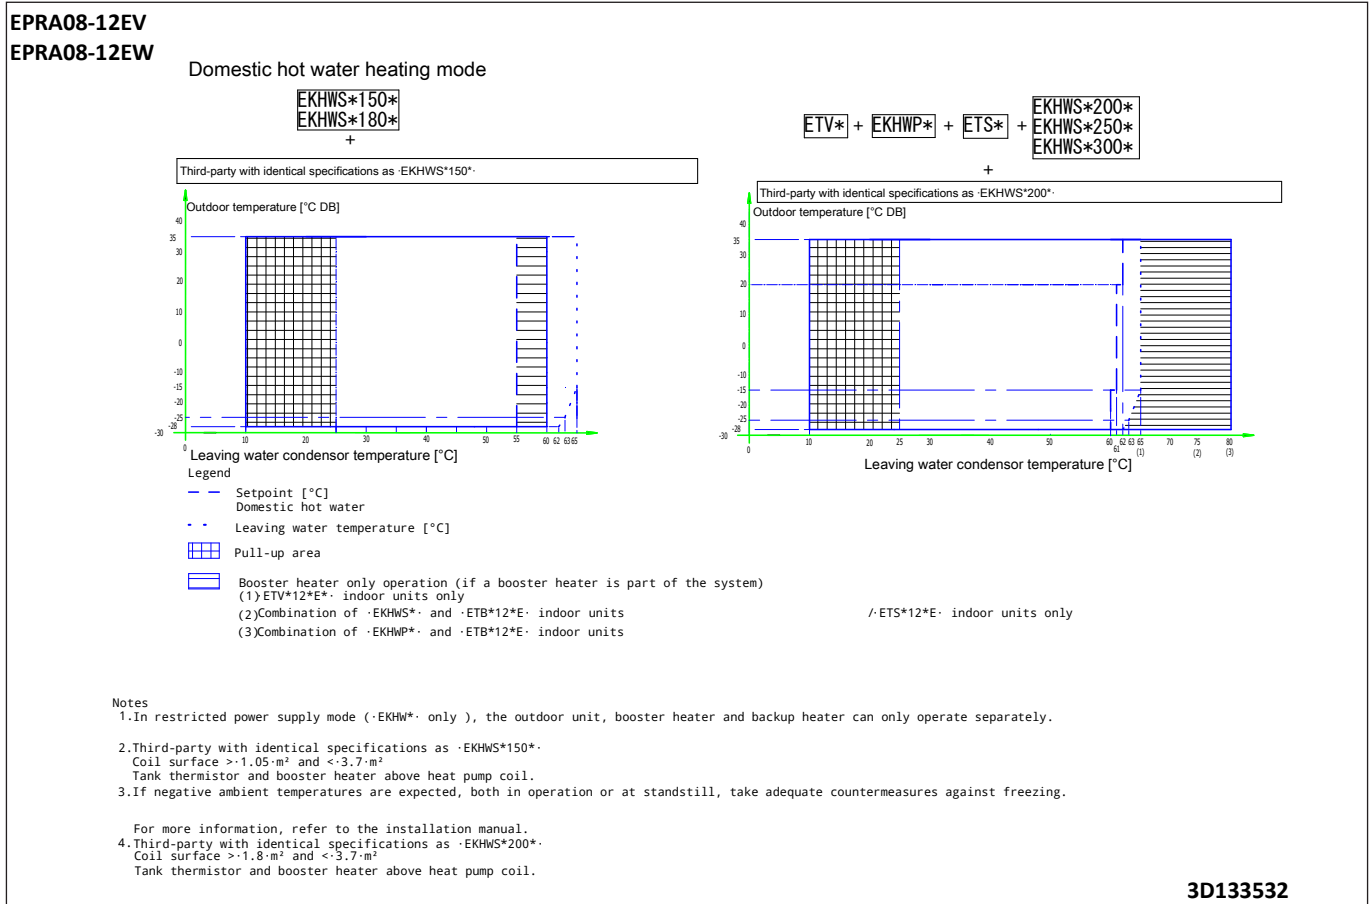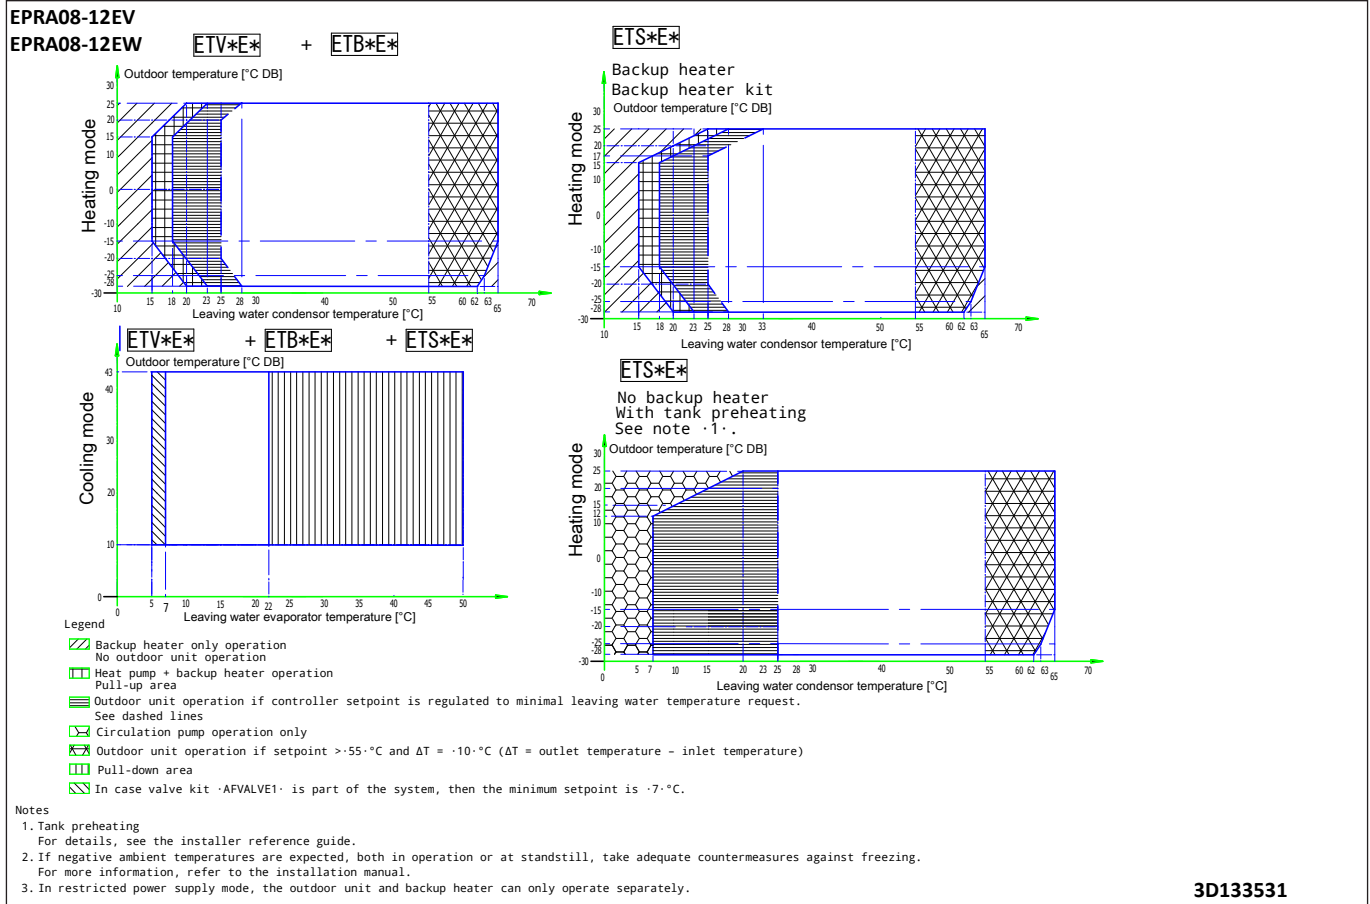



EEEDEN22

02/2022



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.