



TERMA

SINCE 1990



Grzejnik

Iron S 1315 ↓ x 500 ↔ GD,
radiator colour: Graphite, masking front colour: Graphite
radiator code: WGIRS131050 KGRPGD
masking front code: WRCIRX131 KGRP

Valves and accessories

Integrated thermostatic valve, angled, left, Chrome
SLIM thermostatic head, Chrome
Integrated pipe-masking set, Chrome

251 COLORS




IRON S





AVAILABLE SIZES

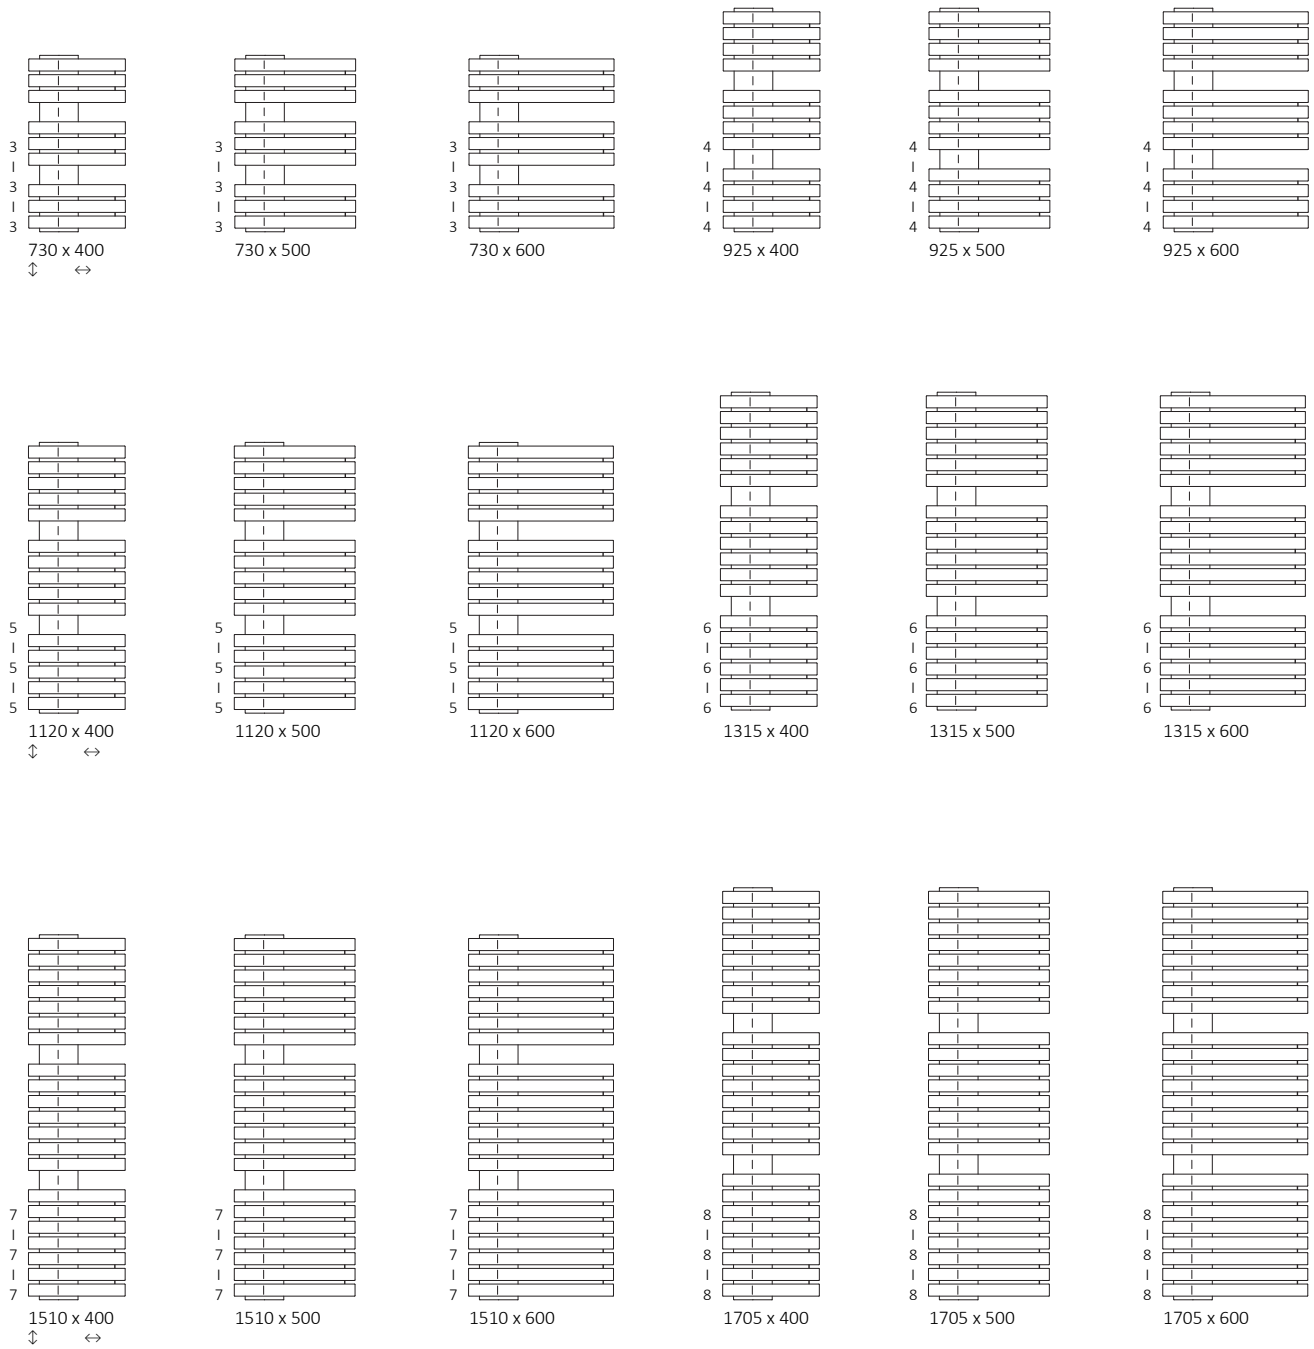


NOTE: THE COMPLETE PRODUCT CONSISTS OF TWO PARTS: THE RADIATOR AND THE MASKING FRONT.

1. RADIATOR

CENTRAL HEATING / DUAL FUEL

Connections:





Height A ↕ [mm]	Width B ↔ [mm]	Heating power – powder paint			Product code <small>... Configuration p. 9</small>
		75/65/20°C [W]	55/45/20°C [W]	 [W]	
730	400	461	246	400	WGIRS073040...
730	500	567	302	600	WGIRS073050...
730	600	672	357	600	WGIRS073060...
925	400	578	307	600	WGIRS092040...
925	500	712	378	800	WGIRS092050...
925	600	843	446	800	WGIRS092060...
1120	400	695	368	800	WGIRS112040...
1120	500	855	452	800	WGIRS112050...
1120	600	1012	535	1000	WGIRS112060...
1315	400	810	427	800	WGIRS131040...
1315	500	996	525	1000	WGIRS131050...
1315	600	1180	622	1200	WGIRS131060...
1510	400	924	486	1000	WGIRS151040...
1510	500	1137	598	1000	WGIRS151050...
1510	600	1347	709	1200	WGIRS151060...
1705	400	1037	545	1000	WGIRS170040...
1705	500	1276	670	1200	WGIRS170050...
1705	600	1511	794	1500	WGIRS170060...

DIMENSIONS AND TECHNICAL INFORMATION

Working pressure: 600 kPa

Maximum operating temperature: 95°C

Height A ↕ [mm]	Width B ↔ [mm]	Spacing connection C1 [mm]	Spacing horizontal fasteners D [mm]	Spacing vertical fasteners E [mm]	Bottom fasteners position F [mm]	Capacity  [dm ³]	Weight  [kg]
730	400	50	50	530	100	3,30	13,28
730	500	50	50	530	100	3,90	15,76
730	600	50	50	530	100	4,51	18,27
925	400	50	50	725	100	4,34	17,35
925	500	50	50	725	100	5,14	20,66
925	600	50	50	725	100	5,95	23,98
1120	400	50	50	920	100	5,37	21,41
1120	500	50	50	920	100	6,37	25,55
1120	600	50	50	920	100	7,38	29,71
1315	400	50	50	1115	100	6,40	25,47
1315	500	50	50	1115	100	7,61	30,44
1315	600	50	50	1115	100	8,82	35,43
1510	400	50	50	1310	100	7,44	29,53
1510	500	50	50	1310	100	8,84	35,33
1510	600	50	50	1310	100	10,25	41,16
1705	400	50	50	1505	100	8,47	33,60
1705	500	50	50	1505	100	10,08	40,22
1705	600	50	50	1505	100	11,69	46,88

ELECTRIC RADIATOR



Connections:




Height A ↕ [mm]	Width B ↔ [mm]	Heating power – powder paint [W]	Product code ... Configuration p. 10
925	400	600	WLIRS092040...
925	500	800	WLIRS092050...
925	600	800	WLIRS092060...
1120	400	800	WLIRS112040...
1120	500	800	WLIRS112050...
1120	600	1000	WLIRS112060...
1315	400	800	WLIRS131040...
1315	500	1000	WLIRS131050...

Height A ↕ [mm]	Width B ↔ [mm]	Heating power – powder paint [W]	Product code ... Configuration p. 10
1315	600	1200	WLIRS131060...
1510	400	1000	WLIRS151040...
1510	500	1200	WLIRS151050...
1510	600	1500	WLIRS151060...
1705	400	1000	WLIRS170040...
1705	500	1200	WLIRS170050...
1705	600	1500	WLIRS170060...


DIMENSIONS AND TECHNICAL INFORMATION

Height A ↕ [mm]	Width B ↔ [mm]	Spacing horizontal fasteners D [mm]	Spacing vertical fasteners E [mm]	Bottom fasteners position F [mm]	Capacity  [dm ³]	Weight  [kg]
925	400	50	725	100	4,34	20,87
925	500	50	725	100	5,14	24,82
925	600	50	725	100	5,95	28,80
1120	400	50	920	100	5,37	25,76
1120	500	50	920	100	6,37	30,71
1120	600	50	920	100	7,38	35,69
1315	400	50	1115	100	6,40	30,65
1315	500	50	1115	100	7,61	36,60
1315	600	50	1115	100	8,82	42,57
1510	400	50	1310	100	7,44	35,56
1510	500	50	1310	100	8,84	42,49
1510	600	50	1310	100	10,25	49,46
1705	400	50	1505	100	8,47	40,46
1705	500	50	1505	100	10,08	48,38
1705	600	50	1505	100	11,69	56,35

2. MASKING FRONT


A ↕ [mm]	B ↔ [mm]	Weight  [kg]	Product code ... Configuration p. 11
730	400	1,62	WRCIRX073...
730	500	1,62	WRCIRX073...
730	600	1,62	WRCIRX073...
925	400	2,06	WRCIRX092...
925	500	2,06	WRCIRX092...
925	600	2,06	WRCIRX092...
1120	400	2,50	WRCIRX112...
1120	500	2,50	WRCIRX112...
1120	600	2,50	WRCIRX112...
1315	400	2,93	WRCIRX131...
1315	500	2,93	WRCIRX131...
1315	600	2,93	WRCIRX131...
1510	400	3,36	WRCIRX151...
1510	500	3,36	WRCIRX151...
1510	600	3,36	WRCIRX151...
1705	400	3,79	WRCIRX170...
1705	500	3,79	WRCIRX170...
1705	600	3,79	WRCIRX170...

TECHNICAL DRAWING

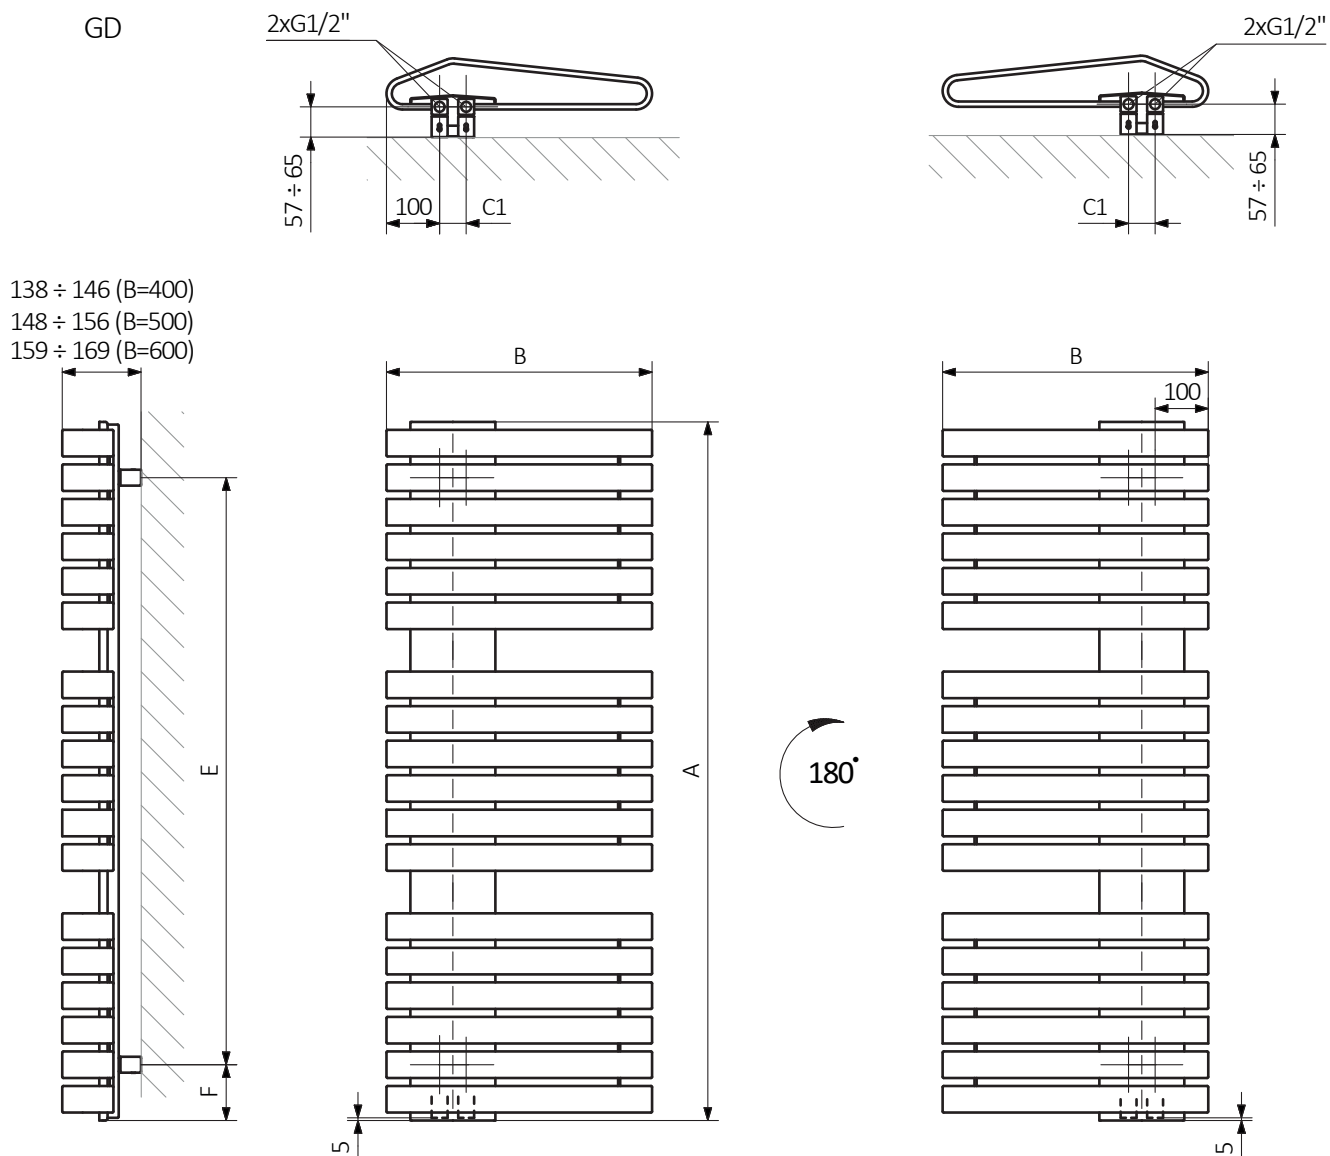


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:




Pipe:



CONFIGURATION CODE FOR A TOWEL RAIL OR RADIATOR ("WG" PRODUCT GROUP)

Product codes can be found in the product tables in both the catalogue and the price list. They provide basic information about the product and the configuration code contains information that complements the specification. When placing an order, the product codes should contain the fully completed configuration part. Part of the configuration code should be placed after the main product code as shown in the example below:

CODE DETAILS:

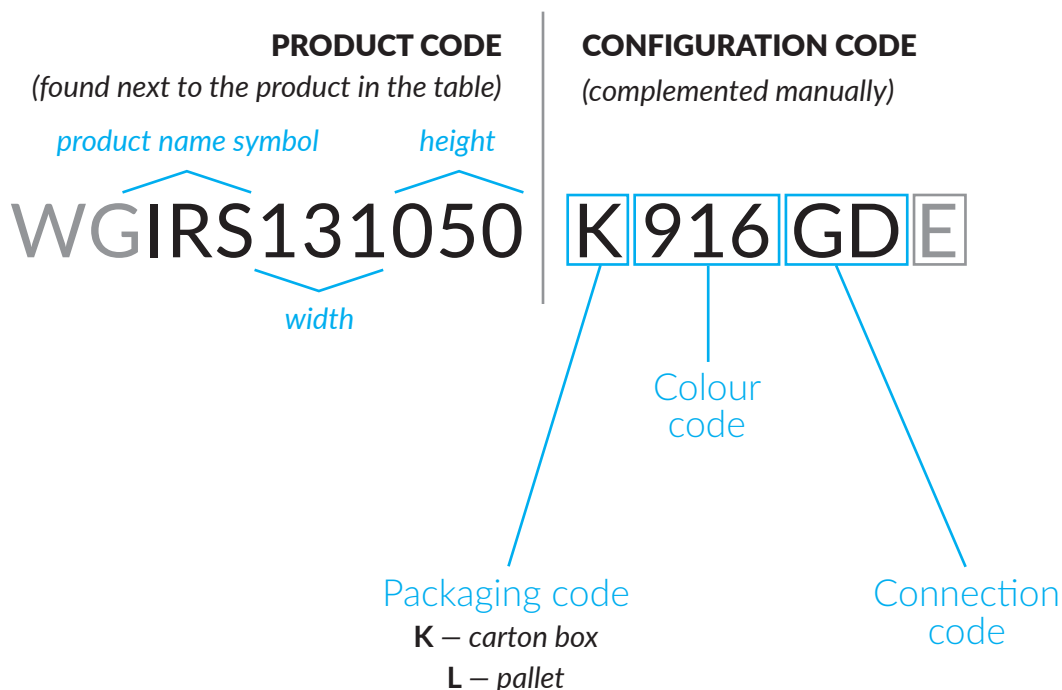


WG – water or dual fuel, central heating towel rail or radiator

E – the epoxy primer (additional coating increases the corrosion resistance of the product).

A CONFIGURATION CODE FOR AN ELECTRIC TOWEL RAIL OR RADIATOR FILLED WITH OIL AND FITTED WITH A HEATING ELEMENT (PRODUCT GROUP "WL")

Product codes can be found in the product tables in both the catalogue and the price list. They provide basic information about the product, and the configuration code contains information that complements the specification. When placing an order, the product codes should contain the fully completed configuration part. Part of the configuration code should be placed after the main product code as shown in the example below:

CODE DETAILS:

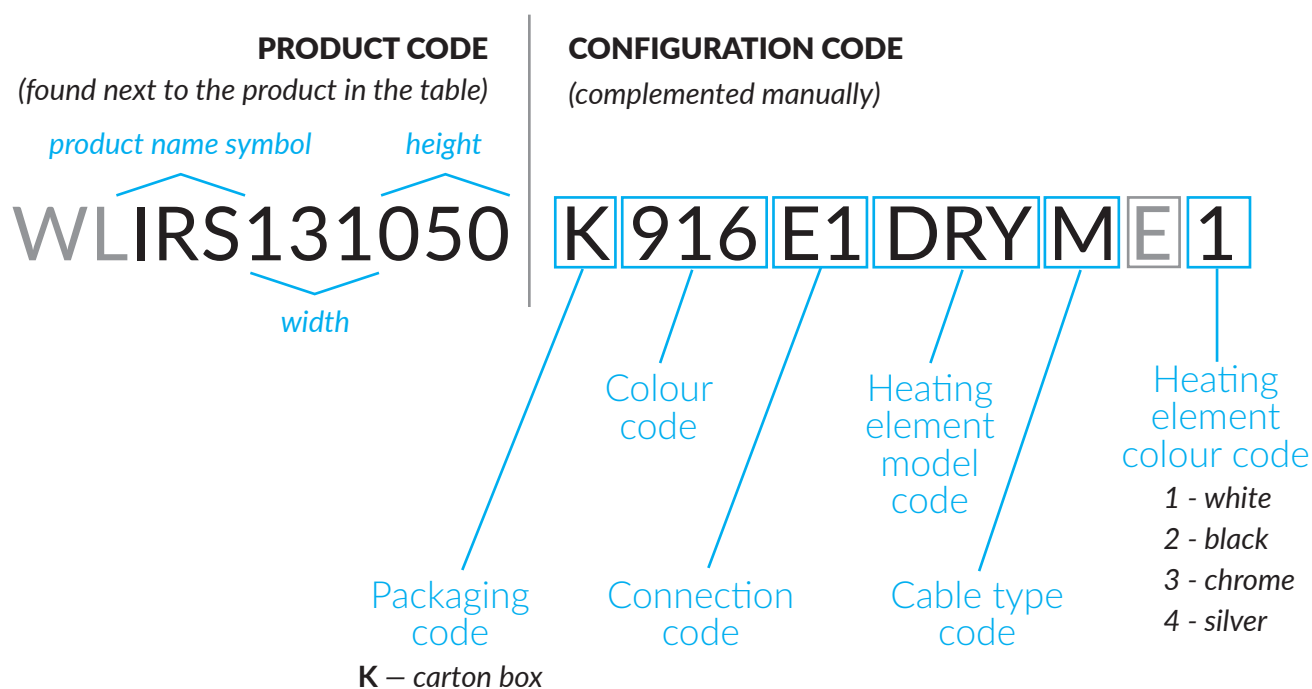


WL – electric towel rail or radiator filled with Oil and fitted with a factory installed heating element

E – the epoxy primer (additional coating increases the corrosion resistance of the product). The extra charge for the epoxy coating is 150 PLN net. In case you don't want the epoxy coating, the "E" should be replaced with an "X".

CONFIGURATION CODE FOR ACCESSORIES AND MASKING FRONT FOR MICHELLE, IRON, CASE SLIM RADIATORS WITH METAL AND MIRROR CASE (PRODUCT GROUP "WR")

Product codes can be found in the product tables in both the catalogue and the price list. They provide basic information about the product, and the configuration code contains information that complements the specification. When placing an order, the product codes should contain the fully completed configuration part. Part of the configuration code should be placed after the main product code as shown in the example below:

CODE DETAILS:

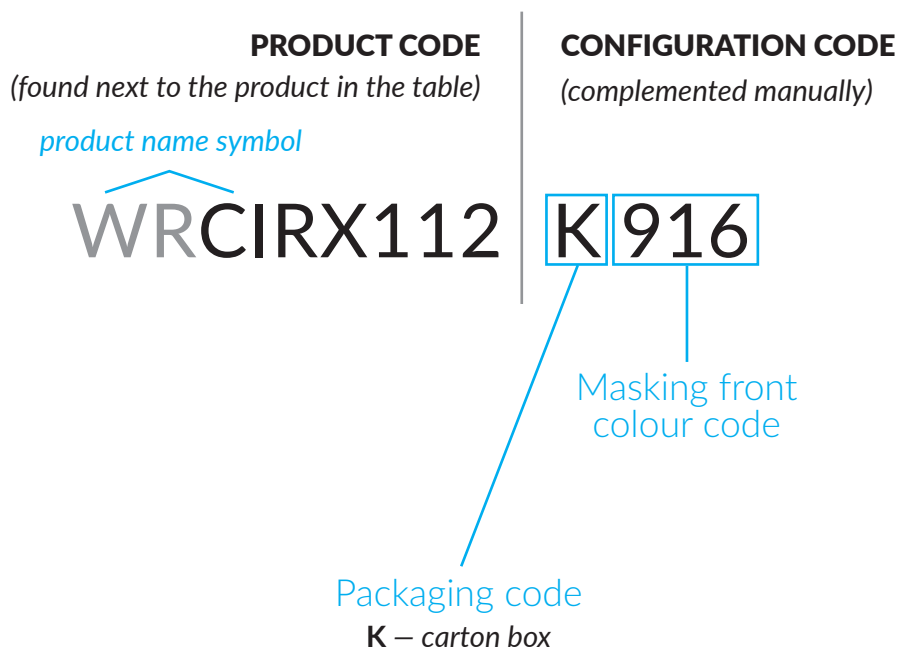

WR – configurable accessory

E – the epoxy primer (additional coating increases the corrosion resistance of the product).

