


Warp T Bold One



 colour included
in the price

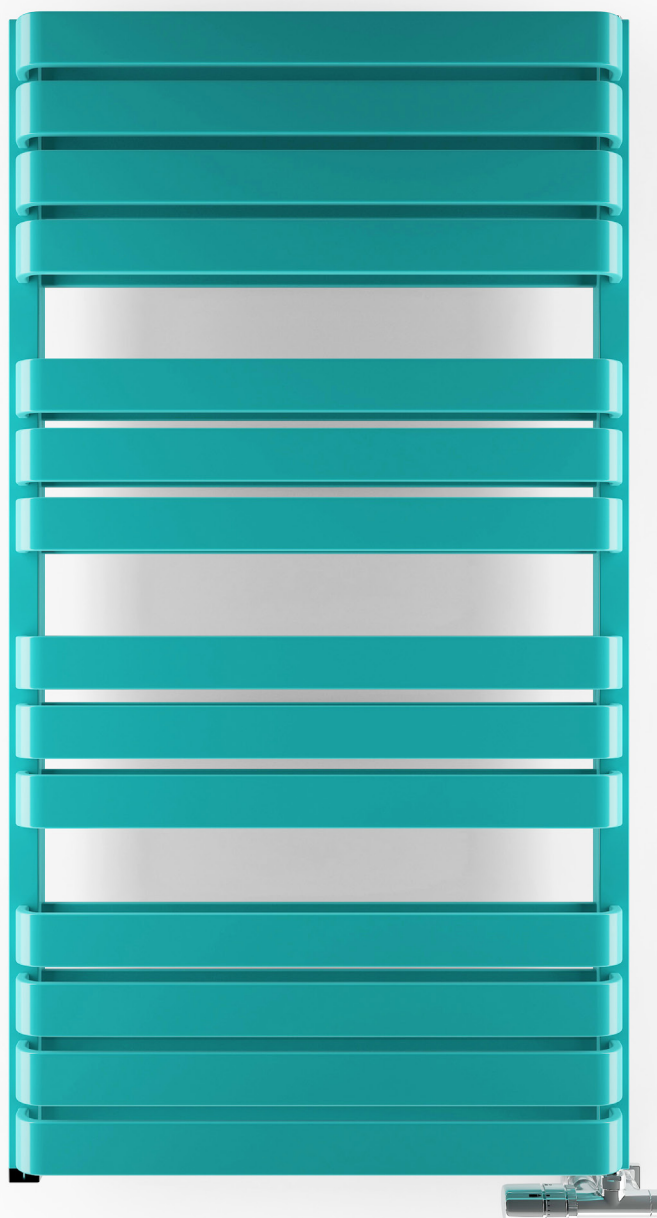


Warp T Bold One 1110↓ × 500↔ S1
colour: RAL 5018

Angled integrated thermostatic valve set with immersion tube, right, chrome
Integrated pipe-masking set, chrome
ONE heating element



TERMA

SINCE 1990

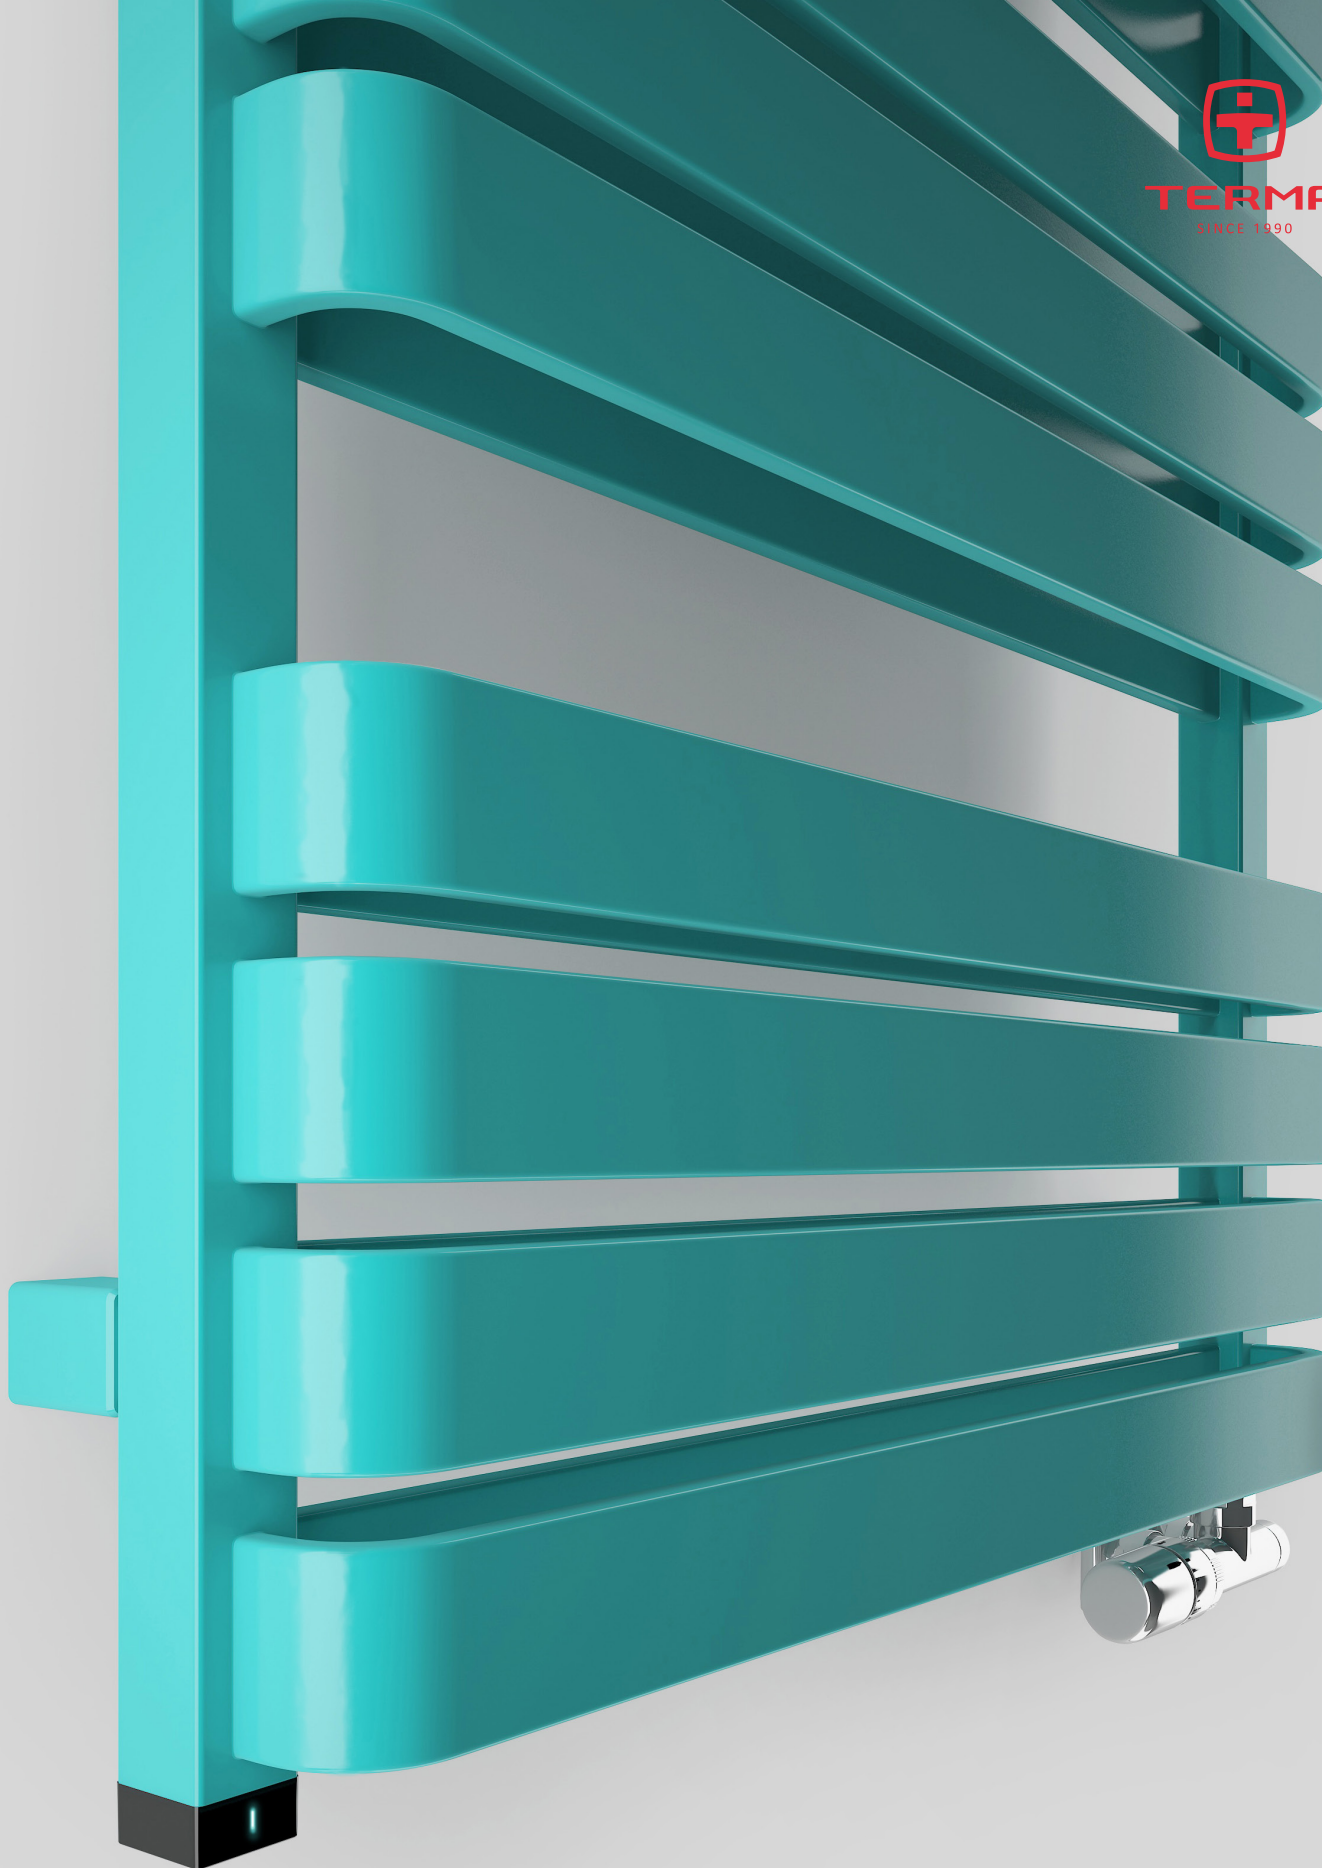


Warp T Bold One




Standard connections:

A \updownarrow 655÷1110:




Electric radiators:

A \updownarrow 1110:



Available sizes:

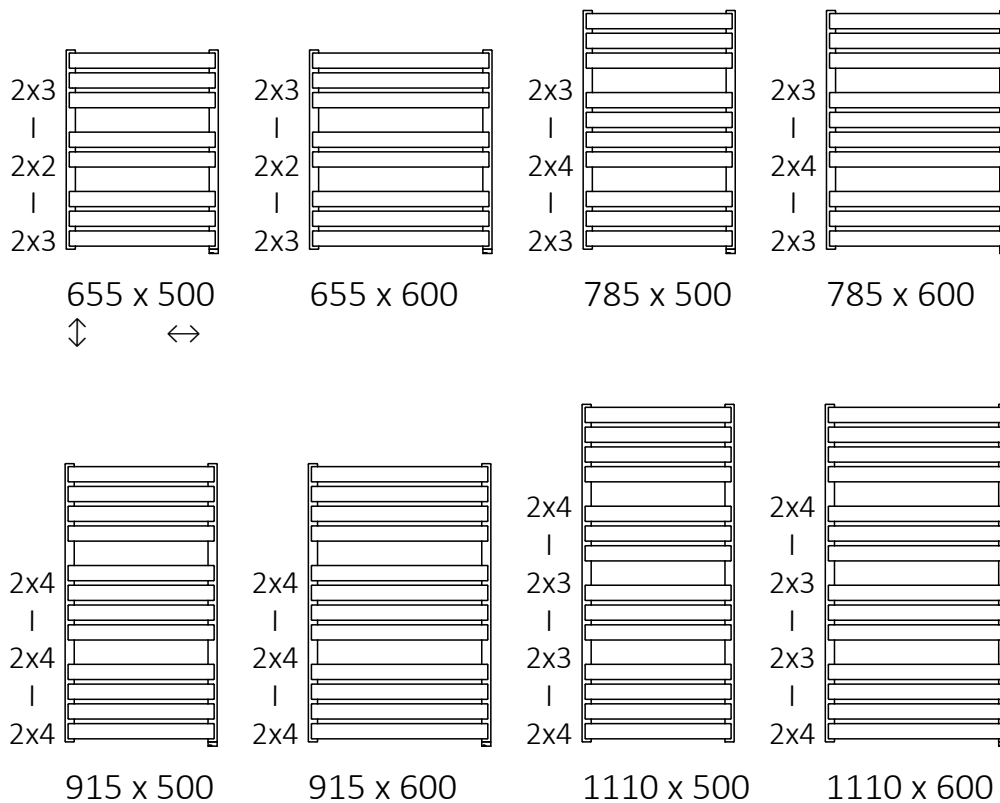

Warp T Bold One



colour included in the price

Water heaters – specification:

Working pressure: 600 kPa Maximum operating temperature: 82°C

Electrical specification:

Power supply:	230 V / 50 Hz
Device protection class:	Class I
Ingress protection [IP]:	IPx5

A ↓ [mm]	B ↔ [mm]	75 65 20°C [W]	55 45 20°C [W]	[W]	D [mm]	E [mm]	F [mm]	[dm³]	[kg]	Product Code <small>configuration code p. 6</small>
655	500	460	249	400	470	515	70	3,48	17,07	WZWBN065050
655	600	545	294	600	570	515	70	4,00	20,28	WZWBN065060
785	500	551	297	600	470	645	70	4,30	21,15	WZWBN078050
785	600	653	255	600	570	645	70	4,96	25,16	WZWBN078060
915	500	643	346	600	470	775	70	5,12	25,23	WZWBN091050
915	600	761	408	800	570	775	70	5,91	30,05	WZWBN091060
1110	500	780	419	800	470	970	70	6,04	29,48	WZWBN111050
1110	600	924	491	1000	570	970	70	6,96	35,10	WZWBN111060

Electric heaters – specification:

A ↓ [mm]	B ↔ [mm]	[W]	D [mm]	E [mm]	F [mm]	[dm³]	[kg]	Product Code <small>configuration code p. 6</small>
785	500	600	470	585	100	4,30	24,63	WWWBN078050
785	600	800	570	585	100	4,96	29,18	WWWBN078060
915	500	800	470	715	100	5,12	29,38	WWWBN091050
915	600	800	570	715	100	5,91	34,84	WWWBN091060
1110	500	800	470	910	100	6,04	34,37	WWWBN111050
1110	600	1000	570	910	100	6,96	40,74	WWWBN111060


Warp T Bold One







colour included
in the price

Technical drawing:

S8

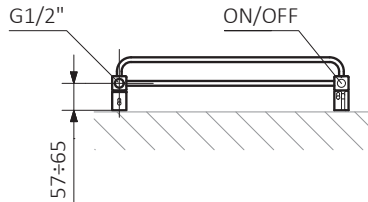



S1

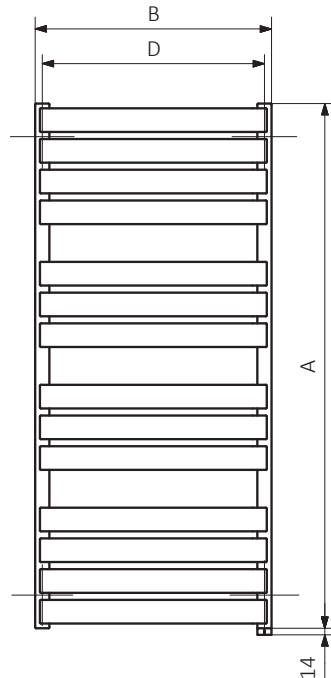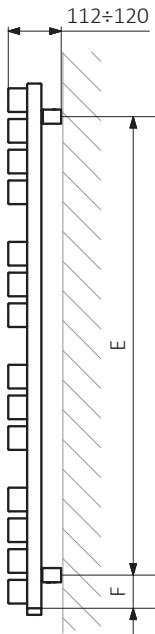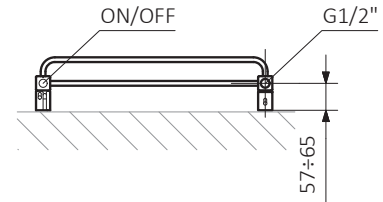

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector :

Pipe :



Warp T Bold One



In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a configuration code of a water radiator with a built-in One heating element:

WZWBN065050

PRODUCT CODE
(located in the table for the product)


K916S1E

CONIGURATION CODE
(supplemented by hand)

Cable Type

- W – straight cable with plug
- P – straight cable without plug
- U – spiral cable with plug

Example Configuration

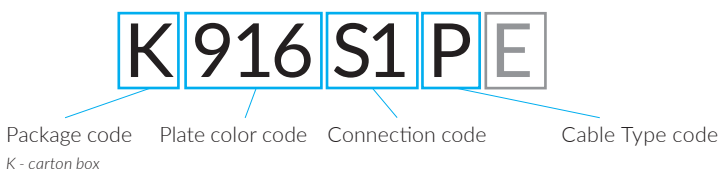

The Construction of the product and configuration code for a radiator with the built-in heating element ONE:

WWWBN111050

PRODUCT CODE
(located in the table for the product)


K916E1WE1

CONIGURATION CODE
(supplemented by hand)

Cable Type

- W – straight cable with plug
- P – straight cable without plug
- U – spiral cable with plug

Example Configuration

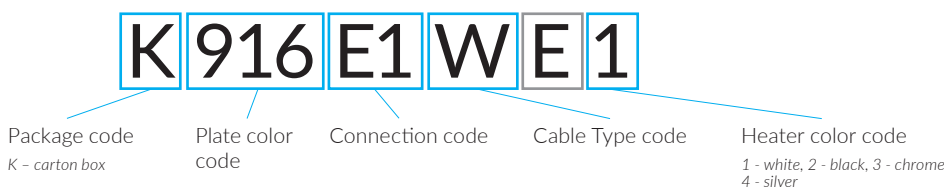

Epoxy primer

E – Code of epoxy primer is an extra processes.

WZWBN065050 K916S1 **E** — Extra processes or additions code

Warp T Bold One



 colour included in the price

Legend




Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.