

Plain wersja 860 wisząca



Plain 860 x 688

kolor: Flat Black

Plain wersja 860 wisząca




Podłączenia:




Dostępne rozmiary:




860 x 80
1 sekcja




860 x 278
3 sekcje




860 x 360
4 sekcje




860 x 442
5 sekcji




860 x 524
6 sekcji




860 x 606
7 sekcji




860 x 688
8 sekcji




860 x 770
9 sekcji




860 x 852
10 sekcji




860 x 934
11 sekcji




860 x 1016
12 sekcji




860 x 1098
13 sekcji




860 x 1180
14 sekcji



860 x 1262
15 sekcji



860 x 1344
16 sekcji




860 x 1426
17 sekcji

Dane techniczne:

Ciśnienie robocze: 1000 kPa. Maksymalna temperatura pracy: 95°C.

A ↑↓	B ↔	C [mm]	D [mm]	D' [mm]	D'' [mm]	75/65/20°C [W]	55/45/20°C [W]	↳ [dm³]	⚖ [kg]
860	80	760	-	-	-	161	86	4,14	11,7
860	278	760	82	98	-	483	258	12,42	36,2
860	360	760	-	98	-	644	344	16,56	47,9
860	442	760	246	98	-	805	429	20,70	59,6
860	524	760	-	98	-	966	515	24,84	71,3
860	606	760	246	180	-	1127	601	28,98	83,0
860	688	760	328	180	-	1288	687	33,12	94,7
860	770	760	410	180	-	1449	773	37,26	106,4
860	852	760	492	180	-	1610	859	41,40	118,1
860	934	760	574	180	164	1771	945	45,54	129,8
860	1016	760	656	180	164	1932	1031	49,68	141,5
860	1098	760	738	180	246	2093	1116	53,82	153,2
860	1180	760	820	180	246	2254	1202	57,96	164,9
860	1262	760	902	180	246	2415	1288	62,10	176,6
860	1344	760	1066	180	246	2576	1374	66,24	188,3
860	1426	760	1230	180	246	2737	1460	70,38	200,0

Plain wersja 860 wisząca

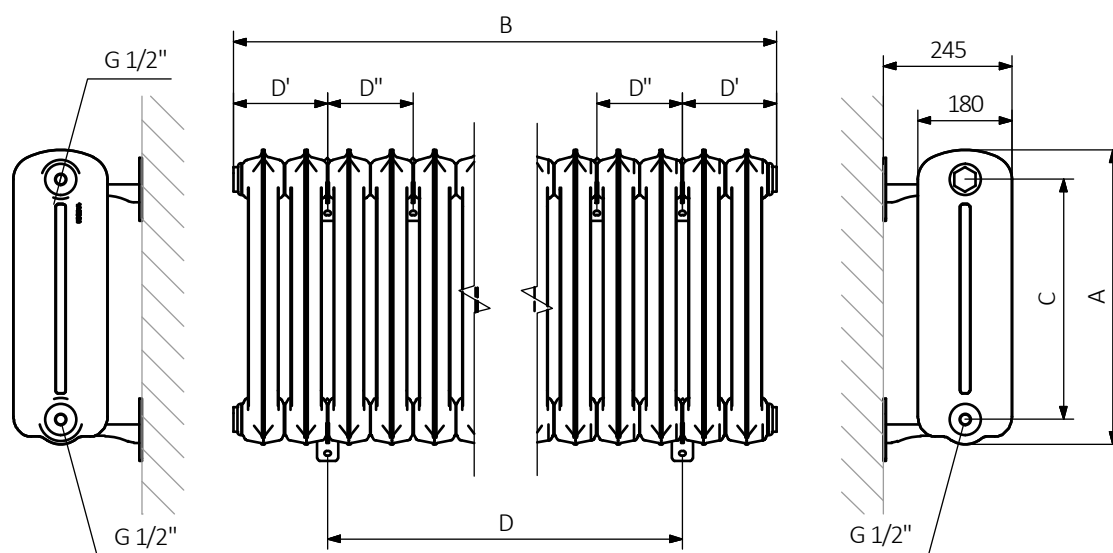

A – wysokość B – szerokość C – rozstaw połączeń D – rozstaw konsol w poziomie